

# **Guide to the OLE System Administration Module**

---

---

---

# Table of Contents

Introduction .....	v
1. System Administration Documents .....	1
System Submenu Groups .....	1
Identity .....	2
Menu Access to KIM Functions .....	2
Basic KIM Concepts .....	2
Person .....	3
Group .....	11
Role .....	14
Permission .....	22
Responsibility .....	27
Locations .....	32
Campus .....	32
Country .....	33
County .....	34
Postal Code .....	35
State .....	37
Identity Management Reference .....	38
Address Type .....	38
Affiliation Type .....	39
Campus Type .....	40
Citizenship Status .....	41
Email Type .....	42
Employee Status .....	43
Employee Type .....	44
Entity Type .....	45
External Identifier Type .....	46
Name Type .....	47
Phone Type .....	48
Role/Group/Permission/Responsibility Type .....	49
2. Location Administrative Documents .....	51
Location Level .....	51
Document Layout .....	51
Location .....	52
Document Layout .....	53
Location Import .....	54
Process Overview .....	54
Business Rules .....	55
Location Summary .....	55
Process Overview .....	56
3. Batch Administrative Documents .....	57
Batch Job .....	57
Deliver Notices .....	57
Batch/Scheduled Jobs .....	57
Batch Semaphore File Upload .....	57
Batch File .....	57
Schedule .....	59
4. Batch Framework Administrative Documents .....	64
Batch Process Type .....	64
Batch File Type .....	65
Batch Process Filter Criteria .....	65

Batch Process Profile .....	66
Document Layout .....	67
Batch Process .....	79
Process Overview .....	79
Batch Process Job Details .....	82
Batch Process Schedule .....	82
5. Kualiti OLE Modules Administrative Documents .....	83
KRMS Builder and Staff Upload .....	83
People Flow .....	83
Getting Started .....	84
Document Layout .....	85
6. KRMS Rules Administrative Documents .....	88
Agenda Lookup .....	88
Document Layout .....	89
Context Maintenance .....	92
Document Layout .....	93
Term, Term Specification and Category Lookups .....	94
7. Global Configuration Settings Administration Documents .....	95
External Data Sources (z39.50 connection) .....	95
Document Layout .....	95
Bib Import Preferences .....	96
Document Layout .....	97
8. Configuration Administrative Documents .....	99
OLE .....	99
Data Mapping Field Definition .....	99
Functional Field Description .....	102
Message Of The Day .....	103
System Options .....	104
Workflow .....	107
Document Type .....	107
Routing & Identity Management Document Type Hierarchy .....	111
Workflow Attribute .....	117
XML Import .....	118
Parameters .....	119
Namespace .....	119
Parameter .....	120
Parameter Component .....	122
Parameter Type .....	123
Technical .....	124
Configuration Viewer .....	125
Cache Management .....	125
9. Monitoring Administrative Documents .....	127
Service Bus .....	127
Message Queue .....	127
Service Registry .....	129
Thread Pool .....	130
Quartz .....	130
Security Management .....	131
Workflow .....	131
Document Operation .....	131
Statistics Report .....	136

---

# Introduction

This guide provides information about using OLE system administration functions available via the user interface. Users with proper authorization are able to perform powerful functions that affect the entire system. These functions, which are accessible via the **Admin** menu tab, allow you to:

- Support the Kualu Identity Management (KIM) module and implement security based on accounting line attributes
- Define basic types of location and reference information
- Control the running of batch jobs
- Support the Kualu Enterprise Workflow (KEW) module and
- Enable authorized users to perform a variety of other functional and technical activities.

## Note

Only members of OLE-SYS Manager and KR-SYS Technical Administrator roles may initiate most documents in the Admin Menu. Other users may look up values from the lookup screens but may not be able to access other options at all.

This guide is organized to follow the layout of the Admin tab. Please note that some submenus are not covered in this guide.

- System provides access to KIM identity (roles and permissions) and locations, as well as identity management references (maintenance documents associated with KIM identities).
- Location provides access to creating and maintaining locations and location levels for the maintenance of library records.
- Batch allows users to upload files used by various OLE batch jobs, run batch jobs and see files generated by those jobs for Financial Processing, General Ledger, and System processes.
- Batch Framework submenu allows users to perform a variety of functional and technical activities that process cataloging records in batch.
- Kualu OLE Modules submenu allows you to perform a variety of functional and technical activities that affect the entire system. This includes uploading XML and People Flow rules to modify workflows. Users may also access the Staff Upload interface.
- KRMS Rules provides access to agendas, context, attribution, term and category lookups.
- Global Configuration Settings provide access to administering export and global import services.
- Configuration provides access to high level configuration options. Users may modify workflows and parameters for OLE.
- Monitoring provides access to the Kualu Service Bus and additional workflow documentation.

These sections are divided into subsections covering individual functions in the menu grouping. For each function, the applicable subsection presents a breadcrumb trail showing you how to access the function, information about the layout of and fields on the applicable screen(s), and where appropriate, additional information to help you use the screen(s).

## Note


In order to work efficiently, you need to understand the basics of the OLE's user interface. For information and instructions about logging on and off, navigating, understanding the components of screens, and performing basic operations in the screens, see the [OLE Basic Functionality and Key Concepts](#).

This guide as well as guides to other OLE modules are available for download from the [OLE Documentation Portal](#).

## Tip

Bookmark any page within OLE. This will allow you to easily navigate back to an interface or e-doc in one click, just log in.

# Chapter 1. System Administration Documents

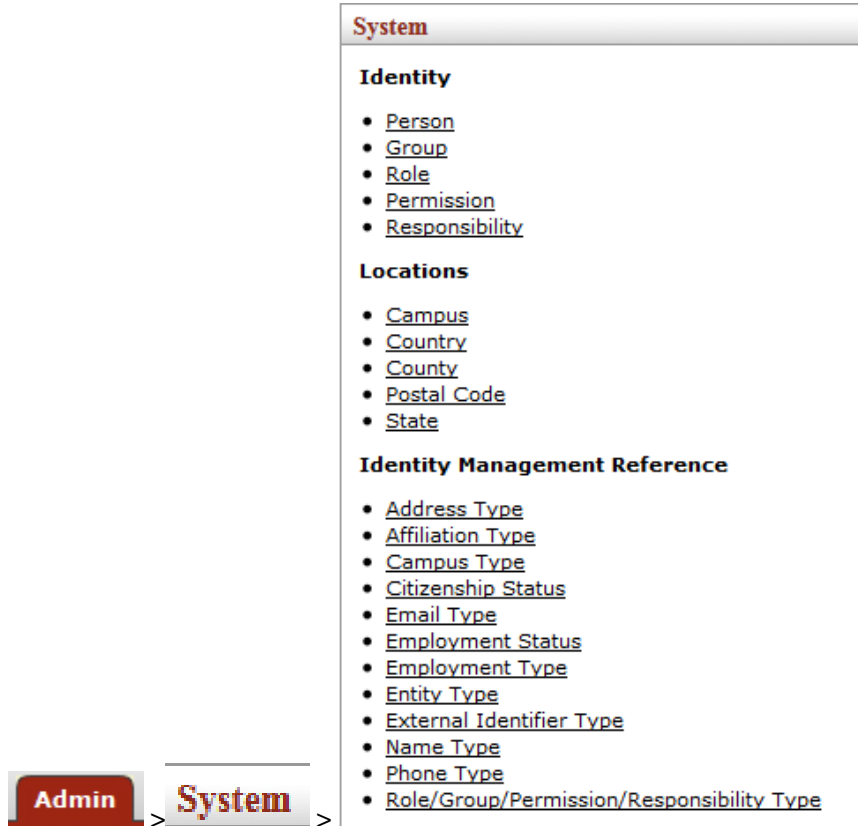


The system submenu provides access to screens that allow you to perform functions related to identity, security, locations, and reference.

## System Submenu Groups

System submenu groups

Document	Description
<a href="#">Identity</a>	Allows you to establish and maintain user data and the associated roles and permissions in the Kualiti Identity Management (KIM) system
<a href="#">Locations</a>	Enables you to define valid values for various types of location information in OLE.
<a href="#">Reference</a>	Provides a means of defining valid values for use on the KIM Person document.

# Identity

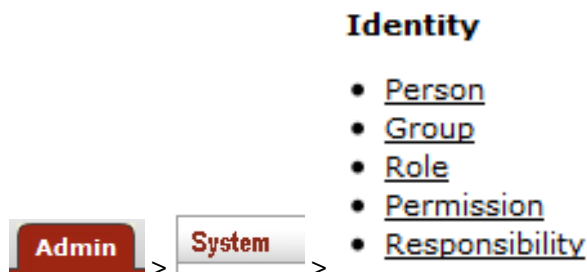

The Identity submenu group provides access to screens in order to establish and maintain user data and the associated roles and permissions in the Quali Identity Management (KIM) system. This system handles user identification, permissions, and responsibilities for multiple Quali applications, including OLE. KIM may also be used with non-Quali applications.

OLE communicates with KIM to determine each user's permissions and workflow responsibilities. These permissions and responsibilities are defined by the user's role or roles in the system. Roles can be customized to handle permissions and responsibilities in a variety of ways based on your institution's needs.

## Note

Learn more about KIM functions in the video [KIM functions \(roles, permissions, responsibilities\)](#).

## Menu Access to KIM Functions

In OLE, most KIM documents are available from the **Admin** menu tab in the **System** menu group in the **Identity** submenu group. The [Routing & Identity Management Document Type Hierarchy](#) is available in the **Configuration** menu group in the **Workflow** submenu group.

The purpose of each document in the **Identity** subgroup in the **System** menu group is explained in the following table.

## Basic KIM Concepts

This section introduces KIM permissions, responsibilities, roles, and groups as well as the Routing & Identity Management Document Type Hierarchy tool.

## KIM Permissions, Responsibilities, and Roles

Entries in KIM control user permissions to edit a document, to blanket approve transactions, and to perform many other activities in OLE.

KIM also identifies responsibilities that generate workflow action requests in OLE. When a Fiscal Officer approves a financial processing document or a Chart Manager approves a Chart of Accounts maintenance document, the user is acting on a request that has been generated by a responsibility specified in KIM.

In KIM, you do not assign permissions and responsibilities directly to individual users; instead, you associate users with roles, and you give each role an appropriate set of responsibilities and permissions. For example, the Fiscal Officer role includes permission to edit accounting lines on certain enroute documents.



This role also includes responsibilities that generate requests for the specific actions fiscal officers must take on documents. The Limited Circulation Attendant role includes permissions to view but not make changes to a patron record.

In the base OLE configuration, similar business functions are often grouped into a single role. Your institution may choose to assign permissions and responsibilities differently or even create its own roles to fit its business processes.

In KIM, each user is identified on the KIM Person document. This document identifies the person by a Principal ID and assigns that person to any number of roles. Role assignments may be made via the Person document or the Role document. Some types of roles, called 'derived roles,' automatically determine their members from data in other OLE components. For example, because Fiscal Officer is a definition of the Account in OLE, the Fiscal Officer role derives its assignees based on the data in the Account table. You do not need to assign users to derived roles such as this one.


## KIM Groups

Groups provide another important tool in KIM. Groups are an optional feature that allows you to associate persons, roles or other groups with each other for the purpose of making role assignments. For example, if you want to assign the same role to three users, you could create a group, assign the three users to it, and then assign the group to the desired role. (Alternatively, you could add the three users individually to the role. The choice of whether to use a group or assign individual users to roles is entirely yours.)

## Routing & Identity Management Document Type Hierarchy Tool

One more tool—the Routing & Identity Management Document Type Hierarchy—is unique to KIM. This tool allows you to view KIM permissions and responsibilities as they relate to specific OLE documents.

## Person



The Person document allows you to identify each user to KIM (and, by extension, to OLE). Each Person document includes data about a user's relationship with your institution as well as the roles and groups to which this person belongs.

In KIM a person is a unique combination of an 'entity ID' and a 'principal ID.' The entity ID represents a person with a unique number, and the document associates the entity ID with the user's principal ID number and principal name (often referred to as a user name or user ID). When searching for or working with users in KIM, you usually reference either the principal ID or the principal name. A single entity ID can have multiple principals associated with it, but the base OLE implementation of KIM assumes that each entity ID has only a single principal.

### Note

Note that initiation of the Person document is restricted to members of the KR-SYS Technical Administrator or OLE-SYS Manager role.

## Document Layout

The Person document includes **Overview**, **Contact**, **Privacy Preferences**, and **Membership** tabs.

Person	Doc Nbr: 3496	S
	Initiator: ole-khuntley	Cr

Document Overview ▼ hide

**Document Overview**

* Description: <input type="text"/>	Explanation: <input type="text"/>
Organization Document Number: <input type="text"/>	

Overview ▼ hide

Entity Id: 1	Principi
* Principal Name: kr	A

**Affiliations**

* Affiliation Type	* Campus Code	Default

Contact ▼ hide

**Names**

Name Code	Name Prefix	* First Name	* Last Name	Name Suffix	Default	Active

**Addresses**

Address Type	Line 1	Line 2	Line 3	City	State/Province	Postal Code	Country	Default	A

**Phone Numbers**

Phone Type	Phone Number	Extension	Country	Default	Active

**Email Addresses**

Email	Type	Default	Active

Privacy Preferences ▼ hide

Suppress Name:	No	Suppress Address:	
Suppress Personal:	No	Suppress Email:	
Suppress Phone:	No		

Membership ▼ hide

▼ hide **Groups**

Group	Namespace Code	Name	Type	Active From Date	Active To
Add: <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

▼ hide **Roles**

Role	Namespace Code	Name	Type	Active From Date	Active To
Add: <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
1	90	KR-SYS	System User	Default	

▼ hide **Delegations**

Role Member	Active From Date	Active To Date	Delegation Type Code
Add: <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Ad Hoc Recipients ▶ show

Route Log ▶ show

## Overview Tab

The **Overview** tab identifies the person as a unique combination of entity and principal ID. It also contains information about how this person is affiliated with your institution. Two types of affiliations—staff and faculty—contain additional data elements to further define a person's relationship with your institution.

The instructions below assume that you are manually completing this information. Many institutions may want to either have this data fed from an existing person database or simply override this information with existing person data.

Overview hide

Entity Id: 1

\* Principal Name: kr

Affiliations		
* Affiliation Type	* Campus Code	Default

## Overview Section

The first section in the **Overview** tab is the **Overview** section.

### Overview section Definitions

Title	Description
Entity Id	Display only. The unique ID number identifying this person in your database. An individual may have multiple principal IDs but only one entity ID. The base OLE implementation assumes that each user will have only one entity ID and one principal ID.  The system completes this entry automatically when you save or submit the document.
Principal ID	Display only. The unique ID number identifying this principal. Whereas Entity ID represents a unique person, principal represents a set of login information for that person. When selecting a person, you ordinarily reference his or her principal ID.  The system completes this entry automatically when you save or submit the document.
Principal Name	Required. Enter the user name by which this principal is to be identified.
Principal Password	Optional. Enter the password for this principal ID.
Active	Check the box to indicate that this principal ID is active. Uncheck the box to indicate that this principal ID is inactive.

Use the **Affiliations** section of the **Overview** tab to add affiliations for this principal ID. Depending on the affiliation type added, you may need to complete additional fields.

### Affiliations section definition

Title	Description
Affiliation Type	Optional. Select the type of affiliation from the list. Options include:  Affiliate: An affiliation for users in your system that are neither employees nor students. Faculty: A faculty employee. Staff: A non-faculty employee. Student: A non-employee identified as a student of your institution.  Affiliation types of Faculty and Staff require additional information (see below).
Campus Code	Required. Select the campus code associated with this affiliation.
Default	Check the box to indicate that this affiliation is this principal's default association with your institution. Each principal must have at least one default affiliation.
Actions	Click the <b>Add</b> button to add the affiliation.

If you have selected an Affiliation of 'Faculty' or 'Staff,' the system displays additional fields to collect employment information.

hide Employment Information

Employment Id	Primary	* Employee Status	* Employee Type	* Base Salary Amount	Primary Department Code	Actions
Add: <input type="text"/>	<input type="checkbox"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="Add"/>

### Employment Information fields definition

Title	Description
Employment ID	Optional. Enter the Employment ID number associated with this faculty or staff affiliation. Ordinarily this entry is the ID number identifying this principal in your HR system.
Primary	Check the box to indicate that this faculty or staff affiliation represents the principal's primary job with your institution. Each principal with a faculty or staff affiliation must have exactly one affiliation marked as 'primary'.
Employee Status	Required. Select a value to identify the current status of this faculty or staff affiliation. Options include:  Active, Deceased, On Non-Pay Leave Status, Not Yet Processed, Processing, Retired, Terminated
Employee Type	Required. Select a value to indicate the type of employment for this affiliation. Options include Non-Professional, Other, and Professional
Base Salary Amount	Required. Enter the base salary yearly amount earned for this faculty or staff affiliation.
Primary Department Code	Optional. Enter the code for the department associated with this faculty or staff affiliation. OLE-SYS User role parses this field to determine the default chart and organization for a user if it is formatted as 'Chart-Organization Code' such as BL-PSY or BA-PARK.
Actions	Click the <b>Add</b> button to add this row of employment information.

## Contact Tab

The **Contact** tab records the names, addresses, phone numbers and email addresses associated with this Person record. Any Person record can store multiple records for contact information of each type (name, address, phone number, and email address), with one value of each type identified as the default value for the Person record.

Contact
▼ hide

Names							
	Name Code	Name Prefix	* First Name	* Last Name	Name Suffix	Default	Active
Add:	Other ▼	▼	<input type="text"/>	<input type="text"/>	▼	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Addresses									
	Address Type	Line 1	Line 2	Line 3	City	State/Province	Postal Code	Country	Default
Add:	Home ▼	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	▼	<input type="text"/>	▼	<input type="checkbox"/>

Phone Numbers						
	Phone Type	Phone Number	Extension	Country	Default	Active
Add:	Home ▼	<input type="text"/>	<input type="text"/>	▼	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Email Addresses				
	Email	Type	Default	Active
Add:	<input type="text"/>	Home ▼	<input type="checkbox"/>	<input checked="" type="checkbox"/>

## Names Section

Names							
	Name Code	Name Prefix	* First Name	* Last Name	Name Suffix	Default	Active
Add:	Other ▼	▼	<input type="text"/>	<input type="text"/>	▼	<input type="checkbox"/>	<input checked="" type="checkbox"/>

### Names section definition

Title	Description
Name Code	Optional. Select the type of name to be added in this row. Options include:  Other, Preferred, Primary
Name Prefix	Optional. Select the appropriate title for the name being added in this row. Options include:

	Ms, Mrs, Mr, Dr
First Name	Optional. Enter the first name for this record.
Last Name	Optional. Enter the last name for this record.
Name Suffix	Optional. Select a suffix for this name record. Options include: Jr, Sr, Mr, Md
Default	Check this box to indicate that this Name record is to be used as the default for this person. Each Person record must have exactly one Name record identified as the default.
Active	Check the box to indicate that this Name record is active. Uncheck the box to indicate that this record should be considered inactive.
Actions	Click the <b>Add</b> button to add this Name record.

## Addresses Section

Addresses											
	Address Type	Line 1	Line 2	Line 3	City	State/Province	Postal Code	Country	Default	Active	Actions
Add:	Home ▾	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="button" value="add"/>

### Addresses section definition

Title	Description
Address Type	Optional. Select the type of address being added on this row. Options include: Home, Other, Work
Line 1-3	Optional. Use lines 1, 2 and 3 to enter the street address for this row.
City	Optional. Enter the city associated with this address.
State/Province	Optional. Select the state or province associated with this address from the list.
Postal Code	Optional. Enter the postal code associated with this address.
Country	Optional. Select the country associated with this address.
Default	Check this box to indicate this address record should be used as the default. A Person record can have no more than one default Address record.
Active	Check this box to indicate that this Address record is active. Uncheck the box to indicate that this record is inactive.
Actions	Click the <b>Add</b> button to add this Address record.

## Phone Numbers Section

Phone Numbers							
	Phone Type	Phone Number	Extension	Country	Default	Active	Actions
Add:	Home ▾	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="button" value="add"/>

### Phone Numbers section definition

Title	Description
Phone Type	Optional. Select the type of phone number being added on this row. Options include: Home Mobile Other Work
Phone Number	Optional. Enter the area code and phone number.
Extension	Optional. Enter the appropriate extension.
Country	Optional. Select the country associated with this Phone Number record.
Default	Check this box to indicate that this Phone Number record should be used as the default. A Person record can have no more than one default Phone Number record.

Active	Check this box to indicate that this Phone Number record is active. Uncheck the box to indicate that this record is inactive.
Actions	Click the <b>Add</b> button to add this Phone Number record.

## Email Addresses Section

Email Addresses				
	Email	Type	Default	
<b>Add:</b>	<input type="text"/>	Home ▾	<input type="checkbox"/>	
<b>1</b>	test@email.edu	Work ▾	<input checked="" type="checkbox"/>	

### Email Address section definition

Title	Description
Email	Optional. Enter the email address for this record.
Type	Optional. Select the type of email address being added on this row. Options include: Home, Other, Work
Default	Check this box to indicate that this Email Address record should be used as the default. A Person record can have no more than one default Email Address record.
Active	Check this box to indicate that this Email Address record is active. Uncheck the box to indicate that this record is inactive.
Actions	Click the <b>Add</b> button to add this Email Address record.

## Privacy Preferences Tab

### Note

Note that no role in the base data configuration can modify this privacy preferences information. If you wish this capability to be available via the user interface, you must assign the 'Override Entity Privacy Preferences' permission to a role.

The **Privacy Preferences** tab allows you to suppress the display of fields on the Contact Tab.

Privacy Preferences	
Suppress Name:	<input type="checkbox"/>
Suppress Personal:	<input type="checkbox"/>
Suppress Phone:	<input type="checkbox"/>
Suppress Address:	<input type="checkbox"/>
Suppress Email:	<input type="checkbox"/>

### Privacy Preferences tab definition

Title	Description
Suppress Name	Optional. Check this box to specify that the system is not to display this person's names.
Suppress Personal	Optional. Do not display this person's personal data. This selection currently performs no function in OLE.
Suppress Phone	Optional. Check this box to specify that the system is not to display this person's phone numbers.
Suppress Address	Optional. Check this box to specify that the system is not to display this person's addresses.
Suppress Email	Optional. Check this box to specify that the system is not to display this person's email addresses.

## Membership Tab


The **Membership Tab** allows you to associate a person with groups and roles and, by extension, with KIM permissions and responsibilities. *Assigning a person to a role is the most direct way to give a user KIM permissions and responsibilities.*

The screenshot shows the Membership Tab interface. At the top, there is a 'hide' button. Below it are three sections: Groups, Roles, and Delegations. Each section has an 'Add:' button and a search icon. The Groups section has columns for Group, Namespace Code, Name, Type, Active From Date, and Active To Date. The Roles section has columns for Role, Namespace Code, Name, Type, Active From Date, and Active To Date. The Delegations section has columns for Role Member, Active From Date, Active To Date, and Delegation Type.

The tab is divided into three sections, one for managing assignments to **Groups**, another for **Roles**, and a third for **Delegations**.


### Groups Section

Groups section definition

Title	Description
Group	Optional. Enter the name of the KIM group you want to assign this person to. You can also use the Group lookup  to search for and select a valid value.
Namespace Code	Display only. After you select a group to add this person to, the namespace code associated with the selected group is displayed.
Name	Display only. After you select a group to add this person to, the name of that group is displayed.
Type	Display only. After you select a group to add this person to, the type associated with the selected group is displayed.
Active From Date	Optional. If this user's assignment to this group is to be effective as of a certain date, enter that date here.
Active To Date	Optional. If this user's assignment to this group is to terminate as of a certain date, enter that date here.  <b>Note</b>  There is no way to delete a person's assignment to a group. To remove a person from a group, use this field to specify a date in the past.
Actions	Click the <b>Add</b> button to add this group assignment.

### Roles Section

Roles section definition

Title	Description
Role	Optional. Use the Name lookup  to search for and select the role you want to assign this person to.

Namespace Code	Display only. After you select a role to assign to this Person record, the system displays the namespace code associated with that role.
Name	Display only. After you select a role to assign to this Person record, the system displays the name associated with that role.
Type	Display only. After you select a role to assign to this Person record, the system displays the role type associated with the selected role here.
Active From Date	Optional. If this user's assignment to this role is to be effective as of a certain date, enter that date here.
Active To Date	Optional. If this user's assignment to this role is to terminate as of a certain date, enter that date here.  <b>Note</b>  Note that there is no way to delete a person's assignment to a role. To remove a person from a role, use this field to specify a date in the past.
Actions	Click the Add button to add this role data.


### Note

When assigning some roles, you may need to supply additional qualifying values that further define this person's assignment. For more information about role qualifiers, see [Role](#).

## Delegations Section

Delegations allow you to set a user as a primary or secondary delegate for a current member of a role. The delegate has the same permissions as the role member and is able to act on action requests generated for the role member by KIM.

### Delegations section definition

Title	Description
Role Member	Optional. Use the Role Member lookup  to search for and select the role and role member you wish to add a delegation for.
Active From Date	Optional. If this delegation is to be effective as of a certain date, enter that date here.
Active To Date	Optional. If this delegation is to terminate as of a certain date, enter that date here.  <b>Note</b>  Note that there is no way to delete a person's delegation. To remove a person from a role, use this field to specify a date in the past.
Delegation Type Code	Optional. This defines how the delegate will be able to access workflow action requests generated to the delegating role member. Options are 'Secondary' (the user must use the secondary delegate action list filter to view action requests) and 'Primary' (action requests will route directly to the delegate's action list).
Actions	Click the <b>Add</b> button to add this delegation data.

## Process Overview

### Business Rules

- A person must have at least one affiliation.
- Each faculty or staff affiliation must have at least one Employment Information record associated with it.




- If a person has any faculty or staff affiliations then one Employment Information record must be marked as 'primary'.
- Each person must have a default Name record in the Contacts section.
- Each affiliation must be associated with a campus.
- Each type of contact information can have only one record marked as the default.

## Routing

Only members of OLE-SYS Manager or KR-SYS Technical Administrator roles can initiate Person documents. In OLE base data configuration, the KIM Person document does not route for approval.

## Group



The Group document allows you to associate persons, roles or other groups with each other in order to assign the same role to all group members.

Groups have no inherent permissions or responsibilities of their own. Only by associating a group with a role do the members of that group become associated with permissions and responsibilities.

## Document Layout

The Group document includes **Document Overview**, **Overview**, **Definitions** and **Assignees** tabs.

<b>Group</b> ?	<b>Doc Nbr:</b> 3089	<b>Status:</b> INITIATED
	<b>Initiator:</b> admin	<b>Created:</b> 03:08 PM 06/14/2011

[expand all](#) [collapse all](#) \* required field

**Document Overview** ▼ hide

<b>* Description:</b> <input type="text"/>	<b>Explanation:</b> <input type="text"/>
<b>Organization Document Number:</b> <input type="text"/>	

**Overview** ▼ hide

<b>Group Id:</b> 10000	<b>Type Name:</b> Default
<b>* Group Namespace:</b> <input type="text"/>	<b>* Group Name:</b> <input type="text"/>
<b>Active?:</b> <input checked="" type="checkbox"/>	<b>Group Description:</b> <input type="text"/>

**Assignees** ▼ hide

Select a Group Namespace to determine if you have the appropriate permission to add members to this group

Add Member:						
	* Type Code	* Member Identifier	Name	Active From Dt	Active To Dt	Actions
Add:	Principal	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

Members:								
	* Type Code	* Member Identifier	Namespace	Name	Full Name	Active From Dt	Active To Dt	Actions

**Ad Hoc Recipients** ▶ show

**Route Log** ▶ show

## Overview Tab

This tab identifies the group with a unique system-assigned ID number, a namespace and a name. Each group also has a type that specifies any qualifiers that this group might require.

Overview
▼ hide

<b>Group Id:</b> 10000	<b>Type Name:</b> Default
<b>* Group Namespace:</b> <input type="text"/>	<b>* Group Name:</b> <input type="text"/>
<b>Active?:</b> <input checked="" type="checkbox"/>	<b>Group Description:</b> <input type="text"/>

### Overview tab definition

Title	Description
Group ID	Display only. The unique system-assigned ID number that identifies this group. The system completes this field when you submit the document.
Type Name	Required. The type of definitions that will be associated with this group. Some group types, such as the Default Type, require no definitions to be collected.  <b>Note</b>  When creating a new group, you must select the Type before the system can generate the document. See below.
Group Namespace	Required. An indicator that associates the group with a particular application and module.
Group Name	Required. The common descriptive name by which this group is known.
Active	Check this box to indicate that this Group is active and is a valid choice for assigning to roles. Uncheck the box to indicate that this group is inactive (no longer valid when making role assignments).
Group Description	Additional description field for the group.

## Type Name

When you click the lookup button , the system displays the KIM Type Lookup screen. You must search for and select an existing Type in order for the system to generate a new Group document.

**Kim Type Lookup**

<b>Namespace Code:</b>	<input type="text"/>
<b>Type Name:</b>	<input type="text"/>
<b>Type Identifier:</b>	<input type="text"/>
<b>Active Indicator:</b>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both

This lookup is used whenever you create a new group or role. The search definitions are explained below.

### KIM Type Lookup definition

Title	Description
Namespace Code	Optional. Select the code identifying the application and module this KIM type pertains to.
Type Name	Optional. Enter the name identifying this KIM type.
Type Identifier	Optional. Enter the unique system-assigned identifying number for this KIM type.
Active Indicator	Required (defaults to 'Yes'). Change the default selection to view KIM types that are inactive or are both active and inactive.

The display of search results includes the same fields as the Lookup screen. To select the type you want to use for your new group, click the return value link for it.

**Kim Type Lookup**

---

Namespace Code:

Type Name:

Type Identifier:

Active Indicator:  Yes  No  Both

2 items found. Please refine your search criteria to narrow down your search.  
2 items retrieved, displaying all items.

Return Value	Namespace Code	Type Name	Type Identifier	
<a href="#">return value</a>	KUALI	Default	1	Yes
<a href="#">return value</a>	KFS-COA	Organization Group	68	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

## Definitions Tab

This tab contains any definitions specific to this group's type. For example, if a group has a type of Chart and Organization, this tab will record the Chart and Organization values that are specific to this group. In the example below a Chart Code and Organization Code are required for establishing groups of this type.

**Attributes**

\* Chart Code

\* Organizat

## Assignees Tab

This tab contains the members who belong to this group. It can also be used to add new members or edit the values associated with existing members.

**Assignees**

Select a Group Namespace to determine if you have the appropriate permission to add members to this group


**Add Member:**

Add:	* Type Code	* Member Identifier	Name	Active From Dt	Active T
	Principal	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

**Members:**

* Type Code	* Member Identifier	Namespace	Name	Full Name	Active From Dt	Acti
-------------	---------------------	-----------	------	-----------	----------------	------

**Assignees tab definition**

Title	Description
Type Code	Required. Select the type of member you are adding to this group. Group members can be principals (as defined on the Person document), roles or other groups.
Member Identifier	Required. Enter the ID that identifies the member you are adding or use the lookup  to search for and select a valid Member ID. The lookup directs you to the <b>Principal, Group</b> or <b>Role</b> lookup based on your Member Type Code selection.
Name	Display only. Displays the name of the member you've selected.
Active From Dt	Optional. To specify the earliest date on which this member is to be considered a valid member of this group, enter a From Date.
Active To Dt	Optional. To specify a date on which this member is no longer to be considered a valid member of this group, enter a To Date.  <b>Note</b>  Note that you cannot delete or inactivate group members. To remove a member from a group enter an Active To Date.
Actions	Click the <b>Add</b> button to add this member to the group.

## Role



The Role document allows you to create a new KIM role and edit an existing role. Each role aggregates a specific set of permissions and responsibilities and allows you to assign members to the role. OLE contains many existing roles that your institution may want to use as is, but you may also change existing roles and add new ones by using the Role document.

The purpose of each role is defined by its associated permissions and responsibilities. Roles are classified by types that generally indicate the type of permissions and responsibilities with which they can be associated.

### Note

The process of creating a new type requires technical assistance. Consequently, KIM does not provide an interface for creating role types.

## Document Layout

The Role document includes **Document Overview**, **Overview**, **Permissions**, **Responsibilities**, and **Assignees** tabs.

<b>Role</b> <span style="float:right;">?</span>	<b>Doc Nbr:</b> 3
	<b>Initiator:</b> a

Document Overview
▼ hide

<b>* Description:</b> <input type="text"/>	<b>Explanation:</b> <input type="text"/>
<b>Org. Doc. #:</b> <input type="text"/>	

Overview
▼ hide

<b>Role:</b> 10000	<b>Type Name:</b> Default
<b>Namespace:</b> <input type="text"/>	<b>Role Name:</b> <input type="text"/>
<b>Active?:</b> <input checked="" type="checkbox"/>	<b>Role Description:</b> <input type="text"/>

Permissions
▼ hide

**Add Permission ID:**  🔍

* Permission Namespace	Permission Identifier	Permission Name	Permission Detail Values	Action

Responsibilities
▼ hide

**Add Responsibility ID:**  🔍

Responsibility Namespace	Responsibility Identifier	Responsibility Name	Responsibility Detail Values	Action

Assignees
▼ hide

Add:	Type Code	Member Identifier	Namespace Cd	Name	Active From Dt	Active To Dt
<input type="button" value="Add"/>	Principal ▼	<input type="text"/> 🔍			<input type="text"/> 📅	<input type="text"/> 📅

Delegations
▼ hide

Add:	Role Member	Member Type Code	Member Identifier	Member Namespace Code	Member Name	Active From Date	Active To Date
<input type="button" value="Add"/>	<input type="text"/> 🔍	Principal ▼	<input type="text"/> 🔍			<input type="text"/> 📅	<input type="text"/> 📅

Ad Hoc Recipients
▶ show

Route Log
▶ show

## Overview Tab

This tab identifies the role with a unique system-assigned ID number, a namespace and a name. Each role also has a type which tends to match the types of permissions and responsibilities associated with it.

Overview
▼ hide

<b>Role:</b> 10000	<b>Type Name:</b> Default
<b>Namespace:</b> <input type="text"/>	<b>Role Name:</b> <input type="text"/>
<b>Active?:</b> <input checked="" type="checkbox"/>	<b>Role Description:</b> <input type="text"/>

## Overview tab definition

Title	Description
Role	Display only. The unique, system-assigned ID number that identifies this role.
Type Name	Display only. Because the role type normally reflects the type of qualifiers this role will need to collect when members are added, this name usually identifies the general types of permissions and responsibilities associated with it.  <p><b>Note</b></p> <p>When creating a new role, you must select its type before the system will generate the document. See <a href="#">Creating New Roles</a>.</p>
Role Namespace	Required. An indicator that associates the role with a particular application and module.
Role Name	Required. The common descriptive name by which this role is known.
Active	Check this box to indicate that this role is active and is, therefore, to be included by KIM when evaluating permissions and responsibilities. Uncheck the box to indicate that this role is inactive.

## Creating New Roles

When you click the **Create New** button, the system displays the KIM Type Lookup. You must search for and select an existing Type in order for the system to generate a new Role document.

### Note

Note that while the KIM Type Lookup is used when creating new groups and roles, not all KIM types are valid for both. When using this Lookup, you may receive different results depending on the KIM types that are valid for the entity you are working with.

## Kim Type Lookup

<b>Namespace Code:</b>	<input type="text"/>
<b>Type Name:</b>	<input type="text"/>
<b>Type Identifier:</b>	<input type="text"/>
<b>Active Indicator:</b>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/>	

## Permissions Tab

This tab identifies the permissions associated with this role. Permissions authorize specific actions in the system with which they are associated. A role can have any number of permissions (including no permissions) associated with it.

Permissions ▼ hide

Add Permission ID:

	* Permission Namespace	Permission Identifier	Permission Name	Permission Detail Values
1	KFS-FP	193	Modify Accounting Lines	Property Name : sourceAccountingLines.amount, Document Type Name : DV, Node Name : Tax

**Permissions tab definition**

Title	Description
Add Permission ID	To add a permission to this role, enter the appropriate permission ID or search for and select a value using the <b>Permission</b> lookup
Add	Click the <b>Add</b> button to add the selected permission to this Role document.

After you add a permission to the document, the system displays additional information about the permission.

**Note**

Permissions cannot be edited via the Role document. Use the Permission document to perform this function.

Permissions ▼ hide

Add Permission ID:

	* Permission Namespace	Permission Identifier	Permission Name	Permission Detail Values
1	KFS-FP	193	Modify Accounting Lines	Property Name : sourceAccountingLines.amount, Document Type Name : DV, Ro Node Name : Tax

**Permissions tab definition, continued**

Title	Description
Permission Namespace	Display only. The Namespace identifies the application and module associated with this permission.
Permission Identifier	Display only. The unique system-assigned ID number for this permission.
Permission Name	Display only. The descriptive name of this permission. This often identifies, in general terms, what the permission authorizes.
Permission Detail Values	Display only. The document types, tabs and/or fields this permission authorizes. Not all permissions have detail values.
Active Indicator	Display only. Indicator showing whether this permission is active within the system or not.
Actions	Click the <b>Delete</b> button to remove this permission from the role.

**Note**


You may delete a permission only if it has not yet been saved to the database (i.e., you added it to this role but have not yet submitted the document).

## Responsibilities Tab

This tab identifies the responsibilities associated with this role. Responsibilities define the workflow actions that will be requested of the role. A role can have any number of responsibilities (including none) associated with it.

The screenshot shows a web interface titled 'Responsibilities' with a 'hide' button. Below the title is a search field labeled 'Add Responsibility ID:' with a magnifying glass icon. Below the search field is an 'add' button. At the bottom, there is a table with four columns: 'Responsibility Namespace', 'Responsibility Identifier', 'Responsibility Name', and 'Responsibility Detail Values'.

### Responsibilities tab definition

Title	Description
Add Responsibility ID	To add a responsibility to this role enter the responsibility ID or search for and select a value using the <b>Responsibility</b> lookup  .
Add	Click the <b>Add</b> button to add the selected responsibility to this Role document.

After you add a responsibility to the document, the system displays additional information about this responsibility.

### Note

Responsibilities cannot generally be edited via the Role document, but some responsibilities have associated definitions that you must define at the role level. For information about editing responsibilities, see [Responsibility](#).

The screenshot shows the same 'Responsibilities' interface as above, but now with a table containing one row of data. The table has four columns: 'Responsibility Namespace', 'Responsibility Identifier', 'Responsibility Name', and 'Responsibility Detail Values'. The first row contains the values: '1', 'KFS-SYS', '1', 'Review', and 'OrganizationHierarchy, KFS, true, false'.

### Responsibilities tab definition, continued

Title	Description
Responsibility Namespace	Display only. The Namespace identifies the application and module associated with this responsibility.
Responsibility Identifier	Display only. The unique system-assigned ID number identifying this responsibility.
Responsibility Name	Display only. The descriptive name of this responsibility. For most Responsibilities the name is 'Review'.
Responsibility Detail Values	Display only. This identifies more specific information about the responsibility. Responsibility Detail Values are formatted in a standard way with the following definitions delimited by commas:  Route Node: The workflow route level at which this responsibility is invoked.



	<p>Document Type: The document type for which this responsibility generates workflow requests.</p> <p>Action Details at Role Member Level: A True or False indicator that defines where the details of this workflow action request are defined. If the value is 'True' then action details will be collected when Members are assigned to the role. If the value is 'False' then the action details must be collected when this responsibility is assigned to a role (see <a href="#">Assigning Action Detail Values</a> elsewhere in this section.)</p> <p>Required: Indicates if the routing represented by this responsibility should be required. If this is set to True and the responsibility fails to generate an action request (perhaps because no one is assigned to the associated Role) then the document will go into Exception status. If this routing is optional this value will be False and the document will simply skip this responsibility if no requests are generated.</p>
Active Indicator	Display only. Indicator showing whether this responsibility is active within the system or not.
Actions	<p>Click the <b>Delete</b> button to remove this responsibility from this role.</p> <p><b>Note</b></p> <p>You can delete a responsibility only if it has not yet been saved to the database (i.e., you have added it to this role but have not yet submitted the document).</p>

### Assigning Action Detail Values

When adding a responsibility with an **Action Detail Values at Role Member Level** value of 'False,' you must complete additional fields in a Responsibility Action sub-section. The system displays this section immediately beneath the responsibility you've just added.

The fields in this sub-section define the type of action requests generated for and the general workflow behavior associated with this responsibility. Entries in these fields cause the system to generate the same type of action requests for all members of this role and handle actions by all members in the same way.

Responsibility Action				
Name	* Action Type Code	Priority Number	* Action Policy Code	
All	<input type="text"/>	<input type="text"/>	<input type="text"/>	

### Responsibility Action subsection definition


Title	Description
Name	Display only. The namespace and name of the responsibility associated with these action details.
Action Type Code	Required. The type of action request that the system is to generate for this responsibility. Options include Approve, FYI and Acknowledge.
Priority Number	Optional. If multiple requests are generated at the route node specified on this responsibility, this value determines in the order in which the system will generate these requests. The system processes requests with lower priority numbers before processing requests with higher numbers. Requests with no number are treated as a priority of 1.
Action Policy Code	<p>Required. This value determines what happens if multiple members of this role receive the same action request and one of them takes the action. This currently only applies in situations where a single action request is generated to multiple role members (i.e. the action details exist at the role level) or a role is assigned to another role and these nested role members receive an action request. For example, if a role with a responsibility with action details defined at the role level has three members assigned, all of these members receive the action request defined here; this code determines what the system does when one of them takes action on the document.</p> <p>A value of FIRST indicates that the first role member to take action on the document will automatically clear all the requests for this responsibility that may be in other role member's action lists.</p>

	A value of ALL indicates that each role member must take individual action to clear his or her requests.
Force Action	Check the box to indicate that each user must take this action for this request even if the user has already previously taken action on this document. Leaving the box unchecked allows a request to be immediately fulfilled if the role member has previously taken action on this specific document.

## Assignees Tab

This tab contains all members who belong to this role. You may also use the tab to add new members and edit the values associated with existing members.

### Assignees tab definition

Title	Description
Type Code	Required. Role members can be principals (as defined on the Person document), groups or other roles. Select the type of member you want to add to this Role.
Member Identifier	Required. Enter the ID of the member you want to add or use the lookup  to search for and select a valid value. The lookup directs you to the <b>Principal, Group or Role</b> lookup based on your Member Type Code selection.
Namespace Cd	Display only. Identifies the namespace code associated with this role member. Note that only groups and roles will display a namespace code.
Name	Display only. Identifies the name of the member being assigned to this role.
Active From Date	Optional. Allows you to qualify this member's association with this role by date. Entering a from date will define the earliest date on which this member is a valid member of this role.
Active To Date	Optional. Allows you to deactivate a member's association with a role on a specific date. The date you enter defines the date the user is no longer a member of this role.  <b>Note</b>  You cannot delete or inactivate role members. To remove a member from a role, specify an active to date.
Actions	Click the <b>Add</b> button to add this member to the role.

### Note

Additional fields may be required, such as Chart Code or Organization Code, depending on the role type selected.

### Note

Note that when assigning roles to other roles (nesting roles), qualifying values are not required. Some roles in OLE base data contain special logic to derive the required qualifiers from the nested role itself without qualifiers being specified. You may always specify qualifying values for a nested role and should do so unless you know the role being assigned contains logic to derive the qualifiers from the nested role. Roles without the proper qualifiers can cause problems throughout



your OLE instance. Please consult with a OLE technical resource if you are unsure of whether or not to provide qualifying values when assigning a role to another role.

## Delegations Tab

This tab identifies delegates associated with the role. Delegates are users that a member of this role has authorized to have the same permissions and take the same actions as the member is authorized to take.

The Assignees Tab dealing with Delegates is slightly different as detailed in the following table. Note that if the members of a role require qualifying values, the delegation requires these values as well. In most cases, delegates must have the same qualifiers as the role member they are associated with.


### Delegations tab definition

Title	Description
Role Member	Required. Use the lookup  to search for and return the member of this role you wish to create a delegate for.
Member Type Code	Required. Delegates may be principals (as defined on the Person document), groups or other roles. Select the type of delegate you want to add to this role.
Member Identifier	Required. Enter the ID that identifies the delegate you want to add or use the lookup  to search for and select a valid value. Note that the lookup will direct you to the <b>Principal, Group or Role</b> lookup based on your Member Type Code selection.
Member Namespace Code	Display only. Identifies the namespace associated with the selected delegate. Note that only delegations to groups or roles will display a member namespace code.
Member Name	Display only. Shows the name of the selected delegate.
Active From Date	Optional. If you want you can qualify this delegate's association with this role by date. Entering a from date will define the earliest date on which this delegate is a valid delegate for this role.
Active To Date	Optional. Allows you to deactivate a delegate's association with a role on a specific date. The date you enter defines the date on which the user is no longer a delegate for this role.  <b>Note</b>  You cannot delete or deactivate delegates. To remove a delegate from a role, enter an active to date.
Delegation Type Code	Required. Select 'Secondary' or 'Primary'. Note that this selection only applies to responsibilities associated with the role and indicates if the delegate will receive documents directly in their action list (Primary) or may choose to view documents in their action list using the secondary delegate list (Secondary).
Actions	Click the <b>Add</b> button to add this delegate to the role.

### Note

Additional fields may be required depending on the role type selected.

# Permission






The Permission document allows you to create new permissions or edit existing ones. The Permission Lookup allows you to search for and view existing permissions. You can view summarized information about the permission detail values as well as the roles that are currently associated with this permission.

Only members of OLE-SYS Technical Administrator or OLE-SYS Manager role can create or modify Permission documents. These documents do not route for approval.

## Note

Extreme caution should be exercised when modifying existing permissions or adding new ones. Even small changes can have application-wide consequences. Changes should be made only after sufficient testing with your local configuration.

### Permission Lookup

Template Namespace:	<input type="text"/>
Template Name:	<input type="text"/>
Permission Namespace:	<input type="text"/>
Permission Name:	<input type="text"/>
Role Namespace:	<input type="text"/>
Role Name:	<input type="text"/> 
Principal Name:	<input type="text"/> 
Group Namespace:	<input type="text"/>
Group Name:	<input type="text"/> 
Attribute Value:	<input type="text"/>
Template Id:	<input type="text"/>
Active Indicator:	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

### Permission Lookup search criteria

Title	Description
Template Namespace	Optional. To search for a permission based on its template namespace (that is, the name of the application and module to which its template belongs), select the appropriate namespace.
Template Name	Optional. To search for a permission based on the name of the template it is based on, enter the appropriate template name.
Permission Namespace	Optional. To search for a permission based on its namespace, select the appropriate permission namespace.
Permission Name	Optional. To search for a permission by name, enter its name.
Role Namespace	To search for a permission based on the namespace of the role to which it is assigned, enter the appropriate role namespace.
Role Name	Optional. To search for a permission based on the role to which it is assigned, enter the appropriate role name.
Principal Name	Optional. To search for a permission based on the principals that currently have this permission through their association with a role, enter an appropriate principal name.

Group Namespace	Optional. To search for a permission based on the namespace of groups that have this permission through the group's association with a role, enter an appropriate group namespace.
Group Name	Optional. To search for a permission based on the name of a group that has this permission through its association with a role, enter an appropriate group name.
Attribute Value	Optional. A specific permission detail value associated with a permission
Template ID	Numerical value of the template namespace

31 items retrieved, displaying all items.

Actions	Template Namespace	Template Name	Permission Namespace	Permission Name	Permission Description	Permission Detail Values
<a href="#">edit</a> <a href="#">copy</a>	<a href="#">KFS-SYS</a>	<a href="#">Claim Electronic Payment</a>	<a href="#">KFS-SYS</a>	<a href="#">Claim Electronic Payment</a>	Allows access to the Electronic Fund Transfer interface for the claimi...	
<a href="#">edit</a> <a href="#">copy</a>	<a href="#">KFS-SYS</a>	<a href="#">Error Correct Document</a>	<a href="#">KFS-SYS</a>	<a href="#">Error Correct Document</a>	Allows access to the Error Correction button on KFS Transactional docu...	Document Type Name : KFST

The Permission results display contains the fields described in the table below.

### Permission Lookup results fields

Title	Description
Actions	Actions allow selection of edit or copy for each permission displayed.
Template Namespace	The code identifying the application and module the template pertains to. Because templates tend to be general categories, they are often associated with system-level namespaces.
Template Name	The template the permission is based on. A template usually defines, in a broad sense, what the permission controls. Similar types of permissions share the same template.
Permission Namespace	The code designating the application and module this permission is associated with.
Permission Name	The descriptive name for this permission. In most cases this will match the Template Name.
Permission Description	Display only. Detailed information that describes the permission and its purpose.
Permission Detail Values	<p>Display only. Detailed information that, in combination with the permission name, defines the permission's function.</p> <p>For example, if the permission name is 'Initiate Document,' the Permission Detail Values field indicates the specific type of document the initiate permission pertains to.</p> <p>Permission detail values can include many different types of data. Some common types are defined below.</p> <p>documentTypeName: The name of the document type associated with this permission.</p> <p>routeNodeName: The point in a document's workflow routing at which this permission becomes relevant.</p> <p>routeStatusCode: The routing status that a document must be in for this permission to apply.</p> <p>propertyName: Often, a field or document element that the permission pertains to.</p>
Granted to Roles	Lists the namespace and name of roles that have this permission. Click on the linked name to view the Role inquiry.

To view an Inquiry screen for a permission, select the Permission Name of the appropriate row in the search results. The Inquiry screen contains the same information as the Search Results in a slightly different format.

**Permission Inquiry**

Permission Attributes hide

<b>Template Namespace:</b>	<a href="#">KFS-SYS - Financial System</a>
<b>Template Name:</b>	<a href="#">Claim Electronic Payment</a>
<b>Permission Namespace:</b>	<a href="#">KFS-SYS - Financial System</a>
<b>Permission Name:</b>	<a href="#">Claim Electronic Payment</a>
<b>Permission Description:</b>	Allows access to the Electronic Fund Transfer inter funds.

Permission Detail Values hide

Permission Assigned Roles hide

hide **Assigned Roles(KFS-SYS - Financial System-Treasury Manager-Default)**

<b>Namespace:</b>	<a href="#">KFS-SYS - Financial System</a>	<b>Role Name:</b>	<a href="#">Treas</a>
<b>Role Type Name:</b>	<a href="#">Default</a>		

close

## Document Layout

The Permission document includes **Document Overview**, **Permission Info**, and **Permission Details** tabs.

<b>Permission</b>		<b>Doc Nbr:</b> 3
		<b>Initiator:</b> a

<b>Document Overview</b>	
<b>Document Overview</b>	
<b>* Description:</b> <input type="text"/>	<b>Explanation:</b> <input type="text"/>
<b>Org. Doc. #:</b> <input type="text"/>	

<b>Permission Info</b>	
<b>New</b>	
<b>Permission Identifier:</b>	10001
<b>* Template Id:</b>	<input type="text"/>
<b>* Permission Namespace:</b>	<input type="text"/>
<b>* Permission Name:</b>	<input type="text"/>
<b>Permission Description:</b>	<input type="text"/>
<b>* Active Indicator:</b>	<input checked="" type="checkbox"/>

<b>Permission Details</b>	
<b>New</b>	
<b>Permission Details:</b>	<input type="text"/>

<b>Notes and Attachments (0)</b>	
<b>Ad Hoc Recipients</b>	
<b>Route Log</b>	

## Permission Info Tab

This tab identifies the permissions with a unique system-assigned ID number, a template, namespace, name and description.

**Permission Info**
▼ hide

**New**

<b>Permission Identifier:</b>	10005
<b>* Template Id:</b>	<input type="text"/>
<b>* Permission Namespace:</b>	<input style="width: 90%;" type="text"/> ▼
<b>* Permission Name:</b>	<input type="text"/>
<b>Permission Description:</b>	<div style="border: 1px solid #ccc; height: 60px; width: 100%;"></div>
<b>* Active Indicator:</b>	<input checked="" type="checkbox"/>

**Permission Info tab definition**

Title	Description
Permission Identifier	Display only. The unique, system-assigned ID number that identifies this permission.
Template ID	Required. Select the Template this permission is associated with. Templates identify broad permission types.
Permission Namespace	Required. An indicator that associates the permission with a particular application and module.
Permission Name	Required. A text name identifying this permission.
Permission Description	Optional. Enter a text description of what this permission does.
Active Indicator	Required (defaults to 'Yes'). Change the default selection if you wish this permission to be inactive. Inactive permissions will be disregarded by KIM when doing permission checks.

**Permission Details Tab**

This tab identifies the permission values that KIM needs to make this permission function. These values vary greatly depending on the type of permission being created. It is highly recommended that users view similar permissions (those with the same Template ID) and discuss Permission Details with technical resources to ensure values are entered correctly.

**Permission Details**
▼ hide

**New**

**Permission Details:**

**Permission Details tab definition**

Title	Description




Permission Details

Optional (though most permissions require some details to be functional). Enter the permission details specific to this permission. Details should be entered as the name of the property followed by an '=' followed by the value of the property. When entering multiple details they should be separated by a hard return in the text box, such as:

```
componentName=IdentityManagementPersonDocument
```

## Responsibility



The Responsibility document allows you to create new responsibilities or edit existing ones. The Responsibility Lookup allows you to search for and view existing responsibilities. You can view summarized information about the responsibility detail values as well as the roles with which the responsibility is currently associated.

Only members of OLE-SYS Technical Administrator or OLE-SYS Manager role can create or modify a Responsibility document and it does not route for approval. Information about the Responsibility document follows detailed information about the Responsibility Lookup below.

### Note

Caution should be exercised when modifying existing responsibilities or adding new ones. Relatively minor changes can result in disruptions to the workflow of documents if made in error. Changes should be made only after sufficient testing with your local configuration.

**Responsibility Lookup**

Template Namespace:	<input type="text"/>
Template Name:	<input type="text"/>
Responsibility Namespace:	<input type="text"/>
Responsibility Name:	<input type="text"/>
Role Namespace:	<input type="text"/>
Role Name:	<input type="text"/>
Principal Name:	<input type="text"/>
Group Namespace:	<input type="text"/>
Group Name:	<input type="text"/>
Attribute Value:	<input type="text"/>

### Responsibility Lookup search criteria

Title	Description
Template Namespace	Optional. To search for a responsibility based on its template namespace (that is, the name of the application and module to which its responsibility template belongs), select the appropriate namespace.

Template Name	Optional. To search for a responsibility based on the name of the template it is based on, enter the appropriate template name.
Responsibility Namespace	Optional. To search for a responsibility based on its namespace, select the appropriate responsibility namespace.
Responsibility Name	Optional. To search for a responsibility by name, enter its name.
Role Namespace	To search for a responsibility based on the namespace of the role to which it is assigned, enter the appropriate role namespace.
Role Name	Optional. To search for a responsibility based on the role to which it is assigned, enter the appropriate role name.
Principal Name	Optional. To search for a responsibility based on the principals that currently have this responsibility through their association with a role, enter an appropriate principal name.
Group Namespace	Optional. To search for a responsibility based on the namespace of groups that have this responsibility through the group's association with a role, enter an appropriate group namespace.
Group Name	Optional. To search for a responsibility based on the name of a group that has this responsibility through its association with a role, enter an appropriate group name.
Attribute Value	Optional. A specific responsibility detail value associated with a responsibility.

8 items retrieved, displaying all items.

Actions	Template Namespace	Template Name	Responsibility Namespace	Responsibility Name	Responsibility Detail Values
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Document Type Name : PCDO, Route Node Name : Account, Required : true,...
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Route Node Name : CashManagement, Document Type Name Action Deta...
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Route Node Name : Campus, Document Type Name : DV, Action Details At R...
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Route Node Name : Purchasing, Document Type Name : DV, Action Details ...
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Route Node Name : Tax, Document Type Name : DV, Action D At Role...
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Route Node Name : Travel, Document Type Name : DV, Action Details At R...
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Route Node Name : PaymentMethod, Document Type Name : Action Detai...
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Document Type Name : PCDO, Route Node Name : AccountFu Required...

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

The Responsibility results display contains the fields described in the table below.

### Responsibility Lookup results fields

Title	Description
Actions	Actions allow selection of edit or copy for each responsibility displayed.
Template Namespace	The code identifying the application and module the template pertains to. Because responsibilities pertain to workflow, most responsibility templates are associated with the KR-WKFLW (Kuali Rice-Workflow) namespace.
Template Name	The template the responsibility is based on. A template usually defines, in a broad sense, what the responsibility is. Since responsibilities normally are normally associated with action requests for user review, most responsibilities have a template name of 'Review'.
Responsibility Namespace	The code designating the application and module this responsibility is associated with. This code usually corresponds to the namespace of the document type for which the responsibility generates action requests.
Responsibility Name	The name of this responsibility. In most cases the responsibility name will be the same as the associated template name ('Review').  Like permission names, responsibility names are not unique. Most OLE responsibilities have a name of 'Review'.

Responsibility Detail Values

Display only. Detailed information that defines what document this responsibility generates action requests for, when the requests are generated and how they are handled by workflow.

Unlike permissions, which sometimes have different detail values, responsibility detail values generally contain the elements defined below.

routeNodeName: The point in a document's workflow routing at which this responsibility generates requests.

documentTypeName: The name of the document type for which this responsibility generates action requests. This value may also be a parent document type, which indicates that this responsibility applies to all child documents that contain the appropriate route node.

actionDetailsAtRoleMemberLevel: A True or False indicator that defines where the system collects details of this workflow action request. If the value is 'True,' the system collects action details when members are assigned to the role. If the value is 'False,' the system collects action details when this responsibility is assigned to a role.

required: A True or False value that indicates whether the system is required to generate an action request for this document type. If the value is 'True' and the document generates no requests associated with this responsibility, then the document will go into exception status. If the value is 'False' and the responsibility generates no action requests, then the document continues to route as normal.

Granted to Roles

Lists the namespace and name of roles that have this responsibility. Click on the linked name to view the Role Inquiry.

To view an Inquiry screen for a responsibility, select the **Responsibility Name** of the appropriate row in the search results. The Inquiry contains the same information displayed in the search results in a slightly different format.

**Responsibility Inquiry**

<b>Responsibility Attributes</b> <span>hide</span>		
<b>Template Namespace:</b>	<a href="#">KR-WKFLW - Workflow</a>	
<b>Template Name:</b>	<a href="#">Review</a>	
<b>Responsibility Namespace:</b>	<a href="#">OLE-PURAP - Purchasing/Accounts Payable</a>	
<b>Responsibility Name:</b>	<a href="#">Review REQS Initiator</a>	
<b>Responsibility Detail Values</b> <span>hide</span>		
<span>hide</span> <b>Detail Values ( documentTypeName - OLE_REQS )</b>		
<b>Attribute Name:</b>	documentTypeName	<b>Attribute Value:</b> OLE_REQS
<span>hide</span> <b>Detail Values ( routeNodeName - Initiator )</b>		
<b>Attribute Name:</b>	routeNodeName	<b>Attribute Value:</b> Initiator
<span>hide</span> <b>Detail Values ( required - FALSE )</b>		
<b>Attribute Name:</b>	required	<b>Attribute Value:</b> FALSE
<span>hide</span> <b>Detail Values ( actionDetailsAtRoleMemberLevel - FALSE )</b>		
<b>Attribute Name:</b>	actionDetailsAtRoleMemberLevel	<b>Attribute Value:</b> FALSE
<b>Responsibility Assigned Roles</b> <span>hide</span>		
<span>hide</span> <b>Assigned Roles ( KR-WKFLW - Workflow - Initiator - Derived Role: Route Log )</b>		
<b>Namespace:</b>	<a href="#">KR-WKFLW - Workflow</a>	<b>Role Name:</b> <a href="#">Initiator</a>
		<b>Role Type Name:</b>

close

## Document Layout

The Responsibility document includes **Document Overview**, **Responsibility Info**, and **Responsibility Details** tabs.

<b>Review Responsibility</b>		Doc Nbr:
		Initiator:

<b>Document Overview</b>	
<b>Document Overview</b>	
* <b>Description:</b> <input type="text"/>	<b>Explanation:</b> <input type="text"/>
<b>Org. Doc. #:</b> <input type="text"/>	

<b>Responsibility Info</b>	
<b>New</b>	
<b>Responsibility Identifier:</b>	10001
* <b>Responsibility Namespace:</b>	<input type="text"/>
* <b>Responsibility Name:</b>	Review
<b>Responsibility Description:</b>	<input type="text"/>
* <b>Active Indicator:</b>	<input checked="" type="checkbox"/>

<b>Responsibility Details</b>	
<b>New</b>	
* <b>Document Type Name:</b>	<input type="text"/>
* <b>Route Node Name:</b>	<input type="text"/>
* <b>Action Details At Role Member Level:</b>	<input type="checkbox"/>
* <b>Required:</b>	<input type="checkbox"/>
<b>Qualifier Resolver Provided Identifier:</b>	<input type="text"/>

<b>Notes and Attachments (0)</b>	
<b>Ad Hoc Recipients</b>	
<b>Route Log</b>	

## Responsibility Info Tab

This tab identifies the responsibility with a unique system-assigned ID number, a namespace, name and description.

<b>Responsibility Info</b>	
<b>New</b>	
<b>Responsibility Identifier:</b>	10000
* <b>Responsibility Namespace:</b>	<input type="text"/>
* <b>Responsibility Name:</b>	Review
<b>Responsibility Description:</b>	<input type="text"/>
* <b>Active Indicator:</b>	<input checked="" type="checkbox"/>

### Responsibility Info tab definition

Title	Description
Responsibility Identifier	Display only. The unique, system-assigned ID number that identifies this responsibility.
Responsibility Namespace	Required. An indicator that associates the responsibility with a particular application and module.
Responsibility Name	Required (defaults to 'Review'). A text name identifying this responsibility. Note that this is the only valid value for this document. You cannot use the Responsibility document to establish or modify Responsibilities with the name 'Resolve Exception' -these require a technical resource to modify.
Responsibility Description	Optional. Enter a text description of what this responsibility does.
Active Indicator	Required (defaults to 'Yes'). Change the default selection if you wish this responsibility to be inactive. Inactive responsibilities will be disregarded by Workflow.

### Responsibility Details Tab

This tab identifies the document type and route node associated with this responsibility. It also defines other responsibility information such as whether or not the action details reside at the role member level.

**Responsibility Details** ▼ hide

---


**New**

<b>* Document Type Name:</b>	<input type="text"/>
<b>* Route Node Name:</b>	<input type="text"/>
<b>* Action Details At Role Member Level:</b>	<input type="checkbox"/>
<b>* Required:</b>	<input type="checkbox"/>
<b>Qualifier Resolver Provided Identifier:</b>	<input type="text"/>

### Responsibility Details tab definition

Title	Description
Document Type Name	Required. Enter the name of the document type this responsibility is associated with or use the <b>Document Type Lookup</b> to search for and select a value.
Route Node Name	Required. The name of the route node at which this responsibility should be invoked.
Action Details at Role Member Level	Required (defaults to False). Check this box if you want role members associated with this responsibility to be able to define the type of workflow action they will need to take in order to fulfill the action request it generates.
Required	Required (defaults to False). Check this box if you wish documents of this type to go into Exception status if this responsibility does not generate at least one action request.
Qualifier Resolver Provided Identifier	Optional. In most cases this field should be blank. It can be used as an additional identifier KIM will use to choose the correct responsibility information for a given doc type. The document type must pass the provided identifier to KIM.  This is only used in OLE based data for the routing of group documents. The group type ID is populated here and determines how the document routes (Chart and Organization type groups do organization review routing and default group types do not).


# Locations

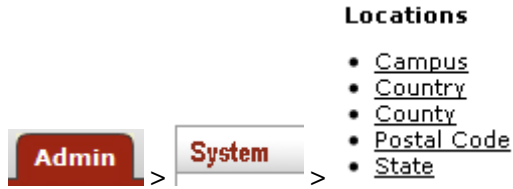

The Locations submenu group provides access to screens in which you define valid values for various types of location information in OLE.

All OLE users may look up valid values in these documents, but only members of the KR-SYS Technical Administrator or OLE-SYS Manager roles may copy, edit and create new codes via these documents. These documents do not route for approval.

# Campus



The CampusMaintenanceDocument is used to identify the different fiscal and physical operating entities of an institution for use in OLE. A campus may be identified as a fiscal entity, a physical entity, or both.

When the user chooses the Campus option, the system displays the Campus Lookup screen. After the user selects a campus or clicks the create new button, the system presents the CampusMaintenanceDocument.

# Document Layout

CampusMaintenanceDocument <span>?</span>		Doc Nbr: 3
		Initiator: a

Document Overview ▼ hide

**Document Overview**

<b>* Description:</b> <input type="text"/>	<b>Explanation:</b> <input type="text"/>
<b>Org. Doc. #:</b> <input type="text"/>	

Edit Campus ▼ hide

**New**

* Campus Code: <input type="text"/>	* Campus Name: <input type="text"/>
* Campus Short Name: <input type="text"/>	* Campus Type Code: <input type="text"/> <span>▼</span> <span>🔍</span>

Notes and Attachments (0) ▶ show

Ad Hoc Recipients ▶ show

Route Log ▶ show

submit save close cancel

## Edit Campus Tab


The CampusMaintenanceDocument includes the **Edit Campus** tab.

In edit mode, the **Edit Campus tab** presents a display-only set of fields on the left and editable fields on the right in which the user may enter changes.

### Edit Campus tab definition

Title	Description
Campus Code	Required. The unique identifying code assigned to a campus.
Campus Name	Required. The familiar name for a specific university campus.
Campus Short Name	Required. An abbreviated name for a specific campus; used in reports in which space is limited.
Campus Type Code	Required. Indicates the type of campus. Valid values are: B: - Both F - Fiscal P - Physical

## Country



The Country Maintenance document is used to assign specific identifying codes to country names.

When the user chooses the **Country** option from the menu, the system displays the Country Lookup screen. After the user selects a country or clicks the **create new** button, the system presents the Country Maintenance document.

## Document Layout

CountryMaintenanceDocument	Doc Nbr: 5387	Status
	Initiator: ole-khuntley	Created

Document Overview ▼ hide

---

**Document Overview**

* Description: <input type="text"/>	Explanation: <input style="width: 100%;" type="text"/>
Organization Document Number: <input type="text"/>	

Edit Country ▼ hide

---

**New**

* Country Code: <input type="text"/>	
* Country Name: <input type="text"/>	
Alternate Country Code: <input type="text"/>	
Active Indicator: <input checked="" type="checkbox"/>	

Notes and Attachments (0) ▶ show

Ad Hoc Recipients ▶ show

Route Log ▶ show

submit save close cancel

### Edit Country Tab


The Country Maintenance document includes the **Edit Country** tab.

In edit mode, the **Edit Country** tab presents a display-only set of fields on the left and editable fields on the right in which the user may enter changes.

#### Edit Country tab definition

Title	Description
Country Code	Required. A unique identifying code assigned to a country.
Country Name	Required. A familiar name of a specific country.
Alternate Country Code	An alternative code assigned to a country.
Active Indicator	Indicates whether this country code is active or inactive in OLE. Remove the check mark to deactivate this country code.

## County



The County Maintenance document is used to assign specific identifying codes to county names.



When the user chooses the **County** option from the **Admin** menu tab, the system displays the County Lookup screen. After the user selects a county or clicks the **create new** button, the system presents the County Maintenance document.

## Document Layout

The screenshot shows the 'CountyMaintenanceDocument' interface. At the top right, there are fields for 'Doc Nbr: 3269' and 'Initiator: amd'. The main content area is divided into several sections:

- Document Overview**: Contains fields for '\* Description:', 'Org. Doc. #:', and 'Explanation:'.
- Edit Counties**: Contains a 'New' section with fields for '\* Country Code:', '\* County Code:', '\* State:', '\* County Name:', and 'Active Indicator:'.
- Notes and Attachments (0)**: A section with a 'show' button.
- Ad Hoc Recipients**: A section with a 'show' button.
- Route Log**: A section with a 'show' button.

At the bottom of the interface, there are buttons for 'submit', 'save', 'close', and 'cancel'.

## Edit Counties Tab


The County Maintenance document includes the **Edit Counties** tab.

In edit mode, the **Edit Counties** tab presents a display-only set of fields on the left and editable fields on the right in which the user may enter changes.

### Edit Counties tab definition

Title	Description
Country Code	The country code for the country in which this county is located.
County Code	A unique identifying code assigned to this county.
State	The state abbreviation assigned to the state in which a county is located.
County Name	Required. The familiar name of this county.
Active Indicator	Indicates whether the county code is active or inactive in OLE. Remove the check mark to deactivate this county code.

## Postal Code



The Postal Code Maintenance document defines the zip code by city and state. When the user chooses the **Postal Code** option from the **Admin** menu tab, the system displays the Postal Code Lookup screen. After the user selects a postal code or clicks the **create new** button, the system presents the Postal Code Maintenance document.

## Note

The user may also enter a city and state to find the associated zip code.

## Document Layout

## Edit Postal Codes Tab


The Postal Code Maintenance document includes the **Edit Postal Codes** tab.

In edit mode, the **Edit Postal Codes** tab presents a display-only set of fields on the left and editable fields on the right in which the user may enter changes.

### Edit Postal Codes tab definition

Title	Description
Country Code	The country code for the country associated with the zip (postal) code.
Postal Code	Identifies a Postal Service code.
State	Required. The state associated with the zip (postal) code.
County Code	The unique identifying code for the county associated with the zip (postal) code.
City Name	Required. The name of the city associated with the zip (postal) code.
Active Indicator	Indicates whether the postal code is active or inactive in OLE. Remove the check mark to deactivate this postal code.

# State



The State Maintenance document defines the U.S. Postal Service codes used to identify states. When the user chooses the **State** option from the **Admin** menu tab, the system displays the State Code Lookup screen. After the user selects a state code or clicks the **create new** button, the system presents the State Maintenance document.

## Document Layout

StateMaintenanceDocument ?

Doc Nbr:	3
Initiator:	a

Document Overview
▼ hide

**Document Overview**

* Description: <input style="width: 95%;" type="text"/>	Explanation: <input style="width: 95%;" type="text"/>
Org. Doc. #: <input style="width: 80%;" type="text"/>	

Edit States
▼ hide

**New**

* Country Code: <input style="width: 95%;" type="text"/>	<input type="button" value="🔍"/>	
* State Abbreviation: <input style="width: 95%;" type="text"/>		
* State Name: <input style="width: 95%;" type="text"/>		
Active Indicator: <input type="checkbox"/>		

Notes and Attachments (0)
▶ show

Ad Hoc Recipients
▶ show

Route Log
▶ show

## Edit States Tab

The State Maintenance document includes the **Edit States** tab.

In edit mode, the **Edit States** tab presents a display-only set of fields on the left and editable fields on the right in which the user may enter changes.

### Edit States tab definition

Title	Description
Country Code	A unique identifying code assigned to the country of which this state is a part.
State Abbreviation	The state abbreviation.
State Name	Required. The full name of the state associated with the state abbreviation.
Active Indicator	Indicates whether the state code is active or inactive in OLE. Remove the check mark to deactivate the state code.

# Identity Management Reference

## Identity Management Reference

- [Address Type](#)
- [Affiliation Type](#)
- [Campus Type](#)
- [Citizenship Status](#)
- [Email Type](#)
- [Employment Status](#)
- [Employment Type](#)
- [Entity Type](#)
- [External Identifier Type](#)
- [Name Type](#)
- [Phone Type](#)
- [Role/Group/Permission/Responsibility Type](#)




The Reference submenu group allows you to define valid types of personal information collected for KIM.

All OLE users may look up valid values in the reference tables.

Most of these tables cannot be updated directly by functional users. Adding new values or modifying existing values requires technical assistance to ensure that code is in place to handle the new or modified values.

Where editing is possible, only users with an appropriate role may copy, edit or create new codes in the tables.

## Address Type




The Address Type Lookup displays the types of addresses that may be associated with Person records in KIM.

### Note

Address types cannot be edited via the interface. Technical assistance is required to add new or edit existing address types.

## Document Layout

**Address Type Lookup** 

<b>Address Type Code:</b>	<input type="text"/>
<b>Address Type Name:</b>	<input type="text"/>
<b>Active Indicator:</b>	<input type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

3 items retrieved, displaying all items.


<u>Address Type Code</u>	<u>Address Type Name</u>	<u>Display Sort Code</u>	
HM	Home	b	Yes
OTH	Other	c	Yes
WRK	Work	a	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Address Type Lookup results definition

Title	Description
Address Type Code	Display only. The unique code for this type of address.
Address Type Name	Display only. The familiar title of this address type.
Display Sort Code	Display only. An alphabetical character used to determine the order in which address types are displayed in the list on the Person document.
Active Indicator	Display only. Indicates whether this address type is active (in which case the system displays it in the Address Type list on the Person document).

## Affiliation Type



Affiliation types specify codes and text descriptions for the different types of affiliations that can be associated with a Person record in KIM. These codes may be used for data sorting or retrieval purposes. The Affiliation Type Lookup displays the valid affiliation code types.

### Note

Affiliation types cannot be edited via the interface. Technical assistance is required to add new or edit existing affiliation types.

## Document Layout

### Affiliation Type Lookup

<b>Affiliation Type Code:</b>	<input type="text"/>
<b>Affiliation Type Name:</b>	<input type="text"/>
<b>Active Indicator:</b>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

4 items retrieved, displaying all items.


<u>Affiliation Type Code</u>	<u>Affiliation Type Name</u>	<u>Display Sort Code</u>	
AFLT	Affiliate	d	Yes
FCLTY	Faculty	b	Yes
STAFF	Staff	c	Yes
STDNT	Student	a	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Affiliation Type Lookup results definition

Title	Description
Affiliation Type Code	Display only. A unique code that identifies this type of affiliation. The base values are:  AFLT = Affiliate, FCLTY = Faculty, STAFF = Staff, STDNT = Student
Affiliation Type Name	Display only. A text description of this type of affiliation.
Display Sort Code	Display only. An alphabetical character used to determine the order in which the system displays affiliation types in the list.
Active Indicator	Display only. Indicates whether this type of affiliation is active (in which case the system displays it in the <b>Affiliation Typelist</b> on the Person document).

## Campus Type



When the user selects **Campus Type** from the **Admin** menu tab, the system displays the Campus Type Lookup. From this screen, the user may either create a new type or search for an existing type. This defines the valid types of campuses that can be selected when creating a new campus.

After performing a search based on user-specified criteria, the system displays a results table. The user may then choose to edit or copy a retrieved record.

After the user selects **create new**, **edit**, or **copy**, the system displays the Campus Type Maintenance document. This document allows users to add and maintain campus types.

### Note

While anyone can view the current values for campus type, only members of OLE-SYS Manager or KR-SYS Technical Manager roles can create new campus types or edit existing values. This document does not route for approval.

## Document Layout

### Edit Campus Type Tab

The Campus Type Maintenance document includes the **Edit Campus Type** tab.

In edit mode, the **Edit Campus Type** tab presents a display-only set of fields on the left and editable fields on the right in which the user may enter changes.

#### Edit Campus Type tab definition

Title	Description
Campus Type Code	Required. Enter a code to identify this type of campus.
Campus Type Name	Required. Enter a descriptive name for this campus type.

## Citizenship Status




The Citizenship Status Lookup is used to display the types of statuses that may be entered on a Person record in KIM.

### Note

Citizenship Status cannot be edited via the interface. Technical assistance is required to add new or edit existing status types.

## Document Layout

**Email Type Lookup** 

**Email Type Code:**   
**Email Type Name:**   
**Active Indicator:**  Yes  No  Both

3 items retrieved, displaying all items.



<u>Email Type Code</u>	<u>Email Type Name</u>	<u>Display Sort Code</u>	
HM	Home	b	Yes
OTH	Other	c	Yes
WRK	Work	a	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Citizenship Status Lookup results definition

Title	Description
Citizenship Status Code	The code used to identify citizen status.
Citizenship Status Name	The familiar name of the citizen status.
Active Indicator	Display only. Indicates whether this citizen status type is active (in which case the system displays it in the <b>Citizen Status</b> list on the Person document).

## Email Type

 > 
  > | 
 Reference > • [Email Type](#) > **Email Type Lookup**


The Email Type Lookup is used to display the types of email addresses that may be entered on a Person record in KIM.

### Note

Email types cannot be edited via the interface. Technical assistance is required to add new or edit existing email types.



## Document Layout

**Email Type Lookup** 

Email Type Code:

Email Type Name:

Active Indicator:  Yes  No  Both

3 items retrieved, displaying all items.

Email Type Code	Email Type Name	Display Sort Code	
HM	Home	b	Yes
OTH	Other	c	Yes
WRK	Work	a	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Email Type Code Lookup results definition

Title	Description
Email Type Code	Display only. A unique code identifying this type of email address. The base data values are:  HM = Home, OTH = Other, WRK = Work
Email Type Name	Display only. A descriptive label for this type of email address.
Display Sort Code	Display only. An alphabetical character used to determine the order in which email address types are displayed in the list on the Person record.
Active Indicator	Display only. Indicates whether this email address type is active (in which case the system displays it in the <b>Email Type</b> list on the Person document).

## Employee Status



The Employee Status Lookup allows you to view the various status codes that can be assigned to a faculty or staff type of affiliation on the Person document in KIM.

### Note

Employee statuses cannot be edited via the interface. Technical assistance is required to add new or edit existing employee statuses.

## Document Layout

### Employee Status Lookup

<b>Employee Status Code:</b>	<input type="text"/>
<b>Employee Status Name:</b>	<input type="text"/>
<b>Display Sort Code:</b>	<input type="text"/>
<b>Active Indicator:</b>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

7 items retrieved, displaying all items.


<u>Employee Status Code</u>	<u>Employee Status Name</u>	<u>Display Sort Code</u>	
<u>A</u>	Active	01	Yes
<u>D</u>	Deceased	99	Yes
<u>L</u>	On Non-Pay Leave	04	Yes
<u>N</u>	Status Not Yet Processed	03	Yes
<u>P</u>	Processing	02	Yes
<u>R</u>	Retired	10	Yes
<u>T</u>	Terminated	97	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Employee Status Lookup definition

Title	Description
Employee Status Code	Display only. A unique code to identify this employee status code. The base data values are:  A = Active, D = Deceased, L = On Non-Pay Leave, N = Status Not Yet Processed, P = Processing, R = Retired, T = Terminated
Employee Status Name	Display only. A descriptive label for this employee status.
Display Sort Code	Display only. A numeric value used to determine the order in which employee statuses are displayed in the list.
Active Indicator	Display only. Indicates whether this employee status is active (in which case the system displays it in the <b>Employee Status</b> list on the Person document).

## Employee Type



The Employee Type Lookup allows you to view the various status codes that can be assigned to a faculty or staff type of affiliation on the Person document in KIM.

### Note

Employee types cannot be edited via the interface. Technical assistance is required to add new or edit existing employee types.

## Document Layout

### Employee Type Lookup

<b>Employee Type Code:</b>	<input type="text"/>
<b>Employee Type Name:</b>	<input type="text"/>
<b>Active Indicator:</b>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

3 items retrieved, displaying all items.


<u>Employee Type Code</u>	<u>Employee Type Name</u>	<u>Display Sort Code</u>	
<u>N</u>	Non-Professional	02	Yes
<u>O</u>	Other	99	Yes
<u>P</u>	Professional	01	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Employee Type Lookup results definition

Title	Description
Employee Type Code	Display only. A unique code identifying this type of employee. The base data values are:  N = Non-Professional, O = Other, P = Professional
Employee Type Name	Display only. A descriptive label for this type of employee.
Display Sort Code	Display only. A numeric value used to determine the order in which employee types are displayed in the list.
Active Indicator	Display only. Indicates whether this employee type is active (in which case the system displays it in the <b>Employee Type</b> list on the Person document).

## Entity Type




The Entity Type Lookup displays the various entity types recognized in KIM.

### Note

Entity types cannot be edited via the interface. Technical assistance is required to add new or edit existing entity types.

## Document Layout

**Entity Type Lookup** 

---

Entity Type Code:

Entity Type Name:

Active Indicator:  Yes  No  Both

2 items retrieved, displaying all items.

Entity Type Code	Entity Type Name	Display Sort Code	
PERSON	Person	01	Yes
SYSTEM	System	02	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Entity Type Lookup results definition

Title	Description
Entity Type Code	Display only. A unique code that identifies this entity type. The base data values are: PERSON = Person, SYSTEM = System
Entity Type Name	Display only. A descriptive label for this entity type.
Display Sort Code	Display only. A numeric value used to determine the order in which entity types would be displayed in a list.
Active Indicator	Display only. Indicates whether this entity type is active. Because entity types are not viewable elsewhere in the application, inactivation will have no apparent effect.

## External Identifier Type

**Admin** > **System** > **Reference** > **External Identifier Type** > **External Identifier Type Lookup**

The External Identifier Type Lookup displays the identifiers that may be associated with a Person record that has been generated by a non-Kuali system. The only example in OLE base data is Tax ID number.

### Note

External identifier types cannot be edited via the interface. Technical assistance is required to add new or edit existing external identifier types.

## Document Layout

**External Identifier Type Lookup** [?](#)

<b>External Identifier Type Code:</b>	<input type="text"/>
<b>External Identifier Type Name:</b>	<input type="text"/>
<b>Active Indicator:</b>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

One item retrieved.


<u>External Identifier Type Code</u>	<u>External Identifier Type Name</u>	<u>Display Sort Code</u>
TAX	Tax ID	03

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### External Identifier Lookup results definition

Title	Description
External Identifier Type Code	Display only. A unique code that identifies this external identifier type. The base data value is: TAX = Tax ID
External Identifier Type Name	Display only. A descriptive label for this external identifier type.
Display Sort Code	Display only. A numeric value that determines the order in which external identifier types are displayed in the list.
Active Indicator	Display only. Indicates whether this external identifier type is active.

## Name Type



The Entity Name Type Lookup allows you to view the types of names that can be associated with a person on the **Contact** tab of a KIM Person document.

### Note

Name types cannot be edited via the interface. Technical assistance is required to add new or edit existing name types.

## Document Layout

**Entity Name Type Lookup** ?

---

Entity Name Type Code:

Entity Name Type Name:

Active Indicator:  Yes  No  Both

3 items retrieved, displaying all items.


Entity Name Type Code	Entity Name Type Name	Display Sort Code
OTH	Other	c
PRFR	Preferred	b
PRM	Primary	a

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Entity Name Type Lookup results definition

Title	Description
Entity Name Type Code	Display only. A unique code that identifies this type of name. The base data values are:  OTH = Other, PRFR = Preferred, PRM = Primary
Entity Name Type Name	Display only. A descriptive label for this name type.
Display Sort Code	Display only. An alphabetic value that determines the order in which name types are displayed in the list.
Active Indicator	Display only. Indicates whether this name type is active (in which case the system displays it in the <b>Name Typelist</b> on the Person document).

## Phone Type



The Phone Type Lookup displays codes that identify various categories of phone numbers on the Person document.

### Note

Phone types cannot be edited via the interface. Technical assistance is required to add new or edit existing phone types.

## Document Layout

**Phone Type Lookup** ?

<b>Phone Type Code:</b>	<input type="text"/>
<b>Phone Type Name:</b>	<input type="text"/>
<b>Active Indicator:</b>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

4 items retrieved, displaying all items.


Phone Type Code	Phone Type Name	Display Sort Code	
HM	Home	b	Yes
MBL	Mobile	c	Yes
OTH	Other	d	Yes
WRK	Work	a	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Phone Type Lookup results definition


Title	Description
Phone Type Code	Display only. The code that identifies the type of phone number.
Phone Type Name	Display only. The descriptive name for this type of phone number.
Display Sort Code	Display only. An alphabetic value that determines the order in which phone types are displayed in the list.
Active Indicator	Display only. Indicates whether this phone type is active (in which case the system displays it in the <b>Phone Type</b> list on the Person document).

## Role/Group/Permission/Responsibility Type



When the user selects the **Role/Group/Permission/Responsibility Type** option from the **Admin** menu tab, the system displays the Kim Type Lookup screen. Types are used to associate similar roles, groups, permissions and responsibilities. For example, all roles with the type of 'Campus' will collect a campus code for each member as a piece of qualifying data to tell KIM which campus that member is associated with. New types cannot be created via the interface. Development work needs to occur to make sure that KIM knows how to handle any new type added to the system.

## Document Layout

**Kim Type Lookup**  \* required field

Namespace Code:	KR-NS - Nervous System
Type Name:	
Type Identifier:	
Active Indicator:	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

15 items retrieved, displaying all items.

Namespace Code	Type Name	Type Identifier	Active Indicator
KR-NS	<a href="#">Namespace or Component</a>	10	Yes
KR-NS	<a href="#">Component Field</a>	11	Yes
KR-NS	<a href="#">Namespace or Action</a>	12	Yes
KR-NS	<a href="#">Button</a>	13	Yes
KR-NS	<a href="#">Edit Mode &amp; Document Type</a>	14	Yes
KR-NS	<a href="#">Batch Feed or Job</a>	15	Yes
KR-NS	<a href="#">Parameter</a>	16	Yes
KR-NS	<a href="#">Camous</a>	17	Yes
KR-NS	<a href="#">Derived Role- Permission (Edit Document)</a>	45	Yes
KR-NS	<a href="#">Document Type &amp; Existing Records Only</a>	56	Yes
KR-NS	<a href="#">Component Section</a>	57	Yes
KR-NS	<a href="#">Document Type &amp; Relationship to Note Author</a>	59	Yes
KR-NS	<a href="#">Derived Role- Permission (Open Document)</a>	60	Yes
KR-NS	<a href="#">Namespace</a>	67	Yes
KR-NS	<a href="#">Document Type &amp; Attachment Type</a>	9	Yes

### Kim Type Lookup results definition

Title	Description
Namespace Code	Display only. The namespace code associated with this type.
Type Name	Display only. The descriptive name of this type. Clicking the name takes you to the Type Inquiry and displays the same information available in the lookup plus the name of the KIM service this type is associated with.  The 'service' is the piece of code that tells KIM how to interpret roles, groups, permissions or responsibilities of a given type.
Type Identifier	Display only. The unique identifying number assigned to this type.
Active Indicator	Display only. Indicates whether this type is active. Inactive types are not eligible for selection when creating new roles, groups, permissions, or responsibilities.



---


# Chapter 2. Location Administrative Documents



Location attribute maintenance e-docs are available via the Location submenu on the **Admin** menu tab.

Maintenance docs may be viewed by OLE users but only those in an administrative role may edit any of the e-docs.

## Location Level

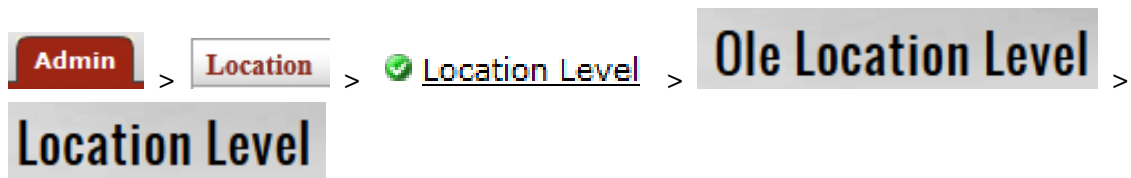

Locations are structured so that a location can be part of another location. The various levels that make up a location are named and structured in this maintenance document.

## Document Layout

<b>Location Level</b>		<b>Document Number:</b> 4354	<b>Docum</b>
		<b>Initiator Network Id:</b> admin	<b>Creation</b>

▼ Document Overview

<b>* Description:</b>	<input type="text"/>	<b>Explanation:</b>	<input type="text"/>
<b>Organization Document Number:</b>	<input type="text"/>		

▼ Add/Edit Location Level

	Old	New
<b>Level Code:</b>	INSTITUTION	INSTITUTION
<b>Level Name:</b>	Institution	<input type="text" value="Institution"/>
<b>Parent Level Id:</b>		

▶ Notes and Attachments (0)

▶ Ad Hoc Recipients

▶ Route Log


  

The OLE Location Level document includes the **Add/Edit Location Level** tab. The system automatically enters data into both the **Old** and **New** sections in this tab. Selected data fields are available for editing.

**Add/Edit Location Level tab definition**

Title	Description
Level Code	The code to identify location level
Level Name	Required. The familiar title of this location level
Parent Level ID	The level in the hierarchy above this location level

## Location

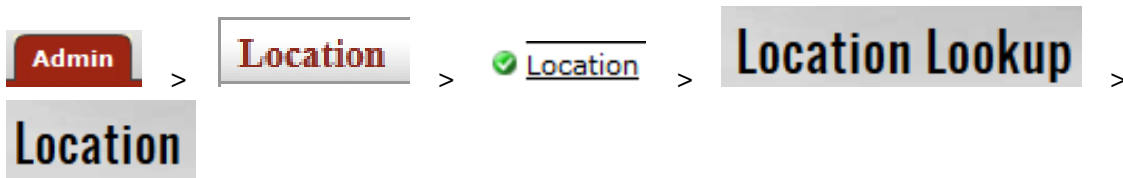

The goals of the location system are to:

1. Model the organization’s structure clearly and accurately.
2. Support storing configuration information at the appropriate level of the organizational structure.
3. Allow libraries to establish policies for a location that apply to the organization’s components. This makes administration easier.

4. Support modeling relationships between parts of the organization.
5. Support consortial models.

The general idea is that a location's setting or policy will automatically apply to the location's children, unless the children override the setting.

## Document Layout

<b>Location</b>		<b>Document Number:</b> 4355
		<b>Initiator Network Id:</b> admin

<b>Document Overview</b>			
<b>* Description:</b>	<input type="text"/>	<b>Explanation:</b>	<input type="text"/>
<b>Organization Document Number:</b>	<input type="text"/>		

<b>Add/Edit Location</b>		
	<b>Old</b>	<b>New</b>
<b>Location Code:</b>	B-EDUC	<input type="text" value="B-EDUC"/>
<b>Location Name:</b>	Blmgtm - Education Library	<input type="text" value="Blmgtm - Education L"/>
<b>Location Level:</b>	3	<input type="text" value="3"/>
<b>Parent Location:</b>		<input type="text"/>

<b>Notes and Attachments (0)</b>
<b>Ad Hoc Recipients</b>
<b>Route Log</b>


  

The OLE Location document includes the **Add/Edit Location** tab. The system automatically enters data into both the **Old** and **New** sections in this tab. Selected data fields are available for editing.

### Add/Edit Location tab definition

Title	Description
Location Code	The code to identify the location of the Instance Record. Each location must have a unique code with a maximum length of 40 characters.
Location Name	Required. The familiar title of the location. Maximum length is 100 characters.
Location Level	Required. The numerical representation of the location hierarchy. Locally configured, valid values are 1-5.
Parent Location	If the location level is NOT 1, chose a parent location by clicking on the magnifying glass icon. A valid parent location must be at a higher level than the new location being created.

# Location Import



As an alternative to inputting locations manually, OLE allows users to load locations using an XML file conforming to a simple schema. The upload will collect data from a single XML file, parse it, and load the locations. The upload will match on location codes and create new locations for entries without a code, and update existing locations with a code.

## Note

Location Import would most likely be used only during system setup or refresh or any time you need to batch load locations.

Once Locations are loaded, you may access them in OLE Locations.

## Note

For more information about OLE Locations, see [above](#).

A sample location file that validates to our current coded schema is found at the OLE demo Web site:

<https://wiki.kuali.org/display/OLE/OLE+Sample+Files+for+0.8>

# Process Overview

1. From the **Location Import** screen, select a file to upload.

Home » Location Import »

## Location Import

Location Upload:  No file selected.



## Note

You may need to pre-process files to match the schema.

2. Click the  button to process the file.

A success or failure message will appear above the upload field:

[Home](#) » [Location Ingest](#) »

## Location Ingest

Location File Uploaded successfully with Total:53 ,Success:53 , Failure :0

Location Upload:  No file selected.



3. To review the summary, return to the **Admin** menu and click on the **Location Summary** located on the **Location** submenu.

### Note

For more information about the Location Summary, see [below](#).

You may also view locations from **Location** (also on the **Location** submenu).

### Note

For more information about locations, see [above](#).


## Business Rules

Locations will be rejected if:

- A location's parent location references a location that does not exist.
- A location's parent location matches a location at a lower level of the location hierarchy.
- A location's level code does not match a level code in the system.


Note that when loading locations that reference parent locations, the parent locations must already be in the system for the child locations to be created. If you try to load the child locations first, they will be rejected because OLE will not find their location codes. Users need to order the load file so that the parent locations come before the child locations, or load the higher-level locations before the lower-level locations.

## Location Summary




The Location Summary stores uploaded files and allows users to review the xml files uploaded to OLE. It will also give basic information as to record creation, deletion and modification.

## Process Overview

1. From the lookup screen, click  to perform a blank search:

### Ole Location Summary Lookup

	<b>File Name:</b> <input style="width: 90%;" type="text"/>
	<b>Principal name ingested/loaded:</b> <input style="width: 90%;" type="text"/>
	<b>Date ingested/loaded:</b> <input style="width: 80%;" type="text"/> 

search
clear values
cancel

Location Summary ID ▲	File Name ▲	No. of Total Record ▲	No. of Created Record ▲	No. of Updated Record ▲	No. of Failed Record ▲	Princi inges
4	DukeLocations.xml	190	190	0	0	
5	IndianaLocations.xml	239	239	0	0	
6	UChicLocations.xml	174	174	0	0	
7	iu librariesSampleLocations.xml	53	7	46	0	admin

Showing 1 to 4 of 4 entries

The location summary search results will present users with the **Location Summary ID**, **File Name**, **No of Total Records**, **No. of Created Records**, **No of Updated Records**, **No. of Failed Records**.


2. You may now view locations from **Location**.

### Note

For more information about locations, see [above](#).

---

# Chapter 3. Batch Administrative Documents

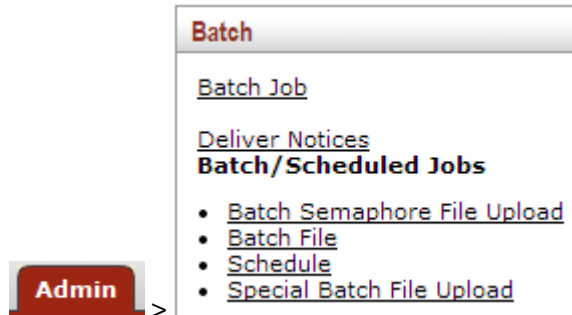


These screens represent places where users can upload files used by various OLE batch jobs, run batch jobs and see files generated by those jobs for Accounts Receivable, Financial Processing, General Ledger, and System processes.

## Batch Job

## Deliver Notices

## Batch/Scheduled Jobs

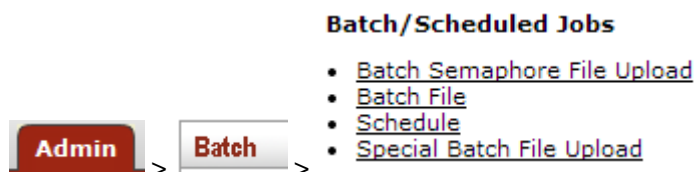

These options allow users to run OLE batch jobs and to view the files that they output.


## Batch Semaphore File Upload

## Batch File



The Batch File lookup allows users to view OLE files, reports and logs. Users can search for files by name, date and by indicating what OLE file directory they reside in. Batch files can be downloaded or deleted.

Only members of OLE-SYS Manager group can download and act on batch files through this interface.

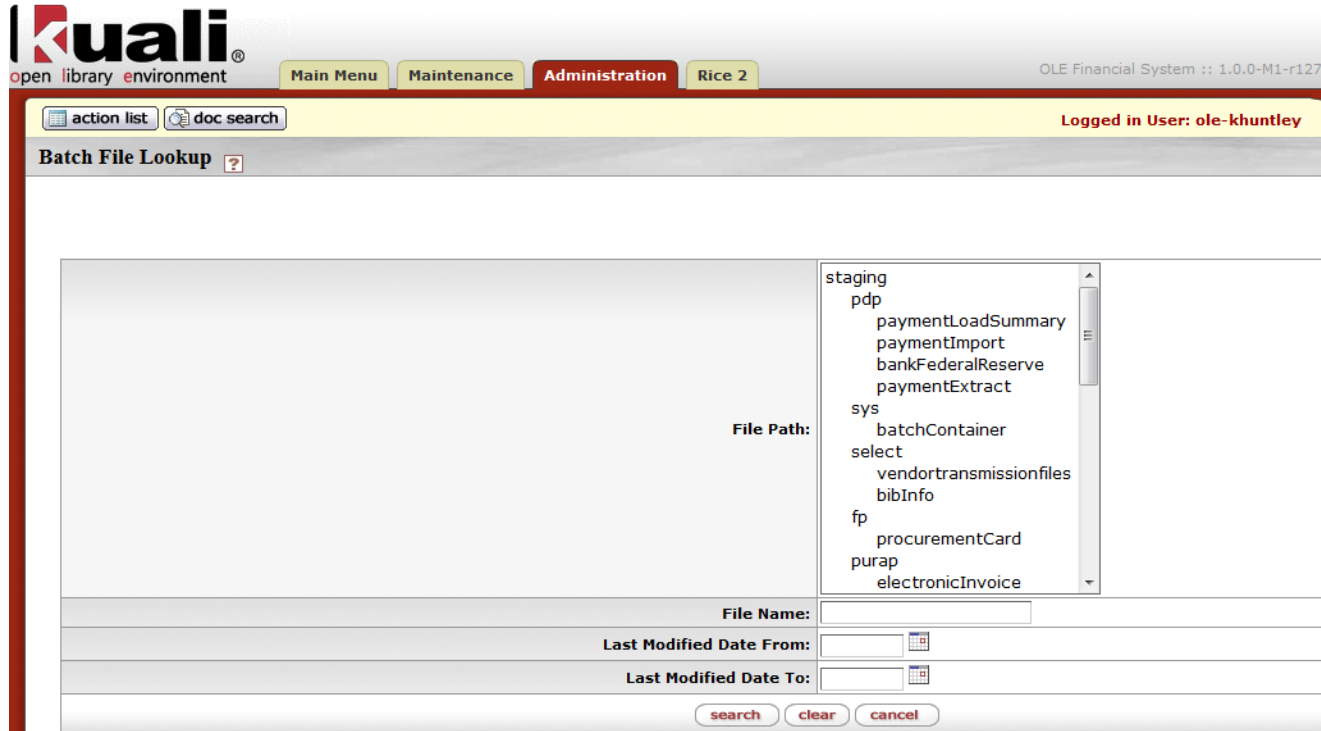

**Batch File Lookup screen definition**

Title	Description
File Path	<p>Select the directory or sub-directory in which the file you wish to retrieve resides. Click the directory you wish to search.</p> <p>In the default configuration the 'reports' directory contains reports and log files generated by batch jobs. These reports exist in sub-directories corresponding to the module that owns the batch job.</p> <p>The Staging directory contains input files brought into OLE (such as procurement card or collector upload files) as well as export files generated by OLE (such as check files from PDP). These reports also exist in sub-directories corresponding to the module they are associated with.</p> <p>Some modules may have additional sub-directories further dividing their Staging output.</p>
File Name	Enter the file you wish to retrieve.
Last Modified Date From	Enter or use the calendar to select a beginning date range for your search.
Last Modified Date To	Enter or use the calendar to select an ending date range for your search.

Reports that match your search will be displayed, showing their name, location and file size (in bytes.) Options in the Actions column allow you to Download or Delete the files.

Actions	File Path	File Name	Last Modified
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	transactionWithExtraFields.xml	07/23/2009 06:00
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	allTransDifferentCC.xml	07/23/2009 06:00
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	allTransSameCC.xml	07/23/2009 06:00
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	badChartData.xml	07/23/2009 06:00
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	badXmlFile.xml	07/23/2009 06:00
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	fieldsInWrongOrder.xml	07/23/2009 06:00
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	transactions1.xml	07/23/2009 06:00



Note that manually deleting files via this interface should be done with great caution. There is no interface to undo a deletion and removing certain files may cause batch jobs or processes to fail.

The most common use for deleting a file is to remove a '.done' file from data files such as those created by the GLCP, LLCP or uploaded via the Collector. OLE creates two files for these particular processes, one ending in a '.data' extension and another ending in a '.done' extension. Deleting the '.done' extension file will keep the associated '.data' file from being processed by its associated batch processes but leave the data file itself for reference.

## Schedule



The Schedule option allows users to view, schedule or execute OLE batch processes (commonly called 'jobs' or 'batch jobs').

Only members of OLE-SYS Operations or KR-SYS Technical Administrator role modify batch jobs through this interface though all users can use the batch job lookup. Members of OLE-SYS Operations can edit any existing schedule job belonging to an OLE namespace. Members of KR-SYS Technical Administrators can edit any existing schedule job belonging to the KR namespace.

When you select the **Schedule** option from the **Admin** menu, the system displays the Batch Job Lookup. This screen allows you to search for batch jobs by namespace, name, group, and statuses.



### Batch Job Lookup screen definition

Title	Description
Namespace	Select the Namespace (application and module) the job is associated with.
Job Name	Enter the name of the job prescribed by the system.
Job Group	Select from the Job Group list. The valid selections are Scheduled: Jobs which are on the standard schedule. Jobs in this group are automatically executed by the schedulerJob. Unscheduled: Normal groups, all jobs are present in this group. These jobs must be executed manually.

Job Status

Select from the Job Status list. The valid selections are:

Scheduled: Job has been scheduled for later execution  
 Succeeded: Job finished executing successfully  
 Cancelled: Job was cancelled, either before or during execution  
 Running: Job is currently executing  
 Failed: Job failed during execution

For more detail about the status of a job or any problems it encountered while executing you can view its associated log file using the Batch File Lookup.

The screen returns the applicable list of jobs:

Actions	Namespace	Job Name	Job Group	Job Status	Next Run Time	Steps
<a href="#">Modify</a>	OLE-COA	populatePriorYearDataJob	unscheduled			updatePriorYearDat
<a href="#">Modify</a>	OLE-COA	cfdaJob	unscheduled			cfdaBatchStep
<a href="#">Modify</a>	OLE-COA	addPriorYearAccountsJob	unscheduled			addPriorYearAccoun

Click the **Modify** link to open the Modify Batch Job maintenance e-doc.

## Document Layout

From the Modify Batch Job e-doc, you can run the standard scheduler.

**Modify Batch Job**

---

**Job Info** ▼ hide

Job Info		Running	
Job Name:	purchasingPreDisbursementExtractJob	Job Group:	unscheduled
Job Status:	<a href="#">Batch File lookup (to retrieve logs and reports)</a>		Start Step: <input type="text" value="1"/>
			End Step: <input type="text" value="2"/>
			Start Date/Time: <input type="text"/>
			Results Email Address: <input type="text"/>
			<input type="button" value="mail to me"/>
			<input type="button" value="run"/>

**Steps** ▼ hide

#	Name
1	purchasingPreDisbursementImmediatesExtractStep
2	purchasingPreDisbursementExtractStep

**Dependencies** ▼ hide

autoApprovePaymentRequestsJob (softDependency)

### Note

When the server is restarted, the Job Info values revert back to the original setting unless the configuration is changed.

This e-doc contains the **Job Info** tab, the **Steps** tab, and the **Dependencies** tab.

## Job Info Tab

The **Job Info** tab displays the basic information about the job and allows you to schedule or unschedule the job. The **Job Info** tab includes three sections: **Job Info**, **Running**, and **Other Commands**.

### Job Info Section

In addition to listing the basic information about the job, clicking the Batch File Lookup URL takes you to the Batch File Lookup screen where you may view logs and reports generated by batch jobs.

**Batch File Lookup** ?

<p><b>File Path:</b></p>	staging pdp paymentLoadSumm paymentImport bankFederalReserv paymentExtract sys batchContainer select vendortransmission bibInfo fp procurementCard purap electronicInvoice
<b>File Name:</b>	<input type="text"/>
<b>Last Modified Date From:</b>	<input type="text"/>
<b>Last Modified Date To:</b>	<input type="text"/>
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

### Running Section

The **Running** section allows a user to control a job schedule. When the user has appropriate access, the Running section displays information necessary to schedule a job.

By default, when clicking the run button, the system runs all steps of the job immediately or you may schedule the job to start at the specified date and time.


### Note

These parameters can be modified to only run a subset of steps on a job (shown in the **Steps** tab).

**Running**

Start Step:

End Step:

Start Date/Time:  

Results Email Address:

If you want to receive an email after the job completes, fill in the email address field or click the **Mail to Me** button to populate the email address from your user profile into the field. Otherwise, an email will be sent only on job failure, and it will be sent to the batch mailing list.

### Other Commands Section

You may issue the following commands from this section:

- Click  to remove the job from the scheduled group. Clicking 'Unschedule' will remove the job from the scheduled group even if you are viewing an unscheduled version of the job when you click it.
- If a job is currently running, you can request that it be interrupted. This does not guarantee an immediate stop.

### Steps Tab

The **Steps** tab displays all the steps that make up this batch job. Steps are displayed in the order they are performed.

Steps <input type="button" value="hide"/>	
#	Name
1	purchasingPreDisbursementImmediatesExtractStep
2	purchasingPreDisbursementExtractStep

### Dependencies Tab

The **Dependencies** tab displays all the other jobs on which the scheduled version of the current job depends. Batch jobs can have hard or soft dependencies. A soft dependency means that this job will not run until that dependent job has completed, but will run regardless of whether or not the job it depends on completed successfully. A hard dependency indicates that the job must not only complete before this job runs but it must complete successfully.


Note that you can run an unscheduled job without regard to the specified dependencies. The job will run automatically when the **run** button is clicked.

**Dependencies**

▼ hide


autoApprovePaymentRequestsJob (softDependency)

# Chapter 4. Batch Framework Administrative Documents

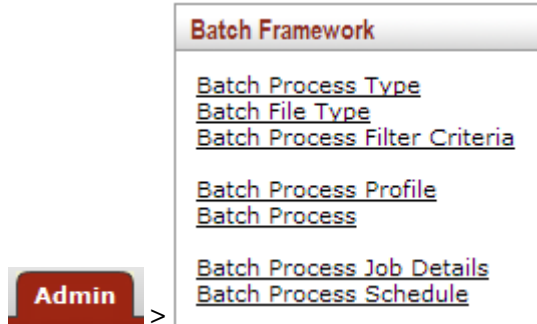

The Batch Framework submenu allows you to perform a variety of functional and technical activities that process cataloging records in batch.

## Batch Process Type



The **Batch Process Type** is a maintenance document used to support batch process profile. You cannot add or edit Batch Process Types.

**Batch Process Type**

<b>Batch Process Type Id:</b>	<input type="text"/>	
<b>Batch Process Type Name:</b>	<input type="text"/>	
<b>Batch Process Type Code:</b>	<input type="text"/>	
<b>Batch Process Type Active:</b>	<input type="text" value="Y"/>	

Batch Process Type Id	Batch Process Type Name	Batch Process Type Code
12	Order Record Import	ord_rec
13	Invoice Import	inv_ing
14	Batch Delete	bat_del
15	Batch Export	bat_exp
16	Patron Import	pat_ing
17	Bib Import	imp_bib
18	Location Import	loc_ing

Showing 1 to 7 of 7 entries

As a function of OLE, you may search for batch process types. Execute a blank search to review the available batch process types.

# Batch File Type

**Admin** > **Batch Framework** > Batch File Type > **OLEBatchProcessFileType**

The **Batch File Type** is a maintenance document used to support batch process profile. You cannot add or edit Batch File Types.

### OLEBatchProcessFileType

<b>Id:</b>	<input type="text"/>
<b>File Name:</b>	<input type="text"/>
<b>File Type:</b>	<input type="text"/>
<b>Data Type:</b>	<input type="text"/>

Id	File Name	File Type
4	XML	XML
5	EDI	EDI
6	MRC	MRC

Showing 1 to 3 of 3 entries

As a function of OLE, you may search for batch file types. Execute a blank search to review the available batch file types.

# Batch Process Filter Criteria

**Admin** > **Batch Framework** > Batch Process Filter Criteria > **OLEBatchProcess Filter Criteria**

The **Batch Process Filter Criteria** is a maintenance document used to support batch process profile. You cannot add or edit Batch Process Filter Criteria.

## OLEBatchProcess Filter Criteria


Field Id:	<input type="text"/>
Field Name:	<input type="text"/>
Field Display Name:	<input type="text"/>
Field Type:	<input type="text"/>

Field Id	Field Display Name	Field Name
1	Date Updated	dateUpdated
2	Date Entered	dateEntered
3	Created By	createdBy
4	Updated By	updatedBy
5	Bib Local ID	LocalId_search
6	Bib Status	Status_search
7	Staff Only	staffOnlyFlag

Showing 1 to 7 of 7 entries

As a function of OLE, you may search for batch process filter criteria. Execute a blank search to review the available batch process filter criteria.

## Batch Process Profile



When you select the **Batch Process Profile** link from the **Admin** menu, the system displays the Batch Process Profile lookup. This screen allows staff to search for and edit preexisting Batch Process Profiles or create new.



## Document Layout

<b>Batch Process Profile</b>		<b>Document Number:</b> 5026	<b>Docum</b>
		<b>Initiator Network Id:</b> ole-khuntley	<b>Creation T</b>
<b>▼ Document Overview</b>			
	<b>* Description:</b> <input style="width: 90%;" type="text"/>	<b>Explanation:</b> <div style="border: 1px solid #ccc; height: 40px;"></div>	
	<b>Organization Document Number:</b> <input style="width: 80%;" type="text"/>		
<b>▼ Main Section</b>			
	<b>Batch Process Name:</b> <input style="width: 90%;" type="text" value="Test_Patron_Import"/>	<b>Description:</b> <input style="width: 90%;" type="text" value="Test_Desc_Patron"/>	
	<b>Batch Process Type:</b> <input style="width: 90%;" type="text" value="Patron Import"/>		
<b>▶ Notes and Attachments (0)</b>			
<b>▶ Ad Hoc Recipients</b>			
<b>▶ Route Log</b>			

When creating a new Batch Process Profile, the only unique tab is the **Main Section**. However, depending on the **Batch Process Type** that is selected, different tabs are available for adding or modifying information for the profile.

### Main Section tab

The **Main Section** tab contains basic information about the Batch Process Profile. Additional fields will appear in the Main Section tab depending on the Batch Process Type that is selected.

<b>▼ Main Section</b>	
<b>Batch Process Name:</b>	<input style="width: 95%;" type="text"/>
<b>Batch Process Type:</b>	<input style="width: 95%;" type="text"/>

#### Main Section definition

Title	Description
Batch Process Name	Enter the name of the Batch Process.
Batch Process Type	Required. Enter the type of batch process or search for it from the lookup . For example, import patron, export bib, import order.
Description	Display only. Indicates whether the vendor is a parent or child record.
KRMS Profile	If the <b>Order Record Import</b> type is selected, select the KRMS Profile from the dropdown list.  <b>Note</b> For 1.0, choose YBP.

Batch Framework  
Administrative Documents

Requisitions for Titles	If the <b>Order Record Import</b> type is selected, select from the dropdown list to have one requisition created per title or one requisition created for the order.
Data to Export	If the <b>Batch Export</b> type is selected, select from the dropdown list to have only bibliographic data exported or bibliographic and instance data exported.
Export Scope	If the <b>Batch Export</b> type is selected, select from the dropdown list how much should be exported: full export, filtered, incremental, or full except staff only bibs.

For **Patron import**, **Location import**, and **Invoice import**, the **Main Section** is the only tab available for adding or editing information.

Click  .

Additional information for all other batch process types will be addressed below.

## Order Record Import: Constant and Default Values Tab


If the **Order Record Import** type is selected from the **Main Section**, a new tab will load. The **Constant and Default Values** tab is used to keep MARC bib, holding, or item fields as default or constant values.

Enter the constant or default values and click  .

### Note

Do not forget to select items for the additional **Main Section** fields.


▼ **Main Section**

<b>Batch Process Name:</b> <input type="text"/>	<b>Description:</b> <input type="text"/>
<b>Batch Process Type:</b> <input type="text" value="Order Record Import"/> 	
<b>KRMS Profile:</b> <input type="text" value=""/> ▼	<b>Requisitions For Titles:</b> <input type="text" value="No"/>

▼ **Constant and Default Values**


* Data Type	Select Field Name	Enter Field Name	Field Value	Default/Constant
<input type="text" value=""/> ▼	<input type="text" value=""/> ▼	<input type="text"/>	<input type="text"/>	<input type="radio"/> Default <input type="radio"/> Constant

### Constant and Default Values definition

Title	Description
Data Type	Select the type of date (bib, holding or item) from the dropdown list.
Select Field Name	If you selected holding or item from the <b>Data Type</b> , select the field name from the dropdown list.
Enter Field Name	Enter the field name to be defined as the constant or default value.
Field Value	Enter the field value to be defined as the constant or default value.
Default/Constant	Select the radio button for default or constant.
Action	Click  to add the Default or Constant value.

Once your **Order Record Import** profile is completed, click  .

## Batch Delete: Bib Match Point Tab

If the **Batch Delete** type is selected from the **Main Section**, a new tab will load. The **Bib Match Point** tab is used to determine what bibliographic records will be deleted from OLE. Enter the **match point** and click . Users may add as many match points as is necessary.



Bib Match Point	
Match Point	Ac
<input type="text"/>	

Showing 0 to 0 of 0 entries

## Batch Export

If the **Batch Export** type is selected from the **Main Section**, four additional tabs will load: **Filter Criteria**, **Data Mapping**, **Delete Field**, and **Rename Field**.

### Note

Do not forget to select items for the additional **Main Section** fields.

▼ **Main Section**

<b>Batch Process Name:</b>	<input type="text"/>	
<b>Batch Process Type:</b>	<input type="text" value="Batch Export"/>	
<b>Data To Export:</b>	<input type="text"/>	

▼ **Filter Criteria**

* Data Type ▲	Select field Name ◆	Enter Field Name ◆	Field Value ◆	Field Range To ◆
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Showing 0 to 0 of 0 entries

▼ **Data Mapping**

**Actions**

▼ **Delete Field**

Field Name ▲	First Indicator ◆	Second Indicator ◆	SubField ◆	SubField ◆
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Showing 0 to 0 of 0 entries

▼ **Rename Field**

Original Tag ▲	Ind 1 ◆	Ind 2 ◆	Subfield ◆	Subfield contains ◆	Rename Tag ◆	Ind 1 ◆	Ind 2 ◆
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Showing 0 to 0 of 0 entries

## Filter Criteria Tab

If you chose filter in the **Export Scope** field of the **Main Section**, enter the filter criteria in the **Filter Criteria** tab and click  .

▼ **Filter Criteria**


* Data Type ▲	Select field Name ◆	Enter Field Name ◆	Field Value ◆	Field Range From
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Showing 0 to 0 of 0 entries


### Filter Criteria definition


Title	Description
Data Type	Select the type of date type (bib, holding or item) from the dropdown list.
Select Field Name	Select the field name from the dropdown list.

Batch Framework  
Administrative Documents

Enter Field Name	If the field name does not appear in the <b>Select Field</b> dropdown list, enter the field name to be defined as the constant or default value.
Field Value	Enter the field value to be defined as the constant or default value.
Field Range From	Enter a beginning field range to limit the filter.
Field Range To	Enter an ending field range to limit the filter.
Action	Click  to add the filter criteria value.


## Data Mapping Tab

Click  to add data mapping options.

**Data mapping** is divided into two sections. The first identifies the source field for the export and the second identifies the destination field for which OLE will map to. Enter the source and destination information and click the  button next to **Priority**.


**▼ Data Mapping**

**Actions**


 

* Data Type	Source Field	Enter Source Field	Source field Value	* Destination Data Type	Destination Field	Enter Destination Field
▼	▼	<input type="text"/>	<input type="text"/>	▼	▼	<input type="text"/>

### Data Mapping definition

Title	Description
Data Type	Select the type of date type (bibmarc, holding or item) from the dropdown list.
Source Field	If you have chosen holding or item as the data type, select the OLE source field from the dropdown menu.
Enter Source Field	If you have chosen bibmarc as the data type, enter a source field. For example "100\$a"
Source Field Value	If you have chosen bibmarc as the data type, enter a source field value.
Destination Data type	Select the type of destination date type (bibmarc, holding or item) from the dropdown list.
Destination Field	If you have chosen holding or item as the data type, select the destination field from the dropdown menu.
Enter Destination Field	If you have chosen bibmarc as the destination data type, enter a destination field. For example "100\$a"
Destination Field Value	If you have chosen bibmarc as the data type, enter a destination field value.
Priority	If the same source field is given multiple destinations, you may prioritize which should be first, second, third, and so on.
Action	Click  to add the Delete Field value.

## Delete Field Tab

The **Delete Field** tab allows you to identify fields that will be deleted during the export. Enter the field information and click . Add as many fields as is needed.

▼ Delete Field				
Field Name ▲	First Indicator ◆	Second Indicator ◆	SubField ◆	SubField Contains ◆
<input style="width: 95%;" type="text"/>	<input style="width: 95%;" type="text"/>	<input style="width: 95%;" type="text"/>	<input style="width: 95%;" type="text"/>	<input style="width: 95%;" type="text"/>

Showing 0 to 0 of 0 entries

### Delete Field definition

Title	Description
Field Name	Enter the bibliographic field name to be deleted. For example "101" or "245"
First Indicator	Optional. Enter the first indicator to be deleted.
Second Indicator	Optional. Enter the second indicator to be deleted.
SubField	Optional. Enter the subfield to be deleted.
SubField Contains	Optional. Enter the information the subfield contains that will be deleted during the export.
Action	Click  to add the Delete Field value.

## Rename Field Tab

The **Rename Field** tab is used to overlay fields during the export. It is divided into two sections. The first identifies the original tag within OLE for the export and the second identifies the newly named field in the exported record. Enter information for both the original and rename tags and click .

▼ Rename Field							
Original Tag ▲	Ind 1 ◆	Ind 2 ◆	Subfield ◆	Subfield contains ◆	Rename Tag ◆	Ind 1 ◆	Ind 2 ◆
<input style="width: 95%;" type="text"/>	<input style="width: 95%;" type="text"/>	<input style="width: 95%;" type="text"/>	<input style="width: 95%;" type="text"/>	<input style="width: 95%;" type="text"/>	<input style="width: 95%;" type="text"/>	<input style="width: 95%;" type="text"/>	<input style="width: 95%;" type="text"/>

Showing 0 to 0 of 0 entries

### Rename Field definition

Title	Description
Original Tag	Enter the OLE tag that you wish to overlay.
Ind 1	Enter the Indicator 1 that will be overlay.
Ind 2	Enter the Indicator 2 that will be overlay.
Subfield	Enter the subfield that will be overlay.
Subfield Contains	Enter the information that the subfield contains that will be overlay.
Rename Tag	Enter the replacing tag name.
Ind 1	Enter the replacing Indicator 1.
Ind 2	Enter the replacing Indicator 2.
Subfield	Enter the replacing Subfield.
Subfield Contains	Enter the information that will be replacing what subfield contains.
Action	Click  to add the Rename Field value.

## Bib Import

If the **Batch Import** type is selected from the **Main Section**, additional tabs will load: **Bib Match Point**, **Bib Overlay/Add**, **Instance Overlay/Add**, **Set Bib Status**, **Staff Only Treatment**, **Changes to Imported Bibliographic Record**, **Data Mapping**, **Protected Field**, **Delete Field**, and **Rename Field** .



Batch Framework  
Administrative Documents

---

**▼ Main Section**

<b>Batch Process Name:</b>	<input type="text"/>	<b>Des</b>
<b>Batch Process Type:</b>	Bib Import <input type="text"/>	<b>Data To</b>

**▼ Bib Match Point**

**Match Point**

Showing 0 to 0 of 0 entries

**▼ Bib Overlay/Add**

**If there is a match perform this operation:**

None  
  \* Overlay  
  Add

**If there is no match perform this operation:**

None  
  Add

\* If multiple matches found the incoming record is rejected and an error is reported

**▼ Instance Overlay/Add**

**When overlaying a bib:**

Delete all existing instances and add new incoming ones  
 Keep all existing instances and add new incoming ones  
 Keep all existing instances and do not add new incoming ones

**When adding a new bib:**

None  
  Add new Instance

**▼ Set Bib Status**

<b>For new records set Bib status as :</b> <input type="text"/>	<b>For Overlaid Bibs:</b> <input type="radio"/> Do not change Status
	<input type="radio"/> Set Status as

**▼ Staff Only Treatment**

<b>For new Bib set Staff Only</b>	<input type="checkbox"/>
<b>For new Instance set Staff Only</b>	<input type="checkbox"/>
<b>For new Item set Staff Only</b>	<input type="checkbox"/>

**▼ Changes to Imported Bibliographic Record**

**Tag 001:**  Delete 001    Change to 035

**▶ Data Mapping**

**▼ Protected Field**

**▼ Globally Protected Fields**

Field Name ▲	First Indicator ◆	Second Indicator ◆	Sub Field ◆	Ignore GPF ◆
790				<input type="checkbox"/>
791				<input type="checkbox"/>
792				<input type="checkbox"/>
793				<input type="checkbox"/>


Showing 1 to 4 of 4 entries

**▼ Profile Protected Fields**

Field Name ▲	First Indicator ◆	Second Indicator ◆	Sub Field ◆	Sub Field Contains ◆	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>




## Bib Match Point Tab


On the **Bib Match Point** tab, you may enter the match point for the bibliographic records, for example . If you add additional match points, OLE will prioritize them by the order they have been entered (First entered, first matched). Enter up to three match points, and click .



Match Point
<input type="text"/>

## Bib Overlay/Add Tab

Depending on the **Data to Import** selection you have chosen on the Main Section Tab, the **Bib Overlay/Add** tab allows user to determine what the course of action will be when importing records. If there is a matched record, you may have OLE **Overlay** the current record, **Add** an additional record, or do nothing by selecting **None**. If you choose to overlay the records, you may decide to ignore this rule for bib statuses of *catalogued* or *cataloguing* records. Click the  button.

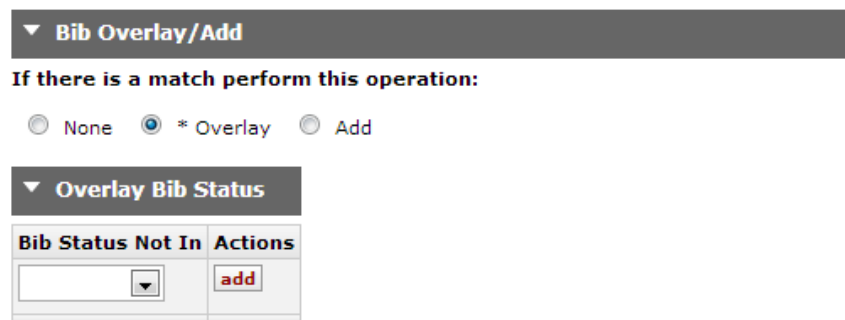


**Bib Overlay/Add**

**If there is a match perform this operation:**

None  \* Overlay  Add

**Overlay Bib Status**

Bib Status Not In	Actions
<input type="text"/>	

**If there is no match perform this operation:**


None  Add

\* If multiple matches found the incoming record is rejected and an error is reported

If no match is found, you may choose to **Add** the new records or not add them by selecting **None**.

## Instance Overlay/Add Tab

Depending on the **Data to Import** selection you have chosen on the Main Section Tab, the **Instance Overlay/Add** tab allows user to determine what to do about Instance records when importing new records. Click the radio button to make your selection.

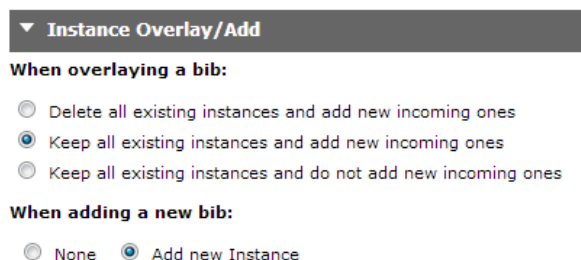

**Instance Overlay/Add**

**When overlaying a bib:**

Delete all existing instances and add new incoming ones  
 Keep all existing instances and add new incoming ones  
 Keep all existing instances and do not add new incoming ones

**When adding a new bib:**

None  Add new Instance

## Set Bib Status Tab

Depending on the **Data to Import** selection you have chosen on the Main Section Tab, the **Set Bib Status** tab allows user to set the statuses of the new or overlaid bibliographic records. Select the statuses from the dropdown menu. For overlaid records, you may choose not to change the status.

▼ **Set Bib Status**

<b>For new records set Bib status as :</b> <input type="text"/>	<b>For Overlaid Bibs:</b> <input type="radio"/> Do not change Status <input checked="" type="radio"/> Set Status as
---	--

## Staff Only Treatment Tab

The **Staff Only Treatment** tab allows user to turn on the staff only flag in the cataloging record. Click the checkbox to apply the staff only flag to new records.

▼ **Staff Only Treatment**

<b>For new Bib set Staff Only</b>	<input type="checkbox"/>
<b>For new Instance set Staff Only</b>	<input type="checkbox"/>
<b>For new Item set Staff Only</b>	<input type="checkbox"/>

## Changes to Imported Bibliographic Record Tab

The **Changes to Imported Bibliographic Record** tab allows user to modify or delete the 001 field if one exists in the incoming record. If you choose to replace the 001 with a new 035, you will be asked about prepending the contents of the 001 with the 003 field in parentheses or with a stated value (the prepended contents of the 003 field then the 001 field will appear on a new 035 field in the imported record).

▼ **Changes to Imported Bibliographic Record**

**Tag 001:**  Delete 001  Change to 035  Prepend contents of tag 003, enclosed in parentheses  Always prepend this value :

## Data Mapping Tab

The **Data mapping** tab is divided into two sections. The first identifies the source field for the import and the second identifies the destination field for OLE. Enter the source and destination information and click the **add** button next to **Priority**.

▼ **Data Mapping**

**Actions**


**add**

**delete**

**Data Mapping Option**

* Data Type	Source Field	Enter Source Field	Source field Value	* Destination Data Type	Destination Field	Enter Destination Field
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

### Data Mapping definition

Title	Description
Data Type	Select the type of date type (bibmarc, holding or item) from the dropdown list.
Source Field	If you have chosen holding or item as the data type, select the OLE source field from the dropdown menu.
Enter Source Field	If you have chosen bibmarc as the data type, enter a source field. For example "100\$a"
Source Field Value	If you have chosen bibmarc as the data type, enter a source field value.
Destination Data type	Select the type of destination date type (bibmarc, holding or item) from the dropdown list.
Destination Field	If you have chosen holding or item as the data type, select the destination field from the dropdown menu.
Enter Destination Field	If you have chosen bibmarc as the destination data type, enter a destination field. For example "100\$a"
Destination Field Value	If you have chosen bibmarc as the data type, enter a destination field value.
Priority	If the same incoming record could have the same information in multiple fields (for example call numbers), you may prioritize which should fill the OLE record first or second, and so on.
Action	Click  to add the Delete Field value.


### Protected Fields Tab

The **Protected Fields** tab is divided into two tabs.

- The **Globally Protected Fields** allows user to view and ignore the globally protected fields. Click the checkbox to ignore any of the fields listed.

#### Note

For information on how to add and maintain globally protected fields, see the section of the *Guide to OLE Select and Acquire: Purchasing and Accounts Payable*.

- The **Profile Protected Fields** allows users to add fields to protect only when using the profile. Input field information and click  .

▼ Protected Field

▼ Globally Protected Fields

Field Name ▲	First Indicator ◆	Second Indicator ◆	Sub Field ◆	Ignore GPF ◆
790				<input type="checkbox"/>
791				<input type="checkbox"/>
792				<input type="checkbox"/>
793				<input type="checkbox"/>


Showing 1 to 4 of 4 entries

▼ Profile Protected Fields

Field Name ▲	First Indicator ◆	Second Indicator ◆	Sub Field ◆	Sub Field Contains ◆	Actions
<input style="width: 100%;" type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input style="width: 100%;" type="text"/>	<input type="button" value="add"/>

Showing 0 to 0 of 0 entries


## Delete Field

The **Delete Field** tab allows you to identify fields that will be deleted during the import process. Enter the field information and click . Add as many fields as is needed.

▼ Delete Field				
Field Name ▲	First Indicator ◆	Second Indicator ◆	SubField ◆	SubField Contains ◆
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>


Showing 0 to 0 of 0 entries

### Delete Field definition

Title	Description
Field Name	Enter the bibliographic field name to be deleted. For example "101" or "245"
First Indicator	Optional. Enter the first indicator to be deleted.
Second Indicator	Optional. Enter the second indicator to be deleted.
SubField	Optional. Enter the subfield to be deleted.
SubField Contains	Optional. Enter the information the subfield contains that will be deleted during the export.
Action	Click  to add the Delete Field value.

## Rename Field

The **Rename Field** tab is used to overlay fields during the import. It is divided into two sections. The first identifies the original tag for the import and the second identifies the newly named field on the OLE record.


Enter information for both the original and rename tags and click .

▼ Rename Field							
Original Tag ▲	Ind 1 ◆	Ind 2 ◆	Subfield ◆	Subfield contains ◆	Rename Tag ◆	Ind 1 ◆	Ind 2 ◆
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>


Showing 0 to 0 of 0 entries

### Rename Field definition

Title	Description
Original Tag	Enter the tag that you wish to rename during import.
Ind 1	Enter the Indicator 1 that will be renamed.
Ind 2	Enter the Indicator 2 that will be renamed.
Subfield	Enter the subfield that will be renamed.
Subfield Contains	Enter the information that the subfield contains that will be renamed.
Rename Tag	Enter the replacing tag name.
Ind 1	Enter the replacing Indicator 1.
Ind 2	Enter the replacing Indicator 2.

Subfield	Enter the replacing Subfield.
Subfield Contains	Enter the information that will be replacing what subfield contains.
Action	Click  to add the Rename Field value.

## Batch Process



The **Batch Process** interface, available from the **Admin** menu, allows staff to run import and export jobs in OLE. Once the job has run, staff may receive notifications of completion, view reports and, for importing, make changes to records as necessary.

## Process Overview

Open the **Batch Process** interface from the **Admin** tab.

**Batch Process**

Document Number  
Initiator Network

**Batch Process Section**

Batch Process Name:


Batch Process Profile Name:  

Batch Process Type:

Batch Size:

Send Job Report To:

**run now** **schedule**

1. Enter a name to distinguish your batch process. This field is not required but it will be helpful. If left blank, the profile name chosen and a number is used by OLE.
2. Choose the **Batch Process Profile**. You may enter the name or search for it from the lookup .
3. Modify the batch size to suite your needs.
4. If you wish to receive the batch process job report via email, enter your email in **Send Job Report To**.
5. Depending on the **Batch Process Type** (autopopulated when the **Batch Process Profile Name** is selected), an **Input Section** or an **Output Section** will appear.
  - **Output Section** is made available for exporting records types. Select the **Output Format** from the dropdown.  
Enter the location of the **Output File**.

## Note

For 1.0, leave this field blank. You will find the exported files here: <http://tst.ole.kuali.org/home/kuali/main/tst/olefs-webapp/work/staging/batchExport/>

Batch Process Section	
Batch Process Name:	<input type="text"/>
Batch Process Profile Name:	<input type="text" value="Test_Batch_Export_full"/>
Batch Process Type:	Batch Export
Batch Size:	<input type="text" value="1000"/>
Send Job Report To:	<input type="text"/>

Output Section	
Output Format:	Marc <input type="text"/>
Output File:	<input type="text"/>

- **Input Section** is made available for most importing record types. Select **Choose File** to search for the file from your local machine.

Batch Process Section	
Batch Process Name:	<input type="text"/>
Batch Process Profile Name:	<input type="text" value="Test_Bib_Import"/>
Batch Process Type:	Bib Import
Batch Size:	<input type="text" value="1000"/>
Send Job Report To:	<input type="text"/>

Input Section	
Upload File:	<input type="button" value="Choose File"/> No file chosen

- **Input Section for Order Records** requires you to choose both a **Marc** and **Edi** file.

Batch Process Section	
Batch Process Name:	<input type="text"/>
Batch Process Profile Name:	<input type="text" value="Test_Order_Import"/>
Batch Process Type:	Order Record Import
Batch Process KRMS Profile:	YBP
Batch Size:	<input type="text" value="1000"/>
Send Job Report To:	<input type="text"/>

Input Section	
Upload Marc File:	<input type="button" value="Choose File"/> No file chosen
Upload Edi File:	<input type="button" value="Choose File"/> No file chosen

6. Click  to begin the job immediately.

Alternatively, you may click  to schedule the job.

7. To review completed batch jobs, review the report, or restart the job see **Batch Process Job Details**.

## Note

For additional information on **Batch Process Job Details**, see [Batch Process Job Details](#)

To Review jobs that are scheduled, reschedule or remove the job from OLE, see **Batch Process Job Schedule**.

## Note

For additional information on **Batch Process Job Schedule**, see [Batch Process Job Schedule](#)

## Scheduling a Batch Process


If you click  to schedule the **Batch Process** job, an additional tab will appear to assist in the scheduling process.


- You may choose to schedule by Cron Expression. Select the radio button next to **Cron Expression** and enter the expression in the available text box.



The screenshot shows a tab titled "Schedule". At the top, there are two radio buttons: "Provide Cron Expression" (which is selected) and "Schedule". Below the radio buttons, there is a label "Enter Cron Expression:" followed by an empty text input box.

- You may also choose the radio button **Schedule** to manually enter when the job should occur. You will have two options:

- One Time:** Enter the date or search for it from the calendar icon  and time for the job to begin.

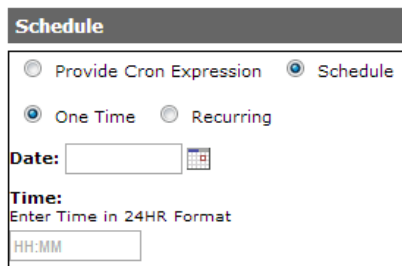

The screenshot shows the "Schedule" tab with the "Schedule" radio button selected. Below it are two more radio buttons: "One Time" (selected) and "Recurring". Under "One Time", there is a "Date:" label, a text input box, and a calendar icon. Below that is a "Time:" label with the instruction "Enter Time in 24HR Format" and a text input box with "HH:MM" as a placeholder.

- Recurring:** Enter the time for the job to begin. If you choose **Weekly** or **Monthly**, you will also need to select the day(s) for the job to occur.

Once your schedule has been determined, click .

# Batch Process Job Details

[Admin](#) > [Batch Framework](#) > [Batch Process Job Details](#) >  
**Batch Process Job Details**

The **Batch Process Job Details** screen displays the batch jobs that have run or are currently running. Staff may also restart a job, view the job report and remove the job from OLE.

▼ **Batch Process Job Details**

Show  entries

Job Id	Job Name	Batch Process Type	User Name	Total Records	Records Processed	%Completed	Start Time	End Time
6	JFTestBatchImport_6	Bib Import	ole-khuntley	0	0	0.0%	09/04/2013 12:38 PM	09/04/2013 12:38 PM
5	FMTestBE_5	Batch Export	admin	100	179	179.00%	09/04/2013 12:37 PM	09/04/2013 12:37 PM
4	Test_Bib_Import_4	Bib Import	ole-khuntley	0	0	0.0%	09/04/2013 12:24 PM	09/04/2013 12:24 PM
3	Test_Bib_Import_3	Bib Import	ole-khuntley	0	0	0.0%	09/04/2013 12:22 PM	09/04/2013 12:22 PM
7	FMTestBE_7	Batch Export	admin	100	179	179.00%	09/04/2013 01:05 PM	09/04/2013 01:06 PM
2	Test_Batch_Export_Incremental_2	Batch Export	ole-khuntley	46	46	100.00%	09/02/2013 01:54 PM	09/02/2013 01:54 PM
1	Test_Batch_Export_full_1	Batch Export	ole-khuntley	46	46	100.00%	09/02/2013 01:50 PM	09/02/2013 01:50 PM

Showing 1 to 7 of 7 entries

# Batch Process Schedule

[Admin](#) > [Batch Framework](#) > [Batch Process Schedule](#) >  
**Batch Process Schedule**


The **Batch Process Schedule** displays jobs that are scheduled to run. Staff may also reschedule or remove the job from OLE.



---

# Chapter 5. Kuali OLE Modules

## Administrative Documents

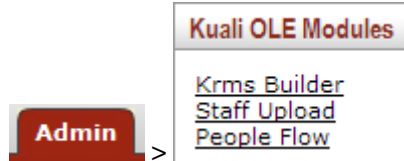

The Kuali OLE Modules submenu allows you to perform a variety of functional and technical activities that affect the entire system. This includes uploading XML and People Flow rules to modify workflows. Users may also access the Staff Upload interface.

## KRMS Builder and Staff Upload


Kuali's Rule Management System (KRMS) supports the creation, maintenance, storage and retrieval of business rules and agendas (ordered sets of business rules) within business contexts (e.g., for a particular department or for a particular university-wide process). KRMS enables you to define a set of rules within a particular business unit or for a particular set of applications. These business rules define logical conditions and the set of actions that result when those conditions are met. KRMS enables you to call and use this logic from any application, without having to re-write and manage all the rules' maintenance logic within the application.

The Staff Upload Interface is used to import batch records. This link described in Select and Acquire: Purchasing and Accounts Payable

### Note

For more information about importing batch records, see the Import section of the *Guide to Purchasing and Accounts Payable*. This and other OLE user guides are available for download from [OLE 0.8 Milestone User Documentation](#).

## People Flow

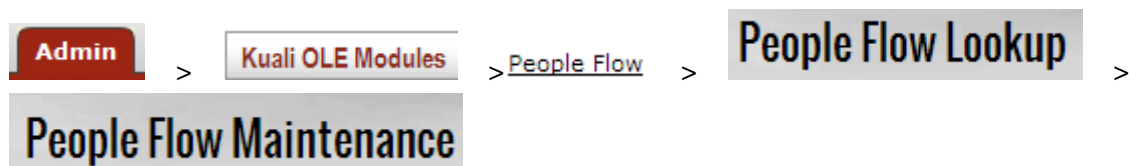

PeopleFlow is, for all intents and purposes, a prioritized list of people to send requests to. It does not require you to specify a hard coded route node in the document type for each individual who might need to approve or be notified. You can define "Stops" in a PeopleFlow, where everything in the same stop proceeds in parallel, but all must be done within the stop before proceeding to the next stop. You can call/execute a PeopleFlow from within a KEW workflow node directly, or you can invoke the Kuali Rules Management System (KRMS) engine from an application and any PeopleFlows that get selected during rule execution, defined in a KRMS agenda, will be called. In this way, you can integrate business rules across

applications and workflows. The same PeopleFlow that defines a routing order among a set of persons, groups or roles can be called by KRMS rules, with the KRMS rules defining which type of request to pass to the PeopleFlow.

## Getting Started

You can search for a PeopleFlow to copy from and modify (be sure to give it a new unique name) or can create a new one (see the top right of the lookup screen).

### People Flow Lookup

[Create New](#)

<b>Id:</b>	<input type="text"/>
<b>Namespace Code:</b>	<input type="text"/> ▼
<b>Name:</b>	<input type="text"/>
<b>Type:</b>	<input type="text"/> ▼
<b>Active:</b>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both

## Document Layout

<b>People Flow Maintenance</b>	<b>Document Number:</b> 6374	<b>Document Status:</b> INITIATED
	<b>Initiator Network Id:</b> ole-khuntley	<b>Creation Timestamp:</b> 01:31 PM 08/30/2013

[expand all](#) [collapse all](#)  
\* indicates required field

**Document Overview**

<b>* Description:</b> <input type="text"/>	<b>Explanation:</b> <input type="text"/>
<b>Organization Document Number:</b> <input type="text"/>	

**PeopleFlow Summary**

<b>* Namespace Code:</b> <input type="text"/>	<b>Description:</b> <input type="text"/>
<b>* Name:</b> <input type="text"/>	
<b>Type:</b> <input type="text"/>	<b>Active:</b> <input checked="" type="checkbox"/>

**PeopleFlow Members**

<b>add</b>
<b>* Stop:</b> <input type="text" value="1"/>
<b>* Member Type:</b> <input type="text" value="Principal"/>
<b>* Member:</b> <input type="text" value="Name"/> <input type="button" value="🔍"/>
<input type="button" value="add"/>

**Notes and Attachments (0)**

**Ad Hoc Recipients**

**Route Log**

The PeopleFlow document includes several unique tabs—**PeopleFlow Summary** and **PeopleFlow Members**.


### PeopleFlow Summary Tab

The **PeopleFlow Summary** tab contains information in which to both identify the PeopleFlow and where the PeopleFlow is applicable.


### PeopleFlow Summary tab definition

Title	Description
Namespace Code	The Namespace to which this PeopleFlow will belong. A Namespace is a way to set both Permissions and Entity Attributes. Each Namespace instance is one level of Permissions and Entity Attributes and is one record in OLE. Select the Namespace from the dropdown list.
Name	Required. The name of the PeopleFlow.
Type	Select the type of PeopleFlow from the dropdown list to assign the PeopleFlow to more specific attributes.  <b>Note</b>  In 1.0, selecting the KR-SAP Sample Type results in an Incident Report.
Description	Enter a description of the PeopleFlow.
Active	Indicates whether this PeopleFlow is active or inactive. Remove the check mark to deactivate.


## PeopleFlow Members Tab




The **PeopleFlow Members** tab allows users to add stops and add members to the PeopleFlow. PeopleFlows that you create can be called by rules, with the rules determining whether the PeopleFlow will be called for an action (such as approvals) or for notifications. Enter the required information and click .

### PeopleFlow Summary tab definition

Title	Description
Stop	Required. The stops in the workflow. Everything assigned to each stop must be complete before moving on to the next stop.
Member Type	Required. Select the Member Type from the dropdown list. PeopleFlows can be assigned to a Principal, a group, or a role.
Member	Enter the member to be assigned to the PeopleFlow stop or search for them from the lookup  .
All or First Action	If the <b>Member Type</b> Role or Group is selected, select <b>ALL</b> or <b>FIRST</b> from the dropdown. Selecting <b>ALL</b> means every person in the role or group must take action. Selecting <b>FIRST</b> requires action from only one person.

## PeopleFlow Members Tab continued


After clicking , an additional menu appears. Below shows an example of two stops added already added:

* Stop:	3			
* Member Type:	Role			
* Member:	<input type="text"/>			
* All or First Action:	FIRST			
				
* Stop	* Member Type	* Member	* All or First Action	
1	Role	KR-LIC : OLE_LicenseReviewer	ALL	
<b>Member Delegates</b>				
* Member Type	* Member	* Delegation Type Code	* All or First Action	Actions
Principal	Name	Primary		
2	Role	KR-LIC : OLE_LicenseManager	FIRST	
<b>Member Delegates</b>				
* Member Type	* Member	* Delegation Type Code	* All or First Action	Actions
Principal	Name	Primary		

From here, **Member Delegates** may be added to allow others to take action for another person.

1. Enter the **Member Type** and the **Member**.
2. Select the **Delegation Type Code** from the dropdown. The two choices are:
  - **Primary Delegate:** The delegator turns over his or her full authority to a primary delegate. The Action Requests for the delegator only appear in the Action List of the primary delegate.
  - **Secondary Delegate:** The secondary delegate acts as a temporary backup and has the same authority as the delegator when the delegator is not available to take action. Documents appear in the Action Lists of both the delegator and the delegate. When either acts on the document, it disappears from both Action Lists. People often have a secondary delegate who takes care of their action requests when they are out of the office.
3. Select **All of First Action** from the dropdown list.

4. Click .

Click  to remove the PeopleFlow stop.


---

# Chapter 6. KRMS Rules Administrative Documents



The KRMS submenu allows you to perform a variety of functional and technical activities that affect the entire system.

## Agenda Lookup




Rules in KRMS are placed into ordered sets called Agendas. The order of the Rules in an Agenda determines the sequencing: which rule gets evaluated first, second and so on. The Agenda also enables you to include conditional branching logic between Rules. In turn, Agendas are created in Contexts, which may represent any categories that are relevant within your institution. For example, they could correspond to document types or business processes or any other categories, such as licensing. Each Context contains its own agendas, and each Agenda contains its own rules. Rules aren't shared across agendas (though you can copy/paste, they become unique Rule instances), and Agendas aren't shared across Contexts. There is no Context hierarchy, that is, Agendas and Rules cannot be inherited across contexts within any sort of hierarchy.

### Tip

Copy rules to save time and typing.

# Document Layout

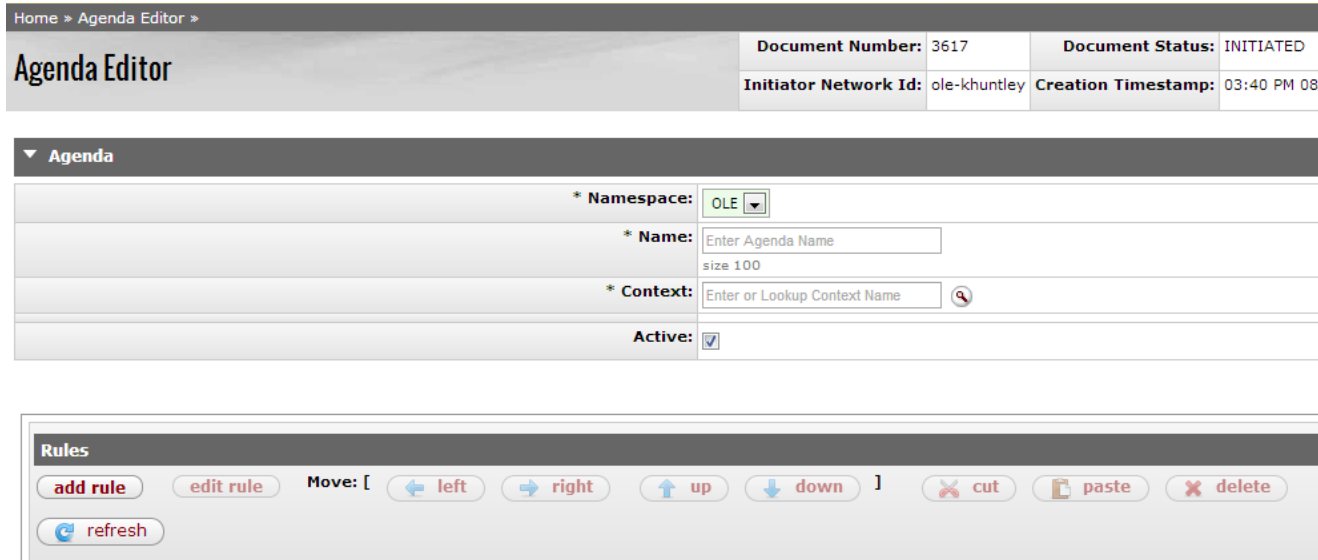


The Agenda Editor includes two unique tabs—**Agenda** and **Rules**.

## AgendaTab

The **Agenda** tab contains information in which to both identify the Agenda itself and where the Agenda will be applied.




### Agenda tab definition



Title	Description
Namespace	Required. The Namespace to which this Agenda will belong.
Name	Required. The name of the Agenda. This is a unique identifier and must be unique to the namespace selected.
Context	Required. A collection of agendas, rules, terms, term specifications.  Enter a Context or search for it from the lookup  .
Type	Select the type of Agenda from the dropdown list to assign the Agenda to more specific attributes.  <b>Note</b>  In 1.0, this is only a placeholder.
Active	Indicates whether this Agenda is active or inactive. Remove the check mark to deactivate.

## Rules tab

From the **Rules** tab, users can add multiple rules to an agenda, move rules around in the workflow, and can cut, paste and delete.

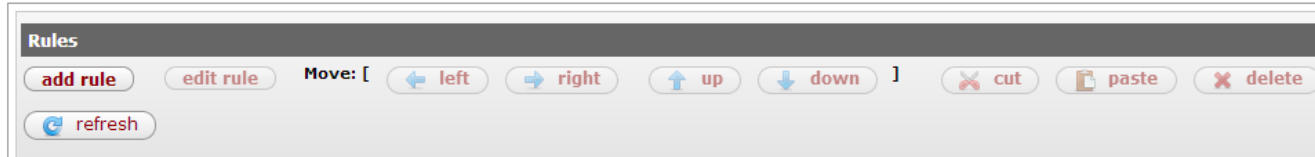

Click **add rule** to open the Rule editor and add a rule. If a rule is already listed, select the rule and click **edit rule**. The Rule Editor will open. The Rule Editor includes two unique tabs—**Rule** which also contains the **Propositions** subtab and **Action**.

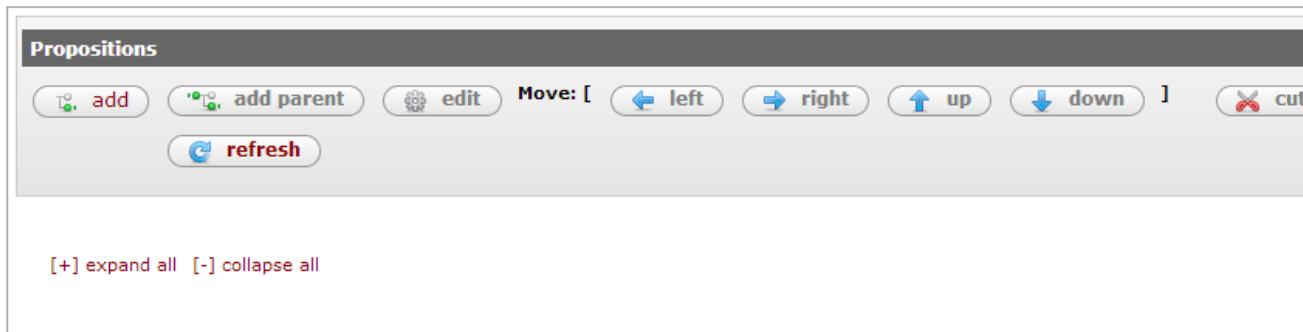



## Rule

Fill in the descriptive information for the rule in the **Rule** tab


### Rule tab definition



KRMS Rules  
Administrative Documents

Title	Description
Copy from Existing Rule	If a similar rule already exists, you may enter the name or search for the rule from the lookup 
Namespace	Display only. The Namespace to which this Rule will belong.
Type	Select the type of rule from the dropdown list to assign the rule to more specific attributes.  <b>Note</b>  In 1.0, this is only a placeholder.
Name	Required. The name of the Rule. This is a unique identifier and must be unique to the namespace selected.
Description	Enter a description for the rule. To expand the description field, click the expand icon  .
Active	Indicates whether this rule is active or inactive. Remove the check mark to deactivate.

### Add Propositions

Add a simple proposition by clicking  under the **Proposition** tab (click **add parent** to add compound propositions). Propositions are functions made up of true and false conditions. Actions can be set to occur when proposition requirements are met.

Once **add** is clicked, OLE brings up a new set of fields.



[+] expand all [-] collapse all

**\* Description:**  
  
size 100

**Category**   
**Term \***   
**Comparison**   
**Value \***

Give the proposition a **Description**.

Select a **Category**, **Term**, and **Comparison** from the dropdown lists. Categories help to narrow down the terms. Terms define a piece of business data that can be used in the construction of proposition (i.e. student GPA, account number, salary, etc.). Enter the **Value** to set the term (i.e. a student GPA of 4.0, "4.0" is the value)

### Add Action

In the **Action** tab, users can define the action that will be fired when the **Proposition** is evaluated.

Select the **Type** of action from the dropdown menu. Depending on your selection, additional fields will become available.

No matter what Type is selected, enter a **Name**.

This is an example of the type **Route to PeopleFlow**, which includes additional required fields:

▼ Action	
Type:	Route to PeopleFlow
* PeopleFlow ID:	PeopleFlow ID size 40
* PeopleFlow Name:	PeopleFlow Name size 40
* Name:	Enter a Action Name size 40
Description:	Enter a Action Description size 4000

Click **add rule** to add this rule to the agenda.

Continue to add as many rules as necessary for the agenda. Once complete click **submit**

## Context Maintenance



Contexts are a collection of agendas, rules, terms, term specifications. In OLE a context of "License" has been established for easy identification of the items related to the licensing business rules.

Each Context contains its own agendas, and each Agenda contains its own rules. Rules aren't shared across agendas (though you can copy/paste, they become unique Rule instances), and Agendas aren't shared across Contexts. There is no Context hierarchy, that is, Agendas and Rules can't be inherited across contexts within any sort of hierarchy.

## Document Layout


<b>Context Maintenance</b>		<b>Document Number:</b> 43
		<b>Initiator Network Id:</b> ac
<b>▼ Document Overview</b>		
<b>* Description:</b>	<input style="width: 100%;" type="text"/>	<b>Explanation:</b>
<b>Organization Document Number:</b>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>
<b>▼ Context</b>		
	<b>Old</b>	<b>New</b>
<b>Id:</b>	10001	10001
<b>Name:</b>	LICENSE_CONTXT	<input style="width: 100%;" type="text" value="LICENSE_CONTXT"/>
<b>Namespace:</b>	OLE	<input style="width: 100%;" type="text"/>
<b>Type:</b>		<input style="width: 100%;" type="text" value="▼"/>
<b>Description:</b>		<input style="width: 100%;" type="text"/>
<b>Active:</b>	true	<input style="width: 100%;" type="text" value="true"/>
<b>▶ Notes and Attachments (0)</b>		
<b>▶ Ad Hoc Recipients</b>		
<b>▶ Route Log</b>		

The Context Maintenance document includes the **Context** tab. The system automatically enters data into both the **Old** and **New** sections. Selected data fields are available for editing.

### Context tab definition


Title	Description
Name	The name of the Context. This is a unique identifier and must be unique to the namespace selected.
Namespace	The Namespace to which this Context will belong. Select the namespace from the dropdown list.
Type	Select a type from the dropdown list to assign the context to more specific attributes.
Description	Enter a description of the context.
Active Indicator	Indicates whether this context is active or inactive. Remove the check mark to deactivate the code.

# Term, Term Specification and Category Lookups




Terms, Term Specifications, and Categories are all related to the Proposition within a Rule. These are maintained by a system administrator.

The following diagram outlines the hierarchy of entities in KRMS (note that some entities are omitted)

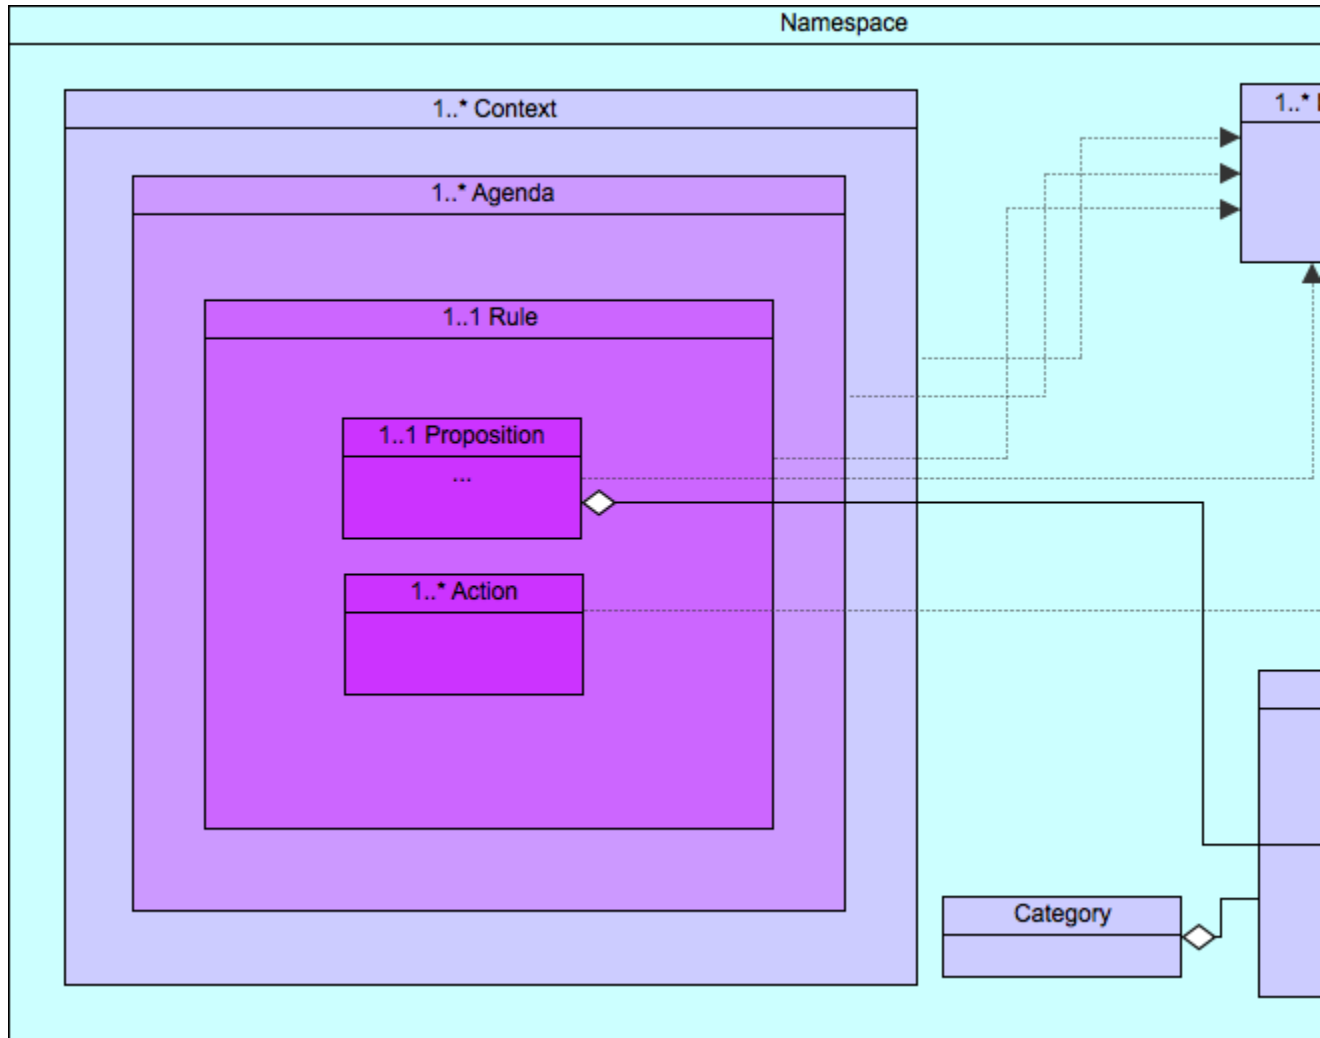


---

# Chapter 7. Global Configuration Settings Administration Documents

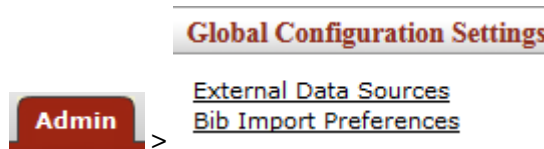

Global Configuration maintenance e-docs are available via the Global Configuration Settings submenu on the **Admin** menu tab.

## External Data Sources (z39.50 connection)

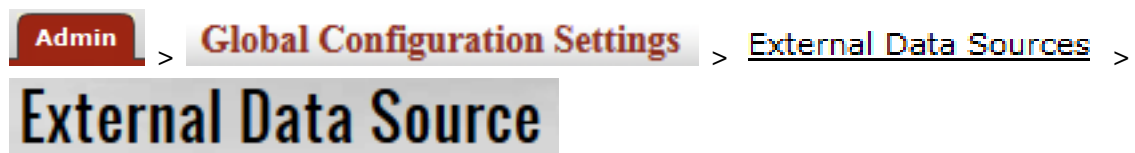

As the **Import Bib from External Data Source** option is available to show the possibility for institutions to import bibliographic records through a Z39.50 protocol, this interface exists to support the functionality. This e-doc can be used to create and maintain the sources for the import.

### Note

Users will need to implement the Z39.50 protocol before using this e-doc.

## Document Layout

<b>External Data Source</b>	<b>Document Number:</b> 4358	<b>Document</b>
	<b>Initiator Network Id:</b> admin	<b>Creation Tim</b>

▼ Document Overview

<b>* Description:</b>	<input type="text"/>	<b>Explanation:</b>	<input type="text"/>
<b>Organization Document Number:</b>	<input type="text"/>		

▼ Add/Edit Data Source

<b>Name:</b>	<input type="text"/>
<b>Description:</b>	<input type="text"/>
<b>Domain Name:</b>	<input type="text"/>
<b>Port Number:</b>	<input type="text"/>
<b>LogIn Id:</b>	<input type="text"/>
<b>Authorization Key:</b>	<input type="text"/>
<b>Password:</b>	<input type="text"/>

▶ Notes and Attachments (0)

▶ Ad Hoc Recipients

▶ Route Log

**Add/Edit Data Source tab definition**

Title	Description
Name	The familiar title of the data source.
Description	The description of the data source.
Domain Name	Enter the web address of the data source.
Port Number	Enter the port number required for accessing the data source.
Login ID	Enter the login ID of the data source.
Authorization Key	Enter the authorization key of the data source.
Password	Enter the password for the data source.

## Bib Import Preferences



Users may set preferences to apply to all records during the import process. These settings can be overridden during the import process.

## Document Layout

<b>User Preferences</b>	<b>Document Number:</b> 4360	<b>Doc</b>
	<b>Initiator Network Id:</b> admin	<b>Creat</b>

<b>Document Overview</b>	
<b>* Description:</b>	<input type="text"/>
<b>Organization Document Number:</b>	<input type="text"/>
<b>Explanation:</b>	<input type="text"/>

<b>Add/Edit User Preference</b>		
	<b>Old</b>	<b>New</b>
<b>Name:</b>	Admin Import	Admin Import
<b>Import Type:</b>	New Import	New Import
<b>Import Bib Status:</b>	None	None <input type="button" value="v"/>
<b>Temporary Location:</b>	FORTWAYNE/FORMICROCARD	<input type="text"/>
<b>Permanent Location:</b>	B-LIFESCI/BLIINDEXES	<input type="text"/>
<b>Removal Tags:</b>	030,830,400	030,830,400
<b>Protected Tags:</b>	050,245,100	050,245,100
<b>Classification Scheme:</b>	LCC - Library of Congress classification	LCC - Library of Congress c
<b>Call Number Source 1:</b>	050	050
<b>Call Number Source 2:</b>	065	065
<b>Call Number Source 3:</b>	020	020

<b>Notes and Attachments (0)</b>
<b>Ad Hoc Recipients</b>
<b>Route Log</b>

The User Preferences document includes the **Add/Edit User Preference** tab. The system automatically enters data into both the **Old** and **New** sections in this tab. Selected data fields are available for editing.

### Add/Edit User Preference tab definition

Title	Description
Name	The familiar title of the user preference.
Import Type	Select the type of import to be performed from the dropdown list.
Import Bib Status	Select a status for the bibliographic records to inherit upon import completion.

## Global Configuration Settings Administration Documents


---

Temporary Location	Optional. Select a temporary location for the bibliographic records to inherit upon import completion.
Permanent Location	Select a permanent location for the bibliographic records to inherit upon import completion.
Removal Tags	Enter any tags to be removed when importing bibliographic records
Protected Tags	Enter any tags that will not be affected when importing bibliographic records
Classification Scheme	Select the classification scheme for the bibliographic records to inherit upon import completion.
Call Number Source 1	Enter a first priority for mapping MARC fields and subfields into OLE item's call number fields.
Call Number Source 2	Enter a second priority for mapping MARC fields and subfields into OLE item's call number fields.
Call Number Source 3	Enter a third priority for mapping MARC fields and subfields into OLE item's call number fields.




---

# Chapter 8. Configuration Administrative Documents

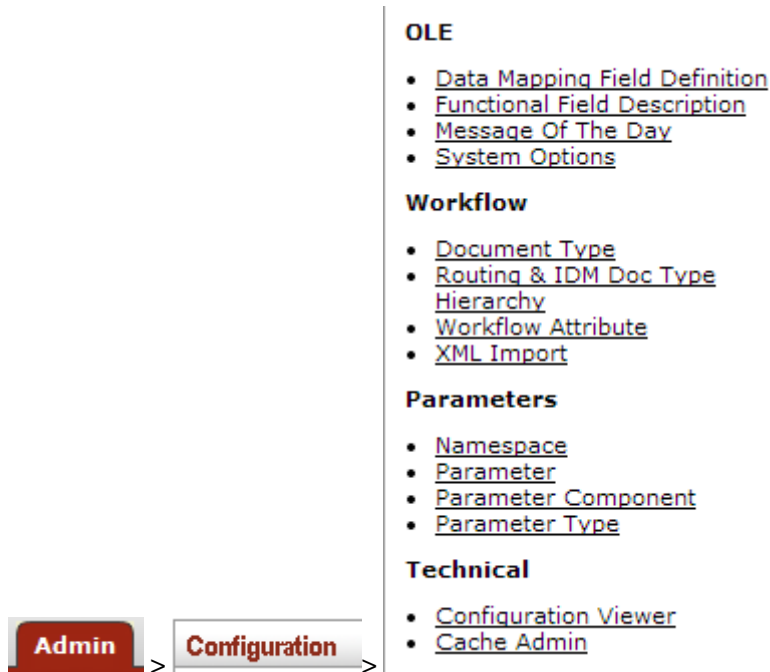


The Configuration submenu allows you to perform a variety of functional and technical activities that affect the entire system.

## OLE

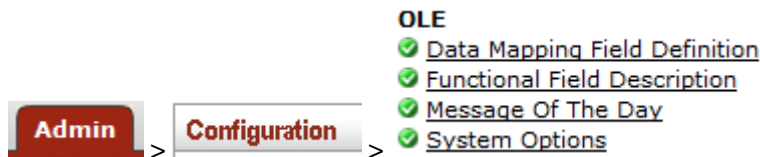

The OLE configuration submenu group provides access to high-level configuration options available to functional users. These include functions that allow authorized users to maintain the message of the day and various parameters and business rules, define many high-level definitions of a fiscal year, and perform other functions that affect users and transactions throughout the system. Some functions are only lookups, such as the ability to view data mapping fields and others are inquire screens like the Routing & Identity Management Document Type Hierarchy.

## Data Mapping Field Definition



The Data Mapping Field Definition lookup displays definitions related to a given field in OLE. This information includes definitions such as the functional field description, the length of the field, whether or not it is encrypted, and the name of the field at the database level

## Note

This data can only be updated by a technical resource and many of the values here are only meaningful to a technical user.

## Document Layout


**Data Mapping Field Definition Lookup** ?




---

<b>* Namespace:</b>	<input type="text"/>
<b>* Component:</b>	<input type="text"/>
<b>Field:</b>	<input type="text"/>
<b>Description:</b>	<input type="text"/>
<b>Database Table Name:</b>	<input type="text"/>
<b>Database Field Name:</b>	<input type="text"/>

### Data Mapping Field Definition Lookup definition

Title	Description
Namespace	Required. Select the namespace (large functional category) associated with the field you wish to search for.
Component	Required. Enter or search for and return the component (more specific functional category, such as a given screen or document section) associated with the field you wish to search for.
Field	Optional. Enter the field name of the field you wish to search for or use the lookup to search for it.
Description	Optional. Search for a field by its description. Remember that wildcards can be used, such as *account* to return all fields with the word 'account' in their description.
Database Table Name	Optional. Enter the name of the table in which the field you're searching for resides.
Database Field Name	Optional. Enter the name that identifies the field in the database.

**Data Mapping Field Definition Lookup** 


<b>* Namespace:</b>	OLE-COA - Chart of Accounts
<b>* Component:</b>	Account 
<b>Field:</b>	Account Number 
<b>Description:</b>	<input type="text"/> 
<b>Database Table Name:</b>	<input type="text"/>
<b>Database Field Name:</b>	<input type="text"/>
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

One item retrieved.

Namespace	Component	Field	Description	Database Table
OLE-COA	Account	<a href="#">Account Number</a>	Identifier for a pool of funds assigned to a specific university entit...	CA_ACCOUNT_T

The results display the namespace, component, field name, description and database field name and table name. Click on the linked field name to view the inquiry which contains additional data fields.

**Data Mapping Field Definition Inquiry**



<b>Namespace:</b>	OLE-COA - Chart of Accounts	<b>Component:</b>	Account
<b>Field:</b>	Account Number	<b>Description:</b>	Identifier for a pool of funds assigned to a specific university entit...
<b>Database Table Name:</b>	CA_ACCOUNT_T	<b>Database Field Name:</b>	ACCOUNT_NUMBER
<b>Database Data Type:</b>	VARCHAR2	<b>Application Data Type:</b>	String
<b>Database Defined Length:</b>	7	<b>Application Defined Length:</b>	7
<b>Decimal Places:</b>	0	<b>Reference Component:</b>	
<b>Required:</b>	Yes	<b>Validation Pattern:</b>	AlphaNum[0-9]{7}
<b>Encrypted:</b>	No	<b>Mask Pattern:</b>	Unknown

**Data Mapping Field Definition Inquiry**

Fields appearing on the inquiry and not previously described above are detailed here.


**Data Mapping Field Definition Inquiry definition**

Title	Description
Database Data Type	The type of data expected for this field by the database.
Application Data Type	The type of data the application expects in this field.
Database Defined Length	The maximum character length of the field in the database.

Configuration  
Administrative Documents

Application Defined Length	The maximum character length of the field in the application.
Decimal Places	The number of decimal places supported by this field.
Reference Component	OLE component where this field originates. For example, an account number field has a reference component of 'account' indicating it is defined on the Account document.
Required	Indicates if the field must be completed for this particular component.
Validation Pattern	The technical pattern used to determine if the data in the field is valid.
Encrypted	Indicates if the field is encrypted at the database level.
Mask Pattern	If a field is masked (its content partially or fully obscured to unauthorized users) this field defines the type of masking used.

## Functional Field Description



The Functional Field Description document is used to maintain descriptions for various fields throughout the application. Note that these values are for data mapping purposes only and cannot actually be viewed elsewhere in the application.

This document can only be initiated by members of OLE-SYS Manager role and does not route for approval. You can only edit existing field descriptions (by choosing 'edit' from the lookup). Creating new values requires technical assistance.

## Document Layout

Functional Field Description ?

**Doc Nbr:** 3282  
**Initiator:** amd

**Document Overview** ▼ hide

<b>* Description:</b> <input type="text"/>	<b>Explanation:</b> <input type="text"/>
<b>Org. Doc. #:</b> <input type="text"/>	

**Functional Field Description** ▼ hide

<b>New</b>	
<b>Namespace:</b> <input type="text"/>	<b>Component:</b> <input type="text"/>
<b>Field:</b> <input type="text"/>	
<b>* Description:</b>	<input style="width: 100%; height: 40px;" type="text"/>
<b>Active Indicator:</b>	<input checked="" type="checkbox"/>

**Notes and Attachments (0)** ▶ show

**Ad Hoc Recipients** ▶ show


**Route Log** ▶ show

The Functional Field Description document contains the Functional Field Description tab.

### Functional Field Description tab definition

Title	Description
Namespace	Display only. The namespace (large functional category) associated with the field you wish to edit the description for.
Component	Display only. The component (more specific functional category, such as a given screen or document section) associated with the field you wish to edit the description for.
Field	Display only. The field name of the field you wish to edit the description for.
Description	Required. Enter the description you wish to associate with this field.
Active Indicator	Required. Leave checked if you wish this functional description to be active. Uncheck the box if you wish to inactivate the description. Since these are not viewable elsewhere in the application inactivation will have no apparent effect.


## Message Of The Day



The Message of the Day document updates a message that appears OLE portal. It is an easy way to share information with OLE users and can be updated at any time.

### Note

Only members of OLE-SYS Manager role can create or edit Message of the Day documents.

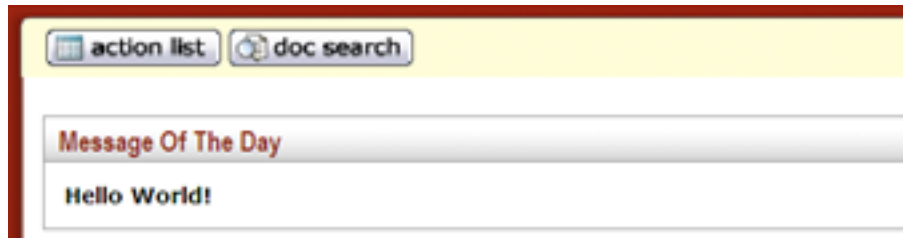

## Document Layout

**Message Of The Day** ?
Doc Nbr: 3

Initiator: a

---

Document Overview
▼ hide

**Document Overview**

**\* Description:**

**Org. Doc. #:**

**Explanation:**

Edit Message Of The Day
▼ hide

**New**

**\* Financial System Origination Code:**

**Message Of The Day:**

Notes and Attachments (0)
▶ show

Ad Hoc Recipients
▶ show

Route Log
▶ show

submit
save
blanket approve
close
cancel


### Edit Message Of The Day Tab

The Message of the Day document contains the **Edit Message of the Day** tab.

#### Edit Message of the Day tab definition

Title	Description
Financial System Origination Code	Required. Enter the code that identifies the instance of OLE in which you want the message to appear.
Message of the Day	Optional. Enter the text you want OLE users to see as the message of the day.

## System Options



The System Options document defines many high-level definitions of a fiscal year, including balance types, object types and the university chart level. It also contains values that have an impact on how sufficient funds checking works for a given fiscal year.

### Note

Only members of OLE-SYS Manager role can create or edit System Options documents. These documents do not route for approval.

## Tip

When you are configuring object types, it is important to cross reference the Object Type Table, System Options Table and the OBJECT\_TYPES parameters in the Parameter Table.

## Document Layout

System Options		Doc Nbr: 3
		Initiator: a

Document Overview

* Description:	<input type="text"/>	Explanation:	<input type="text"/>
Org. Doc. #:	<input type="text"/>		

Edit System Options

New

* Fiscal Year:	<input type="text"/>
* Fiscal Year Name:	<input type="text"/>
* Fiscal Year Start Year:	<input type="text"/>
* Fiscal Year Start Month:	<input type="text"/>
* Beginning Balances Loaded Indicator:	<input type="checkbox"/>
* Budget Checking Options Code:	<input type="checkbox"/>
* Chart Code:	<input type="text"/>
* Actual Balance Type:	<input type="text"/>
* Budget Checking Balance Type:	<input type="text"/>
* External Encumbrance Balance Type:	<input type="text"/>
* Internal Encumbrance Balance Type:	<input type="text"/>
* Pre-Encumbrance Balance Type:	<input type="text"/>
* Eliminations Balance Type:	<input type="text"/>
* Expenditure/Expense Object Type:	<input type="text"/>
* Expenditure Not Expense Object Type:	<input type="text"/>
* Expense Not Expenditure Object Type:	<input type="text"/>
* Income/Cash Object Type:	<input type="text"/>
* Income Not Cash Object Type:	<input type="text"/>
* Cash Not Income Object Type:	<input type="text"/>
* Assets Object Type:	<input type="text"/>
* Liabilities Object Type:	<input type="text"/>
* Fund Balance Object Type:	<input type="text"/>
* Cost Share Encumbrance Balance Type:	<input type="text"/>
* Base Budget Balance Type:	<input type="text"/>
* Monthly Budget Balance Type:	<input type="text"/>
* Transfer In Object Type:	<input type="text"/>
* Transfer Out Object Type:	<input type="text"/>
* Nominal Closing Balances Balance Type:	<input type="text"/>

Notes and Attachments (0)













Ad Hoc Recipients

Route Log

## Edit System Options Tab











The System Options document includes the **Edit System Options** tab.

### Edit System Options tab definition

Title	Description
Fiscal Year	Required. Enter the fiscal year for which values are being defined.
Fiscal Year Name	Required. Enter the descriptive name of the fiscal year.
Fiscal Year Start Year	Required. Enter the calendar year when the fiscal year begins.
Fiscal Year Start Month	Required. Enter the calendar month when the fiscal year begins
Fiscal Year	Required. Enter the fiscal year for which values are being defined.
Beginning Balances Loaded Indicator	Optional. Select the check box if the beginning balances for the fiscal year have been loaded. If beginning balances have not been loaded then cash level sufficient funds checking must check both the previous and current fiscal years. Clear the check box if the beginning balances for the fiscal year have not been loaded.
Budget Checking Options Code	Required. Select the check box if sufficient funds checking is enabled for the fiscal year. Clear the check box if it is not.
Chart Code	Required. Enter the university level chart code defined for the fiscal year, or search for it from the <b>Chart</b> lookup  .
Actual Balance Type	Required. Enter the balance type used to identify Actuals in the fiscal year, or search for it from the <b>Balance Type</b> lookup  .
Budget Checking Balance Type	Required. Enter the balance type used to identify Budget Checking in the fiscal year, or search for it from the <b>Balance Type</b> lookup  .
External Encumbrance Balance Type	Required. Enter the balance type used to identify External Encumbrances in the fiscal year, or search for it from the <b>Balance Type</b> lookup  .
Internal Encumbrance Balance Type	Required. Enter the balance type used to identify Internal Encumbrances in the fiscal year, or search for it from the <b>Balance Type</b> lookup  .
Pre-Encumbrance Balance Type	Required. Enter the balance type used to identify Pre-Encumbrances in the fiscal year, or search for it from the <b>Balance Type</b> lookup  .
Eliminations Balance Type	Required. Enter the balance type used to identify Eliminations in the fiscal year, or search for it from the <b>Balance Type</b> lookup  .
Expenditure/Expense Object Type	Required. Enter the object type used to identify the Expenditure/Expense category in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Expenditure Not Expense Object Type	Required. Enter the object Type used to identify the Expenditure Not Expense category in this fiscal year, or search for it from the <b>Object Type</b> lookup  .
Expense Not Expenditure Object Type	Required. Enter the object Type used to identify the Expense Not Expenditure category in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Income/Cash Object Type	Required. Enter the object Type used to identify the Income/Cash category in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Income Not Cash Object Type	Required. Enter the object type used to identify the Income Not Cash category in the fiscal year, or search for it from the <b>Object Type</b> lookup  .



## Configuration Administrative Documents

Cash Not Income Object Type	Required. Enter the object type used to identify the Cash Not Income category in the fiscal year or search for it from the <b>Object Type</b> lookup 
Assets Object Type	Required. Enter the object type used to identify the Asset category in the fiscal year, or search for it from the <b>Object Type</b> lookup 
Liabilities Object Type	Required. Enter the object type used to identify the Liabilities category in the fiscal year, or search for it from the <b>Object Type</b> lookup 
Fund Balance Object Type	Required. Enter the object type used to identify the Fund Balance category in the fiscal year, or search for it from the <b>Object Type</b> lookup 
Cost Share Encumbrance Balance Object Type	Required. Enter the object type used to identify cost share encumbrances in the fiscal year, or search for it from the <b>Object Type</b> lookup 
Base Budget Balance Type	Required. Enter the object type used to identify Base Budget in the fiscal year, or search for it from the <b>Object Type</b> lookup 
Monthly Budget Balance Type	Required. Enter the object type used to Monthly Budget in the fiscal year, or search for it from the <b>Object Type</b> lookup 
Transfer In Object Type	Required. Enter the object type used to identify Transfer In transactions in the fiscal year, or search for it from the <b>Object Type</b> lookup 
Transfer Out Object Type	Required. Enter the object type used to identify Transfer Out transactions in the fiscal year, or search for it from the <b>Object Type</b> lookup 
Nominal Closing Balances Balance Type	Required. Enter the object type used to identify Nominal Balance closing entries in the fiscal year, or search for it from the <b>Object Type</b> lookup 

## Workflow

**Workflow**

- [Document Type](#)
- [Routing & IDM Doc Type Hierarchy](#)
- [Workflow Attribute](#)
- [XML Import](#)

**Admin** > **Configuration** >

The options in this submenu group are used primarily by technical users to upload and configure data to maintain the Quali Enterprise Workflow (KEW) system. Because these two options are intended for technical users, they will not be dealt with in detail here.

Use of these options is restricted to users with the KR-SYS Technical Administrator role.

## Document Type

**Admin** > **Configuration** > **Workflow** > • [Document Type](#) >

**Document Type Lookup** > **Document Type**

The Document Type document defines basic information about the document types that exist in OLE. It also defines document types specific to workflow and KIM. Many definitions of a document type not defined here are included in its workflow process definition and the data dictionary (a technical resource). The workflow process definition for a document type can be viewed using the Document Type lookup.

## Note

For more information about workflow, see the [OLE Workflow Overview and Key Concepts](#) wiki page.

Document Type documents can only be created by members of OLE-SYS Manager or KR-SYS Technical Administrator roles and they do not route for approval.

## Document Layout

The screenshot displays the 'Document Type' configuration interface. At the top, there is a header bar with 'Document Type' and a help icon, and a table with 'Doc Nbr: 3' and 'Initiator: a'. Below this are several expandable sections:

- Document Overview** (hide): Contains fields for '\* Description:', 'Org. Doc. #:', and 'Explanation:'.
- Edit Document Type** (hide): Contains fields for 'Parent Name:' (with a search icon), '\* Name:', 'Document Handler URL:', 'Notification From Address:', and 'Active Indicator:' (checked).
- Fields Available for Retroactive Application** (hide): Contains fields for 'Label:', 'Description:', 'Help Definition URL:', and 'Apply Label Change Retroactively:' (unchecked).
- Notes and Attachments (0)** (show)
- Ad Hoc Recipients** (show)
- Route Log** (show)

At the bottom of the interface are four buttons: 'submit', 'save', 'close', and 'cancel'.

The Document Type document contains the **Edit Document Type** tab and the **Fields Available for Retroactive Application** tab.

## Edit Document Type Tab

**Edit Document Type**
▼ hide

**New**

<b>Parent Name:</b>	<input type="text" value=""/>
<b>* Name:</b>	<input type="text" value=""/>
<b>Document Handler URL:</b>	<input type="text" value=""/>
<b>Notification From Address:</b>	<input type="text" value=""/>
<b>Active Indicator:</b>	<input checked="" type="checkbox"/>

### Edit Document Type tab definition

Title	Description
Parent Name	<p>Required. Every document type must answer to another document type in a parent/child relationship. Use the lookup to search for the document type to which this document type will answer.</p> <p>Document types can inherit important definitions from their parent document types, including permissions and responsibilities.</p>
Name	<p>Required. The common name of the document type. For most OLE documents the name is a four-character abbreviation. Note that while the name field can support longer names (and KEW and KIM documents are examples of these) the Labor Ledger and General Ledger can only support document names up to four characters in length. If you are creating a new document type that will eventually populate the ledgers be sure to abide by this four character convention.</p>
Document Handler URL	<p>Optional. (Technical) Identifies the basic URL that will take a user to this document type.</p>
Notification From Address	<p>Optional. The email address that will appear as the 'From' address on any action list notifications sent by workflow for this document type. This allows several applications using workflow to maintain separate notification email addresses.</p>
Active	<p>Required. The box should be checked if the document type is active and available for use. Uncheck the box to inactivate the document type. Note that you cannot post labor or General Ledger OLE entries with inactive document types.</p>

## Fields Available for Retroactive Application Tab

These are Document Type definitions that can be edited retroactively if need be. This means that should you decide to change one of these values for a given document type it is possible to apply the change retroactively to any documents of this type already created. For example, if you decided to change the Label of the Budget Adjustment document type you could choose to have that label change apply to historical Budget Adjustment documents in your OLE system.

**Fields Available for Retroactive Application** ▼ hide

<b>New</b>	
<b>Label:</b>	<input style="width: 90%;" type="text"/>
<b>Description:</b>	<input style="width: 90%; height: 40px;" type="text"/>
<b>Help Definition URL:</b>	<input style="width: 90%;" type="text"/>
<b>Apply Label Change Retroactively:</b>	<input type="checkbox"/>

**Fields Available for Retroactive Application tab definition**

Title	Description
Label	The Label appears in most places where document types are displayed in results (including the action list and document search screens) and is commonly longer than the document Name, which is often an abbreviation.
Description	Optional. A text description of this document type.
Help Definition URL	Optional. (Technical) Identifies the URL where the online help content for this document type resides.
Apply Label Change Retroactively	Optional. Check this box only when updating an existing document type and only if you wish the fields on this tab to be updated on previously created versions of documents of this type.

**Document Type Inquiry**

The Document Type Inquiry contains some additional fields that are not defined on this document but referenced from their source (either the corresponding workflow process definition or data dictionary information). These fields are defined below.

**Document Type Inquiry**

**Document Type** ▼ hide

<b>Parent Id:</b>	<u>3029</u>
<b>Parent Name:</b>	<u>OLEFinancialProcessingSimpleMaintenanceDocument</u>
<b>Id:</b>	<u>3127</u>
<b>Name:</b>	OLE_DVWT
<b>Label:</b>	Disbursement Voucher Wire Charge
<b>Description:</b>	
<b>Document Handler URL:</b>	\${ole.url}/kr/maintenance.do?methodToCall=docHandler (
<b>Help Definition URL:</b>	default.htm?turl=WordDocuments%2Fdisbursementvouche
<b>Document Search Help URL:</b>	
<b>Post Processor Class:</b>	org.kuali.ole.sys.document.workflow.PostProcessor (Inheri
<b>Notification From Address:</b>	
<b>Application ID:</b>	OLE (Inherited from Parent)
<b>Active Indicator:</b>	Yes

export
close


**Document Type Inquiry definition**

Title	Description

Configuration  
Administrative Documents

Parent ID	Display only. The unique, system-generated ID number that identifies the parent document of this Document Type.
ID	Display only. The unique, system-generated ID number that identifies this document type.
Post Processor Class	Display only. (Technical.) Identifies the post processor this document type calls upon reaching a completed workflow status (usually 'Final' or 'Processed'). The post processor is the code that tells OLE what tables to update when a document is approved.
Application ID	Display only. The namespace (large functional category) that is associated with this document type.

## Routing & Identity Management Document Type Hierarchy



This special view combines KIM data with OLE Document Type Hierarchy. It visually displays the parent and child relationships between OLE document types and the route nodes that are associated with each. Users may also choose to view detailed configuration for each document type, including all KIM permissions and responsibilities related to that document.

Users who are authorized to edit document types, permissions and responsibilities may access these options directly via this screen.

### Document Hierarchy View

When you access the Routing & Identity Management Document Type Hierarchy screen, the system initially displays the document hierarchy itself. Document types are indented under their parent document types.

<b>OpenLibraryEnvironmentTransactionalDocument</b>	<a href="#">Edit Document Type</a>	<a href="#">View D</a>
<b>FinancialProcessingTransactionalDocument</b> (OLEFinancialProcessingTransactionalDocument)	<a href="#">Edit Document Type</a>	<a href="#">View</a>
<b>Advance Deposit (OLE AD)</b>	<a href="#">Edit Document Type</a>	<a href="#">View</a>
<b>Auxiliary Voucher (OLE AV)</b>	<a href="#">Edit Document Type</a>	<a href="#">View</a>
Account		
AccountingOrganizationHierarchy		
<b>Budget Adjustment (OLE BA)</b>	<a href="#">Edit Document Type</a>	<a href="#">View</a>
Account		
AccountingOrganizationHierarchy		
Award		
BudgetAdjustment		
SubFund		
<b>Cash Management (OLE CMD)</b>	<a href="#">Edit Document Type</a>	<a href="#">View</a>
<b>Cash Receipt (OLE CR)</b>	<a href="#">Edit Document Type</a>	<a href="#">View</a>
CashManagement		

To display the Document Type Inquiry for a document, click the document type name.

Users with permissions to edit document types will see an extra link displayed for each type. To initiate an OLE Document Type Maintenance document to edit a document type, click the **Edit Document Type** link for it.

If a given document type does workflow routing, then the system displays the route nodes associated with this type directly below the name of the document. Route nodes are listed in the order in which this document passes through them. Document types with branching routing logic may have further indentation displaying route nodes that a document may only pass through under certain conditions.

<b>Disbursement Voucher (DV)</b>
<b>Purchasing</b>
<b>Account</b>
<b>AccountingOrganizationHierarchy</b>
<b>Tax</b>
<b>Campus</b>
<b>Travel</b>
<b>PaymentMethod</b>
<b>Award</b>

## Document Configuration View

To open a separate window displaying additional information about a document type, click the **View Document Configuration** link.

## Configuration Administrative Documents

### Document Configuration - OLE\_OBJT

#### Document Information ▼ hide

<b>Name</b>	OLE_OBJT	<a href="#">Edit Document Type</a>	<b>Doc Handler URL</b>	
<b>Label</b>	Object Code		<b>Help URL</b>	default.htm?url=WordDocuments%2Fobjectcode.htm
<b>Parent Name</b>	OLEChartComplexMaintenanceDocument		<b>Child Document Types</b>	

#### Permissions ▼ hide

Gray lines that are stricken through represent inherited permissions that have been overridden by a more specific permission.

##### ▼ hide Defined For This Document

Template Name	Permission Name	Detail Values	Granted to Roles
<b>Inherited From: OLEChartComplexMaintenanceDocument</b>			
Template Name	Permission Name	Detail Values	Granted to Roles
<a href="#">Initiate Document (KR-SYS)</a>	<a href="#">Initiate Document (Complex COA) (OLE-SELECT)</a>		<a href="#">OLE-SELECT Financial-AQ4</a> <a href="#">OLE-SELECT Accounting-AQ4</a> <a href="#">OLE-SELECT OLE User</a> <a href="#">OLE-SYS User</a> <a href="#">OLE-SELECT Financial-AQ5</a>
<a href="#">Edit Document (KR-NS)</a>	<a href="#">Edit Document (Complex COA) (OLE-SELECT)</a>	Route Node Name = AdHoc Route Status Code = R	<a href="#">OLE-SELECT Financial-AQ4</a> <a href="#">OLE-SELECT Accounting-AQ4</a> <a href="#">KR-WKFLW Approve Request Recipient</a> <a href="#">OLE-SELECT Financial-AQ5</a>

##### ▼ hide Inherited From: OpenLibraryEnvironmentComplexMaintenanceDocument

Template Name	Permission Name	Detail Values	Granted to Roles
<a href="#">Edit Document (KR-NS)</a>	<a href="#">Edit Document KFSM AdHoc R (OLE-SYS)</a>	Route Node Name = AdHoc Route Status Code = R	<a href="#">KR-WKFLW Approve Request Recipient</a>

##### ▼ hide Inherited From: OLE

Template Name	Permission Name	Detail Values	Granted to Roles
<a href="#">Administer Routing for Document (KR-WKFLW)</a>	<a href="#">Administer Routing for Document KFS (OLE-SYS)</a>		<a href="#">OLE-SYS Workflow Administrator</a>
<a href="#">Blanket Approve Document (KR-WKFLW)</a>	<a href="#">Blanket Approve Document KFS (OLE-SYS)</a>		<a href="#">OLE-SYS Manager</a>
<a href="#">Initiate Document (KR-SYS)</a>	<a href="#">Initiate Document KFS (OLE-SYS)</a>	-	<a href="#">OLE-SYS User</a>
<a href="#">Open Document (KR-NS)</a>	<a href="#">Open Document KFS (OLE-SYS)</a>		<a href="#">KR-WKFLW Initiator or Reviewer</a> <a href="#">OLE-SYS User</a>
<a href="#">Save Document (KR-WKFLW)</a>	<a href="#">Save Document KFS (OLE-SYS)</a>		<a href="#">OLE-SYS System User</a> <a href="#">KR-NS Document Editor</a>
<a href="#">Delete Note / Attachment (KR-NS)</a>	<a href="#">Delete Note / Attachment OLE FALSE (OLE-SYS)</a>	Created By Self Only = FALSE	<a href="#">OLE-SYS Manager</a>
<a href="#">Ad Hoc Review Document (KR-WKFLW)</a>	<a href="#">Ad Hoc Review Document KFS A (OLE-SYS)</a>	Action Request Code = A	<a href="#">OLE-SYS User</a>
<a href="#">Ad Hoc Review Document (KR-WKFLW)</a>	<a href="#">Ad Hoc Review Document KFS F (OLE-SYS)</a>	Action Request Code = F	<a href="#">OLE-SYS Active Faculty or Staff</a> <a href="#">OLE-SYS User</a>
<a href="#">Ad Hoc Review Document (KR-WKFLW)</a>	<a href="#">Ad Hoc Review Document KFS K (OLE-SYS)</a>	Action Request Code = K	<a href="#">OLE-SYS Active Faculty or Staff</a> <a href="#">OLE-SYS User</a>
<a href="#">Copy Document (KR-NS)</a>	<a href="#">Copy Document KFS (OLE-SYS)</a>		<a href="#">KR-SYS Document Initiator</a>
<a href="#">Add Message to Route Log (KR-WKFLW)</a>	<a href="#">Add Message to Route Log KFS (OLE-SYS)</a>		<a href="#">KR-WKFLW Initiator or Reviewer</a>
<a href="#">Recall Document (KR-WKFLW)</a>	<a href="#">Recall Document OLE (OLE-SYS)</a>		
<a href="#">Super User Approve Single Action Request (KR-WKFLW)</a>	<a href="#">Super User Approve Single Action Request OLE (OLE-SYS)</a>		
<a href="#">Super User Approve Document (KR-WKFLW)</a>	<a href="#">Super User Approve Document OLE (OLE-SYS)</a>		
<a href="#">Super User Disapprove Document (KR-WKFLW)</a>	<a href="#">Super User Disapprove Document OLE (OLE-SYS)</a>		
<a href="#">Open Document (KR-NS)</a>	<a href="#">Open Document (OLE-SELECT)</a>	-	<a href="#">OLE-SELECT OLE User</a>
<a href="#">Initiate Document (KR-SYS)</a>	<a href="#">Initiate OLE Documents (OLE-SELECT)</a>	-	<a href="#">OLE-SELECT OLE User</a>

##### ▼ hide Inherited From: KualIDocument

Template Name	Permission Name	Detail Values	Granted to Roles
<a href="#">Cancel Document (KR-WKFLW)</a>	<a href="#">Cancel Document (KUALI)</a>	Route Node Name = PreRoute	<a href="#">KR-WKFLW Initiator or Reviewer</a> <a href="#">KR-NS Document Editor</a>
<a href="#">Route Document (KR-WKFLW)</a>	<a href="#">Route Document (KUALI)</a>		<a href="#">OLE-SYS System User</a> <a href="#">KR-NS Document Editor</a>
<a href="#">Edit Document (KR-NS)</a>	<a href="#">Edit KualI ENROUTE Document Node Name PreRoute (KUALI)</a>	Route Node Name = PreRoute	<a href="#">KR-WKFLW Initiator</a>
<a href="#">Edit Document (KR-NS)</a>	<a href="#">Edit KualI ENROUTE Document Route Status Code R (KUALI)</a>	Route Status Code = R	<a href="#">KR-WKFLW Non-Ad Hoc Approve Request Recipient</a> <a href="#">KR-WKFLW Approve Request Recipient</a>
<a href="#">Add Note / Attachment (KR-NS)</a>	<a href="#">Add Note / Attachment KualI Document (KUALI)</a>		<a href="#">KR-WKFLW Initiator or Reviewer</a>
<a href="#">View Note / Attachment (KR-NS)</a>	<a href="#">View Note / Attachment KualI Document (KUALI)</a>		<a href="#">KR-NS Document Opener</a>
<a href="#">Send Ad Hoc Request (KR-NS)</a>	<a href="#">Send FYI Request KualI Document (KR-SYS)</a>	Action Request Code = F	<a href="#">KR-NS Document Opener</a>
<a href="#">Send Ad Hoc Request (KR-NS)</a>	<a href="#">Send Acknowledge Request KualI Document (KR-SYS)</a>	Action Request Code = K	<a href="#">KR-NS Document Opener</a>
<a href="#">Send Ad Hoc Request (KR-NS)</a>	<a href="#">Send Approve Request KualI Document (KR-SYS)</a>	Action Request Code = A	<a href="#">KR-NS Document Editor</a> <a href="#">KR-WKFLW Approve Request Recipient</a>
<a href="#">Add Message to Route Log (KR-WKFLW)</a>	<a href="#">Add Message to Route Log (KUALI)</a>	-	-
<a href="#">Send Ad Hoc Request (KR-NS)</a>	<a href="#">Send Complete Request KualI Document (KR-SYS)</a>	Action Request Code = C	<a href="#">KR-NS Document Opener</a>

#### Workflow / Responsibilities ▼ hide

Gray lines that are stricken through represent inherited responsibilities that have been overridden by a more specific responsibilities.

##### Exception Routing

Required	Action Details At Role Member Level	Granted to Roles	Inherited
No	No	<a href="#">OLE-SYS Manager</a>	<a href="#">OLE</a>

##### Route Node: OrganizationHierarchy

Required	Action Details At Role Member Level	Granted to Roles	Inherited
No	Yes	<a href="#">OLE-SYS Organization Reviewer</a>	<a href="#">OLE</a>

##### Route Node: Chart

This view includes **Document Information**, **Permissions** and **Workflow / Responsibilities** tabs.

## Document Information Tab

This tab provides basic information about the document type. Much of the information here is identical to that available in the Document Type Inquiry.

Document Information <span style="float: right;">▼ hide</span>			
<b>Name</b>	<a href="#">OLE_OBJT</a> <a href="#">Edit Document Type</a>	<b>Doc Handler URL</b>	
<b>Label</b>	Object Code	<b>Help URL</b>	default.htm?url=WordDocum
<b>Parent Name</b>	<a href="#">OLEChartComplexMaintenanceDocument</a>	<b>Child Document Types</b>	

### Document Information tab definition

Title	Description
Name	The name that uniquely identifies this type of document.  If the user viewing the Configuration screen has permission to edit document type maintenance documents, the system also displays the <b>Edit Document Type</b> link.
Label	A longer, more descriptive name for this type of document. In some cases the name and the label may be identical.
Parent Name	The type of document that is the parent to (i.e., higher than) this document type in the document type hierarchy. To display the Document Configuration view for the parent document type, click the linked parent name.
Doc Handler URL	The URL for the document handler associated with this document type. This information is helpful for technical users.
Help URL	The URL for the online help associated with this document type.
Child Document Types	If this document type is a parent, the system displays all of its types for all of its children document types. To see the document configuration view for a child document type, click the link for the desired child document type.

## Permissions Tab

This tab identifies the KIM permissions that are invoked by this type of document. Collapsible sections indicate how the document type is associated with each permission.

The **Defined for This Document** section lists permissions that specifically refer to this document type. But many document types receive most, if not all, their associated permissions by inheriting them from parent document types. Additional tabs display this inherited information and the name of the document type from which the permissions are inherited. For example, in the screenshot below, this document type inherits permissions from both `OLEChartComplexMaintenanceDocument` and `OpenLibraryEnvironmentComplexMaintenanceDocument`.



Configuration  
Administrative Documents

Permissions <span style="float: right;">▼ hide</span>				
Gray lines that are stricken through represent inherited permissions that have been overridden by a more specific permission.				
▼ hide <b>Defined For This Document</b>				
Template Name	Permission Name	Detail Values	Granted	
▼ hide <b>Inherited From: OLEChartComplexMaintenanceDocument</b>				
Template Name	Permission Name	Detail Values	Granted	
<u>Initiate Document (KR-SYS)</u>	<u>Initiate Document (Complex COA) (OLE-SELECT)</u>		OLE-SELE OLE-SELE OLE-SELE OLE-SYS OLE-SELE	
<u>Edit Document (KR-NS)</u>	<u>Edit Document (Complex COA) (OLE-SELECT)</u>	Route Node Name = AdHoc Route Status Code = R	OLE-SELE OLE-SELE KR-WKFL OLE-SELE	
▼ hide <b>Inherited From: OpenLibraryEnvironmentComplexMaintenanceDocument</b>				
Template Name	Permission Name	Detail Values	Granted	
<u>Edit Document (KR-NS)</u>	<u>Edit Document KFSM AdHoc R (OLE-SYS)</u>	Route Node Name = AdHoc Route Status Code = R	KR-WKFLW Ap	
▼ hide <b>Inherited From: OLE</b>				
Template Name	Permission Name	Detail Values		
<u>Administer Routing for Document (KR-WKFLW)</u>	<u>Administer Routing for Document KFS (OLE-SYS)</u>			
<u>Blanket Approve Document (KR-WKFLW)</u>	<u>Blanket Approve Document KFS (OLE-SYS)</u>			

Because more specific permissions override more general ones, some listed permissions may not apply. The system displays overridden permissions as gray strike-through text. In the example below the 'Initiate Document' permission inherited from OLE is overridden by a more specific permission displayed in **Inherited From: OLEChartComplexMaintenanceDocument** section.

▼ hide <b>Defined For This Document</b>				
Template Name	Permission Name	Detail Values	Granted	
▼ hide <b>Inherited From: OLEChartComplexMaintenanceDocument</b>				
Template Name	Permission Name	Detail Values	Granted	
<u>Initiate Document (KR-SYS)</u>	<u>Initiate Document (Complex COA) (OLE-SELECT)</u>		OLE-SELE OLE-SELE OLE-SELE OLE-SYS OLE-SELE	
<u>Edit Document (KR-NS)</u>	<u>Edit Document (Complex COA) (OLE-SELECT)</u>	Route Node Name = AdHoc Route Status Code = R	OLE-SELE OLE-SELE KR-WKFL OLE-SELE	
▼ hide <b>Inherited From: OpenLibraryEnvironmentComplexMaintenanceDocument</b>				
Template Name	Permission Name	Detail Values	Granted	
<u>Edit Document (KR-NS)</u>	<u>Edit Document KFSM AdHoc R (OLE-SYS)</u>	Route Node Name = AdHoc Route Status Code = R	KR-WKFLW Ap	
▼ hide <b>Inherited From: OLE</b>				
Template Name	Permission Name	Detail Values		
<u>Administer Routing for Document (KR-WKFLW)</u>	<u>Administer Routing for Document KFS (OLE-SYS)</u>			
<u>Blanket Approve Document (KR-WKFLW)</u>	<u>Blanket Approve Document KFS (OLE-SYS)</u>			
<u>Initiate Document (KR-SYS)</u>	<u>Initiate Document KFS (OLE-SYS)</u>	-		
<u>Open Document (KR-NS)</u>	<u>Open Document KFS (OLE-SYS)</u>			

**Permissions tab definition**

Title	Description
Template Name	Display only. The name of the permissions template on which this permission is based. The template often defines, in a broad sense, what the permission controls. Similar types of permissions have the same template.

Configuration  
Administrative Documents

Permission Name	<p>Display only. The name of this permission. In most cases the permission name is the same as the associated template name.</p> <p style="text-align: center;"><b>Note</b></p> <p>Permission names are generally not unique because they describe types of authorization that may appear in many places throughout the application.</p>
Detail Values	Display only. Additional detailed information that, when taken with the permission name, defines the permission's function.
Granted to Roles	Display only. The roles (i.e., the namespace and name of each role) associated with this permission. In some cases multiple roles may be associated with the same permission. To view the Role Inquiry, click the linked name of the desired role.

## Workflow / Responsibilities Tab

This tab identifies the route nodes associated with this document type and displays critical information about the KIM responsibilities associated with them.

On this tab, the system displays route nodes in the order in which the document passes through them. The system also displays responsibility information for the Exception Routing node that will be invoked for this document type only if the document encounters an error that prevents it from completing its normal routing.

Workflow / Responsibilities <span style="float: right;">▼ hide</span>				
Gray lines that are stricken through represent inherited responsibilities that have been overridden by a more specific responsibilities.				
<b>Exception Routing</b>				
	Required	Action Details At Role Member Level	Granted to Roles	Inherited
	No	No	<a href="#">OLE-SYS Manager</a>	<a href="#">OLE</a>
<b>Route Node: Account</b>				
	Required	Action Details At Role Member Level	Granted to Roles	Inherited
	Yes	No	<a href="#">OLE-SYS Fiscal Officer</a> <a href="#">OLE-SYS Account Supervisor</a>	No
	Yes	No	<a href="#">OLE-SYS Fiscal Officer</a>	<a href="#">OLE</a>
<b>Route Node: Organization Hierarchy</b>				
	Required	Action Details At Role Member Level	Granted to Roles	Inherited
	No	Yes	<a href="#">OLE-SYS Organization Reviewer</a>	<a href="#">OLE</a>
<b>Route Node: SubFund</b>				
	Required	Action Details At Role Member Level	Granted to Roles	Inherited
	No	Yes	<a href="#">OLE-SYS Sub-Fund Reviewer</a>	<a href="#">OLE</a>
<b>Route Node: Award</b>				
	Required	Action Details At Role Member Level	Granted to Roles	Inherited
	No	No		<a href="#">OLE</a>
<b>Route Node: Chart</b>				
	Required	Action Details At Role Member Level	Granted to Roles	Inherited
	Yes	No	<a href="#">OLE-SYS University Chart Manager</a> <a href="#">OLE-SYS Chart Manager</a>	<a href="#">OLE</a>
<b>Split Node: HasDepositAccount</b>				
<b>Route Node: DepositAccount</b>				
	Required	Action Details At Role Member Level	Granted to Roles	Inherited
	No	No	<a href="#">OLE-SELECT OLE Prepayment</a>	No

Responsibility information is presented for each route node in a standard format.

### Workflow / Responsibilities tab definition

Configuration  
Administrative Documents

Title	Description
Required	Display only. A Yes or No value that indicates whether this responsibility must generate action requests for this document type. If the value is 'Yes' and the document generates no requests associated with this responsibility, then the document goes into exception status. If the value is 'No' and the responsibility generates no action requests, the document continues to route as normal.
Action Details at Role Member Level	Display only. A Yes or No value that indicates where the details of this workflow action request are defined. If the value is 'Yes,' the system collects action details when members are assigned to the role. If the value is 'No,' the system collects action details when this responsibility is assigned to a role.
Granted to Roles	Display only. The roles (that is, the namespace and name of each role) associated with the responsibility at this route node. To view the Role Inquiry, click the linked name of the desired role.
Inherited	Display only. Indicates whether this responsibility is inherited from another document type. If the value is 'No,' the responsibility is specifically associated with this document type. If a document type name appears here, the responsibility is inherited from the specified document type. To view the Document Configuration Inquiry for this document type, Click the linked name.

## Workflow Attribute

Admin > 
 Configuration > 
 Workflow > 
 • Workflow Attribute > 
 Rule Attribute Lookup

The Rule Definition Lookup allows you to search for and report on workflow rule definitions and export the definition data in .xml format. OLE no longer uses workflow rules to route documents (handling this through KIM responsibilities instead), but rule definitions are still used by document search and the action list.

This option consists only of a lookup and inquiry screen. There is no document type associated with rule definitions.

**Rule Attribute Lookup** ?
Backdoor Id admin is in use

<b>Name:</b>	<input type="text"/>
<b>Id:</b>	<input type="text"/>
<b>Class Name:</b>	<input type="text"/>
<b>Application ID:</b>	<input type="text"/>
<b>Type:</b>	<input type="text" value=""/>

search
clear
cancel

15 items retrieved, displaying all items.

Id	Name	Class Name	Type
<a href="#">1000</a>	RuleRoutingAttribute	org.kuali.rice.kew.rule.RuleRoutingAttribute	RuleAttribute
<a href="#">1003</a>	NotificationCustomActionListAttribute	org.kuali.rice.ken.kew.NotificationCustomActionListAttribute	ActionListAttribute
<a href="#">1004</a>	NotificationChannelSearchableAttribute	org.kuali.rice.kew.docsearch.xml.StandardGenericXMLSearchableAttribute	SearchableXmlAtt
<a href="#">1005</a>	NotificationPrioritySearchableAttribute	org.kuali.rice.kew.docsearch.xml.StandardGenericXMLSearchableAttribute	SearchableXmlAtt

Clicking the ID number of a given rule definition will take you to the Rule Definition Inquiry screen.

Rule Attribute <span>▼ hide</span>	
<b>Id:</b>	1000
<b>Name:</b>	RuleRoutingAttribute
<b>Label:</b>	Rule Routing Attribute
<b>Description:</b>	Rule Routing Attribute
<b>Class Name:</b>	org.kuali.rice.kew.rule.RuleRoutingAttribute
<b>Application ID:</b>	
<b>Type:</b>	Rule Attribute
<b>XML Configuration:</b>	

[export](#) [close](#)

Click the [export](#) button to download the .xml associated with a particular rule definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<data xmlns="ns:workflow" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="ns:workflow resource:WorkflowData">
  <ruleAttributes xmlns="ns:workflow/RuleAttribute" xsi:schemaLocation="
  ns:workflow/RuleAttribute resource:RuleAttribute">
    <ruleAttribute>
      <name>RuleRoutingAttribute</name>
      <className>org.kuali.rice.kew.rule.RuleRoutingAttribute</className>
      <label>Rule Routing Attribute</label>
      <description>Rule Routing Attribute</description>
      <type>RuleAttribute</type>
    </ruleAttribute>
  </ruleAttributes>
</data>
```

## XML Import

[Admin](#) > [Configuration](#) > [Workflow](#) > [XML Import](#) > [Ingester](#)

The XML Ingester allows you to upload the XML file to the KEW server. These XML files might include workflow process definition files or rule definition files.

## Ingester

XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
<input type="button" value="upload xml data"/>		


## Parameters



The options in this submenu group are used primarily by technical users to upload and configure data to maintain the Kualu Enterprise Workflow (KEW) system. Because these two options are intended for technical users, they will not be dealt with in detail here.

Use of these options is restricted to users with the KR-SYS Technical Administrator role.

## Namespace



The Namespace document allows you to add new or maintain existing namespace codes. Namespace codes are used to identify various pieces of functionality and generally correspond to large functional areas. The namespaces in OLE base data normally take the form of a Kualu application followed by one of that application's modules. For example OLE Purchasing /Accounts Payable module would be associated with the namespace OLE-PURAP.

This document can only be initiated by members of OLE-SYS Manager or KR-SYS Technical Administrator role and does not route for approval.

## Document Layout

Namespace ?		<b>Doc Nbr:</b> 3361
		<b>Initiator:</b> ole-khuntlev

**Document Overview** ▼ hide

---

**Document Overview**

<b>* Description:</b> <input type="text"/>	<b>Explanation:</b> <input type="text"/>
<b>Organization Document Number:</b> <input type="text"/>	

**Edit Namespace** ▼ hide

---

**New**

<b>* Namespace Code:</b> <input type="text"/>	<input type="text"/>
<b>* Namespace Name:</b> <input type="text"/>	<input type="text"/>
<b>Application ID:</b> <input type="text"/>	<input type="text"/>
<b>Active Indicator:</b> <input checked="" type="checkbox"/>	

**Notes and Attachments (0)** ▶ show

---

**Ad Hoc Recipients** ▶ show

---

**Route Log** ▶ show

submit save close cancel


## Edit Namespace Tab

The Namespace document contains the **Edit Namespace** tab.

### Edit Namespace tab definition

Title	Description
Namespace Code	Required. Enter the namespace code for this namespace. OLE convention for most namespaces is application abbreviation and module abbreviation separated by a dash (OLE-PURAP, KR-WKFLW, etc.)
Namespace Name	Required. A longer text description for this namespace code.
Application ID	Optional. An additional namespace identifier which identifies which application should recognize this namespace code. This is generally only used in instances where the regular namespace code is not enough to make a definition unique. This definition is normally used directly on the Parameter document and not assigned specifically to a namespace on this table.
Active Indicator	Required. Leave checked to indicate that this namespace is active and can be associated with permissions, responsibilities, roles and Quali data elements organized by namespace. Uncheck the box to inactivate this namespace and make it an invalid choice.

## Parameter



The Parameter document is used to define parameters and business rules in OLE. A specific value of a parameter can vary based on what the parameter is used to define. Some parameters create business rules. These rules create restrictions and enforce valid values and combinations on various document types or batch processes. Other parameters simply define institution-specific values not defined elsewhere in OLE. The value may, for example, be text that OLE is to display in a given location or it may be a simple yes or no value to turn an option on or off.

Only members of the KR-SYS Technical Administrator or OLE-SYS Manager role can create or edit Parameter documents.

## Document Layout

<b>Parameter Maintenance Document</b> <span style="float: right;">?</span>	<b>Doc Nbr:</b> 3363	
	<b>Initiator:</b> ole-khuntley	

Document Overview
▼ hide

<b>* Description:</b> <input style="width: 90%;" type="text"/>	<b>Explanation:</b> <div style="border: 1px solid gray; height: 40px;"></div>
<b>Organization Document Number:</b> <input style="width: 80%;" type="text"/>	

Edit Parameter
▼ hide

New

<b>* Namespace Code:</b> <input style="width: 90%;" type="text"/>	
<b>* Component:</b> <input style="width: 90%;" type="text"/>	
<b>* Application ID:</b> KUALI	
<b>* Parameter Name:</b> <input style="width: 90%;" type="text"/>	
<b>Parameter Value:</b>	<div style="border: 1px solid gray; height: 40px;"></div>
<b>* Parameter Description:</b>	<div style="border: 1px solid gray; height: 40px;"></div>
<b>* Parameter Type Code:</b> <input style="width: 80%;" type="text"/>	
<b>* Parameter Constraint Code:</b>	<input type="radio"/> Allowed <input type="radio"/> Denied

Notes and Attachments (0)
▶ show

Ad Hoc Recipients
▶ show

Route Log
▶ show

submit
save
close
cancel



### Edit Parameter Tab

The Parameter document includes the **Edit Parameter** tab. This tab is where you define the modules, type, rules, and description of the parameters.

#### Edit Parameter tab definition

Title	Description
-------	-------------

Configuration  
Administrative Documents

Namespace Code	Required. Select the appropriate Namespace code for the parameter from the <b>Namespace Code</b> list or search for it from the lookup.
Component	Required. Enter the parameter component code or search for it from the <b>Parameter Component</b> lookup  .
Application ID	Required. Enter the application namespace to identify the application to which this parameter applies. Note that the same parameter can have different values for different applications.
Parameter Name	Required. Enter the name of the parameter being defined.
Parameter Value	Required. Enter the value for the parameter. The nature of a given parameter determines what form the parameter value should take. In some cases it is text for an OLE user to view or it could be a value such as an account number or an object code. In cases where multiple values are allowed they should be separated by a semi-colon. Consult with technical resources if you are unsure what format a specific parameter value should take.
Parameter Description	Required. Describe the purpose and usage of the parameter. The description is used for a documentation purpose.
Parameter Type Code	Required. Select the parameter type code from the <b>Parameter Type</b> list or search for it from the lookup  .
	Default types include:  System Configuration: Used to establish institution values not specific to validation.  Document Validation: Used to establish business rules for documents.
Parameter Constraint Code	Required. Select Allowed if the parameter is to allow the defined parameter value within OLE application. Select <b>Denied</b> if the parameter is to deny the defined parameter value within OLE application. Consult with technical resources if you are unsure of the appropriate constraint code for a given parameter.

## Parameter Component



The Parameter Component document defines valid components that can be associated with a parameter. Parameter components indicate a general or specific piece of OLE functionality to which a parameter applies. Some Parameter Components are generic (batch, lookup, all) while others are very specific and refer to particular documents or even specific tabs or fields on documents.

Only members of the KR-SYS Technical Administrator or OLE-SYS Manager role can create or edit Parameter Component documents.



## Document Layout

<b>Component Maintenance Document</b>		<b>Doc Nbr:</b> 3365
		<b>Initiator:</b> ole-khuntlev

**Document Overview** ▼ hide

---

**Document Overview**

<b>* Description:</b> <input type="text"/>	<b>Explanation:</b> <input type="text"/>
<b>Organization Document Number:</b> <input type="text"/>	

---

**Edit Component** ▼ hide

---

**New**

<b>* Namespace Name:</b> <input type="text"/>	<input type="button" value="🔍"/>
<b>* Component:</b> <input type="text"/>	
<b>* Component Name:</b> <input type="text"/>	
<b>Active Indicator:</b> <input checked="" type="checkbox"/>	

---

**Notes and Attachments (0)** ▶ show

---

**Ad Hoc Recipients** ▶ show

---

**Route Log** ▶ show

---


## Edit Component Tab

The Parameter Component document includes the **Edit Component Type** tab.

### Edit Component tab definition

Title	Description
Namespace Name	Required. Select the appropriate Namespace code for the parameter from the Namespace Name list or search for it from the lookup.
Component	Required. Enter the parameter component code or search for it from the Parameter Component lookup
Component Name	Required. Enter the descriptive name of the parameter component being defined.
Active Indicator	Required. Leave checked to indicate that this parameter component is active and can be associated with parameters. Uncheck the box to inactivate this component and make it an invalid choice.

## Parameter Type



The parameter type broadly defines what a parameter is used for. Parameters used for document validation (such as business rules) and parameters used for System Configuration (customizing OLE for your institution) are two types of parameters used in OLE.

The Parameter Type document allows you to create new or edit existing parameter types. Code must be developed to support any additional types or changes to existing types.

Only members of the KR-SYS Technical Administrator or OLE-SYS Manager role can create or edit Parameter Type documents and they do not route for approval.

## Document Layout

The screenshot shows a web interface for editing a Parameter Type document. At the top, there is a header bar with the title "Parameter Type" and a help icon. To the right of the header, there are two fields: "Doc Nbr:" with the value "3290" and "Initiator:" with the value "amdela". Below the header, there are several tabs: "Document Overview" (with a "hide" button), "Edit Parameter Type" (with a "hide" button), "Notes and Attachments (0)" (with a "show" button), "Ad Hoc Recipients" (with a "show" button), and "Route Log" (with a "show" button). The "Edit Parameter Type" tab is currently active and contains the following fields: "\* Description:" (text input), "Org. Doc. #:" (text input), "Explanation:" (text input), "\* Parameter Type Code:" (text input), "\* Parameter Type Name:" (text input), and "Active Indicator:" (checkbox, which is checked). At the bottom of the form, there are four buttons: "submit", "save", "close", and "cancel".

## Edit Parameter Type Tab

The Parameter Type document includes the **Edit Parameter Type** tab.

### Edit Parameter Type tab definition

Title	Description
Parameter Type Code	Required. Enter the code by which this parameter type will be identified.
Parameter Type Name	Required. Enter the long descriptive name for this parameter type.
Active Indicator	Required. Check the box to make this parameter type active and available for selection when creating parameters. Uncheck the box if you wish to inactivate this type of parameter and prevent its selection when creating new parameters.


## Technical



The options in this submenu group are used primarily by technical users to upload and configure data to maintain the Kualu Enterprise Workflow (KEW) system. Because these two options are intended for technical users, they will not be dealt with in detail here.

Use of these options is restricted to users with the KR-SYS Technical Administrator role.

## Configuration Viewer



### Configured Properties:

The Configuration Viewer is used to review a table of configured properties. Click **Refresh Page** to update the values.


## Document Layout



### Configured Properties:

Config Key	Config Value
ActionList.norefresh	false
DATE_TO_STRING_FORMAT_FOR_FILE_NAME	yyyyMMdd
DATE_TO_STRING_FORMAT_FOR_USER_INTERFACE	MM/dd/yyyy
KualiExceptionIncidentServiceImpl.REPORT_MAIL_LIST	
PREORDER_CITATION_OPR	createPreOrderForCitation
PREORDER_NAMESPACE	http://service.select.ole.kuali.org/
PREORDER_OPENURL_OPR	createPreOrderForOpenURL
PREORDER_PORTNAME	preOrderService
PREORDER_SERVICENAME	preOrderService
PREORDER_URL	http://tst.ole.kuali.org/remoting/preOrderService
PREORDER_WFRM_OPR	createPreOrderForForm
RouteQueue.maxRetryAttempts	3
RouteQueue.timeIncrement	1000
Routing.ImmediateExceptionRouting	false
STRING_TO_DATE_FORMATS	yyyy-MM-dd;MM/dd/yyyy hh:mm a;MM/dd/yy;MM/dd/yyyy;MM-dd-yy;MM-dd-yyyy
STRING_TO_TIMESTAMP_FORMATS	MM/dd/yyyy hh:mm a;MM/dd/yy;MM/dd/yyyy;MM-dd-yy;MMddy;MMMM dd/yyyy;
TIMESTAMP_TO_STRING_FORMAT_FOR_FILE_NAME	yyyyMMdd-HH-mm-ss-S

## Cache Management



### Cache Management

The Cache Management tool is used to clear all or individual local system caches. Users may select specific

or all caches and click .

### Tip

Click the arrow on the left of the checkbox to expand the list.

## Document Layout

# Cache Management

Check the boxes for the caches to flush:


- coreServiceDistributedCacheManager
- kewDistributedCacheManager
- kimDistributedCacheManager
- locationDistributedCacheManager
- ole.core.DistributedCacheManager

Flush

Close

---

# Chapter 9. Monitoring Administrative Documents

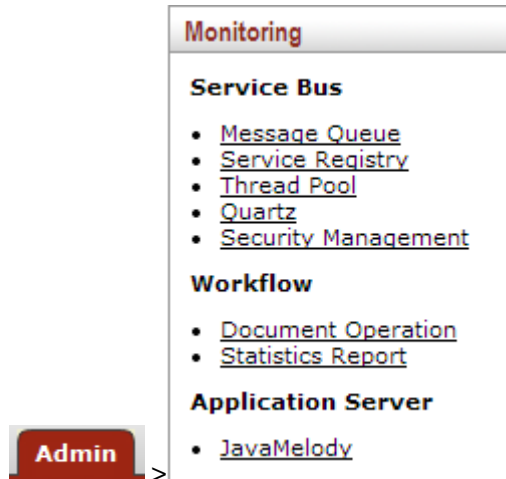

The items in the Monitoring submenu pertain to the Kualiti [Service Bus](#) and the Kualiti Enterprise [Workflow](#) (KEW) as well as the Application Server.

An Enterprise Service Bus is a middleware architecture construct which allows for integrating enterprise applications in an implementation-independent fashion. The Kualiti Service Bus (KSB) specifically provides a messaging fabric as well as allowing acquisition of services on the bus using a service registry and invocation of those services using various protocols (java serialization over HTTP and SOAP). Because these are primarily technical operations, they are not covered in great detail here.

Use of these options is restricted to users with the KR-SYS Technical Administrator role.

## Service Bus



## Message Queue



The Message Queue allows administrators to monitor messages that are flowing through the Service Bus. Messages can be edited, deleted or forwarded to other machines for processing from this screen.

## Monitoring Administrative Documents



[Refresh Page](#)

Current Node Info  
 IP Address: 10.147.198.103  
 Application ID: OLE  
 message.persistance: true  
 message.delivery: async  
 message.off: false

Message ID:	<input type="text"/>
Service Name:	<input type="text"/>
Application ID:	<input type="text"/>
IP Number:	<input type="text"/>
Queue Status:	<input type="text" value="v"/>
App Specific Value 1:	<input type="text"/>
App Specific Value 2:	<input type="text"/>
<input type="button" value="Filter"/>	

**Documents currently in route queue: 3**

3 items retrieved, displaying all items.

Message Queue Id	Service Name	Application ID	IP Number	Queue Status	Queue Priority	Queue Date	Expiration Date	Retry Count	App. S. Val
708	{http://rice.kuali.org/kew/v2_0}documentProcessingQueue	OLE	10.147.198.103	EXCEPTION	5	06:11 AM 06/21/2013	06:11 AM 06/21/2013	1	46
561	{http://rice.kuali.org/kew/v2_0}documentProcessingQueue	OLE	10.147.198.103	EXCEPTION	5	08:29 AM 06/12/2013	08:29 AM 06/12/2013	1	33
540	{http://rice.kuali.org/kew/v2_0}documentProcessingQueue	OLE	10.147.198.103	EXCEPTION	5	05:27 PM 06/11/2013	05:27 PM 06/11/2013	1	33

<b>Message</b>	
Message Queue Id:	10500
Status:	E
Date:	03:20 PM 09/22/2009
Expiration Date:	
Priority:	3
Retry Count:	3
IP Number:	129.79.216.129
Service Name:	OSCacheNotificationService
Service Namespace:	KFS
Method Name:	invoke
App Specific Value 1:	
App Specific Value 2:	
<b>Payload</b>	
Payload Class:	class org.kuali.rice.ksb.messaging.AsynchronousCall
Method Name:	invoke
ignoreStoreAndForward:	false
ServiceInfo.messageEntryId:	5457
ServiceInfo.serviceNamespace:	RICE
ServiceInfo.serverIp:	10.64.87.165
ServiceInfo.serviceName:	OSCacheNotificationService
ServiceInfo.endpointUrl:	http://localhost:8080/kr-dev/remoting/OSCacheNotificationService
ServiceInfo.queue:	false
ServiceInfo.alive:	true
ServiceInfo.priority:	3
ServiceInfo.retryAttempts:	3
ServiceInfo.millisToLive:	-1
ServiceInfo.messageExceptionHandler:	org.kuali.rice.ksb.messaging.exceptionhandling.DefaultMessageException
ServiceInfo.service.class:	
ServiceInfo.busSecurity:	true
ServiceInfo.credentialsType:	
Arguments:	[java.io.Serializable] type=2, data=SystemParameterProxy

## Service Registry

**Admin** > **Monitoring** > **Service Bus** > [Service Registry](#)

The Service Registry displays a read-only view of the Service Bus's Service Registry. The Service Registry shows all services that are exposed on the Service Bus and includes information about them (such as IP Address, endpoint URL, etc.). The Service Registry also includes an administrative function which allows the administrator to refresh its view of the registry.

**Xworkflow** [Refresh Page](#)

Current Node Info

Application ID: OLE  
IP Address: 10.154.185.108  
Instance ID: OLE-10.154.185.108  
dev.mode: false

**Published Services:**

Service Name	Endpoint URL
{OLE}OLEDocumentSearchCustomizer	<a href="http://tst.ole.kuali.org/remoting/OLEDocumentSearchCustomizer">http://tst.ole.kuali.org/remoting/OLEDocumentSearchCustomizer</a>
{OLE}OLEPurapDocumentSearchCustomizer	<a href="http://tst.ole.kuali.org/remoting/OLEPurapDocumentSearchCustomizer">http://tst.ole.kuali.org/remoting/OLEPurapDocumentSearchCustomizer</a>
{OLE}OLESearchableAttribute	<a href="http://tst.ole.kuali.org/remoting/OLESearchableAttribute">http://tst.ole.kuali.org/remoting/OLESearchableAttribute</a>
{OLE}PurapFinancialSystemSearchableAttribute	<a href="http://tst.ole.kuali.org/remoting/PurapFinancialSystemSearchableAttribute">http://tst.ole.kuali.org/remoting/PurapFinancialSystemSearchableAttribute</a>
{OLE}PurchaseOrderActionListAttribute	<a href="http://tst.ole.kuali.org/remoting/PurchaseOrderActionListAttribute">http://tst.ole.kuali.org/remoting/PurchaseOrderActionListAttribute</a>

## Thread Pool

**Admin** > **Monitoring** > **Service Bus** > [Thread Pool](#)

The Thread Pool provides a means by which an administrator can change the size of the Thread Pool used by the Service Bus for processing messages.

**Xworkflow** [Refresh Page](#)

Core Pool Size:

Maximum Pool Size:

Pool Size: 20

Active Count: 0

Largest Pool Size: 20

Keep Alive Time: 60000

Task Count: 1713

Completed Task Count: 1713

RouteQueue.TimeIncrement:

RouteQueue.maxRetryAttempts:

Execute Across All Servers with Service Namespace KFS

## Quartz

**Admin** > **Monitoring** > **Service Bus** > [Quartz](#)



Quartz provides a means by which an administrator can schedule delayed tasks, including retry attempts for messages that cannot be sent the first time.

## Security Management



The Security Management provides a means by which an administrator can generate a keystore in the Kuali Service Bus (KSB).


**Create new Client Keystore file:**

Desired Alias (must be unique from list below):	<input type="text"/>
Password (will be used for keys as well as keystore):	<input type="password"/>
Re-Enter Password:	<input type="password"/>
<input type="button" value="create"/> <input type="button" value="clear fields"/>	

**Existing Keystore Entries:**  
One item retrieved.

Alias	Create Date	Type
rice	01:59 PM 10/10/2007	Private Key

## Workflow




The options in the Workflow submenu group are used to configure and maintain the Kuali Enterprise Workflow (KEW).

Use of these options is restricted to users with the KR-SYS Technical Administrator role.

## Document Operation



The **Document Operation** option allows you to manipulate the XML data in the document and save the document. The screen is divided into several sections: **Document Action**, **Document**, **Action Requests**, **Actions Taken**, **Action Items**, **Route Node Instances**, **Brach States**, and **Annotation for Admin Change**.



**Operate on a document**

*Document ID:	<input type="text" value="317123"/>
<input type="button" value="get document"/> <input type="button" value="clear"/>	

1. Enter the document ID you are searching for and click  .
2. Make changes to the appropriate section of the document.
3. Click  .

		Document
Flush Rule Cache	<input type="button" value="submit"/>	
Queue Document	<input type="button" value="submit"/>	
Index Searchable Attributes	<input type="button" value="submit"/>	
Queue Document Requeuer	<input type="button" value="submit"/>	
Queue Document Blanket Approve	<input type="button" value="submit"/>	User: <input type="text"/>
Queue Document Move	<input type="button" value="submit"/>	Action Taken Id: <input type="text"/>
		Node Names: <input type="text"/>
Queue Action Invocation	<input type="button" value="submit"/>	User: <input type="text"/>
		Action Item Id: <input type="text"/>
		Action Code: <input type="text"/>

Document Actions section

Monitoring  
Administrative Documents






---

Document	
<b>Document ID: 331500</b>	<input type="radio"/> Update <input checked="" type="radio"/> No Operation
* Document Version:	<input type="text" value="1"/>
* Initiator ID:	<input type="text" value="1617103986"/>
* Initial Route Node Instances:	<input type="text" value="563377067"/>
* Route Status:	ENROUTE
* Route Level:	<input type="text" value="1"/>
* Create Date:	<input type="text" value="03/10/2009"/>
* Doc Status Modification Date:	<input type="text" value="03/10/2009"/>
Approved Date:	<input type="text"/>
Finalized Date:	<input type="text"/>
Route Status Modification Date:	<input type="text"/>
Route Level Modification Date:	<input type="text"/>
Doc Type ID:	<input type="text" value="320834"/>
Doc Title:	<input type="text" value="Distribution Of Income"/>
Application Doc ID:	<input type="text"/>
Doc Content:	<pre>&lt;documentContent&gt;&lt;applicationContent&gt;&lt;org.kuali.rice.kns.workflow.KualiDocumentXmlMaterial &lt;/documentContent&gt;</pre>









Document section

<b>Action Requests</b>	
<b>Action Request ID: 3013</b>	<input type="radio"/> Update <input type="radio"/> Delete <input checked="" type="radio"/> No Operation
* Document Version:	<input type="text" value="1"/>
* Document ID:	<input type="text" value="3646"/>
* Route Node Instance ID:	<input type="text" value="7910"/>
* Action Requested:	COMPLETE <input type="button" value="v"/>
* Create Date:	<input type="text" value="09/23/2009"/> <input type="button" value="calendar"/>
* Status:	ACTIVE <input type="button" value="v"/>
* Priority:	<input type="text" value="0"/>
* Route Level:	<input type="text" value="0"/>
* Responsibility ID:	<input type="text" value="-3"/>
Responsibility Description:	<input type="text" value="Initiator needs to comp"/>
Action Request Parent ID:	<input type="text"/>
Recipient Type:	person <input type="button" value="v"/>
Person ID:	<input type="text" value="3420506415"/> <input type="button" value="search"/>
Workgroup ID:	<input type="text"/> <input type="button" value="search"/>
Role Name:	<input type="text"/> <input type="button" value="search"/>
Qualified Role Name:	<input type="text"/>
Qualified Role Label:	<input type="text"/>
Action Taken ID:	<input type="text"/>
Force Action:	<input type="text" value="Yes"/>
Approve Policy:	<input type="text" value="F"/>
Delegation Type:	<input type="text"/>
Current Indicator:	<input type="text" value="Yes"/>
Annotation:	<input type="text"/>

Action Requests section

<b>Actions Taken</b>	
<b>Action Taken ID: 12742</b>	<input type="radio"/> Update <input type="radio"/> Delete <input checked="" type="radio"/> No Operation
* Document ID:	<input type="text" value="331494"/>
* Document Version:	<input type="text" value="1"/>
* Action Taken:	BLANKET APPROVED 
* Action Date:	<input type="text" value="03/10/2009"/> 
* Action Taken Person ID:	<input type="text" value="6162502038"/> 
Delegator Person ID:	<input type="text"/> 
Delegator Workgroup ID:	<input type="text"/> 
Current Indicator:	<input type="text" value="Yes"/>
Annotation:	<input type="text"/>

Actions Taken section

<b>Action Items</b>	
<b>Action Item ID: 10775</b>	<input type="radio"/> Update <input type="radio"/> Delete <input checked="" type="radio"/> No Ope
* Document ID:	<input type="text" value="3646"/>
* Doc Type Name:	<input type="text" value="PREQ"/> 
* Doc Type Label:	<input type="text" value="Payment Request"/>
* Doc Handler URL:	<input type="text" value="https://test.kuali.org/k"/>
* Date Assigned:	<input type="text" value="09/23/2009"/> 
* Action Request ID:	<input type="text" value="3013"/>
* Action Requested:	COMPLETE 
* Responsibility ID:	<input type="text" value="-3"/>
* Person ID:	<input type="text" value="3420506415"/> 
Workgroup ID:	<input type="text"/> 
Role Name:	<input type="text"/> 
Delegator Person ID:	<input type="text"/> 
Delegator Workgroup ID:	<input type="text"/> 
Document Title:	<input type="text" value="Payment Request - PO"/>

Action Items section

Route Node Instances	
<b>Route Node Instance ID: 563358013</b>	<input type="radio"/> Update <input type="radio"/> Delete <input checked="" type="radio"/> No Operation
Instance Name:	Adhoc Routing
Active Indicator:	<input type="text" value="true"/>
Complete Indicator:	<input type="text" value="false"/>
Initial Indicator:	<input type="text" value="false"/>
Previous Route Node Instances:	None
Next Route Node Instances:	None
Route Node States:	None

Route Node Instances section

Branch States	
<b>Branch ID: 563377051</b>	<input type="radio"/> Update <input checked="" type="radio"/> No Operation
Branch Name:	<input type="text" value="PRIMARY"/>
Branch State ID: 563377053	Key: <input type="text" value="System.PostProcessorf"/> <input type="button" value="delete 563377053"/> Value: <input type="text" value="true"/>
Branch State ID: 563377054	Key: <input type="text" value="System.PostProcessorf"/> <input type="button" value="delete 563377054"/> Value: <input type="text" value="true"/>

Branch States section

Annotation for Admin Change	
Annotation:	<input type="text"/>

Annotation for Admin Change section

## Statistics Report

[Admin](#) > [Monitoring](#) > | [Workflow](#) > [Statistics Report](#)

The Statistics Report displays the counts of documents and users for various statuses and categories.

Monitoring  
Administrative Documents

**Workflow Statistics**

**Aggregates**

<b>Number of Document Types:</b>	319
<b>Number of Users:</b>	11
<b>Number of Active Items In All Action Lists:</b>	269

<b>Number of Documents Initiated in the Last 30 Days:</b>	OLE_DI	2
	OLE_REQTYPE	1
	ParameterTypeMaintenanceDocument	2
	OLE_PE	3
	OLE_ROOM	1
	OLE_MOTD	1
	OLE_SRYP	1
	OLE_RPTC	2
	OLE_TF	1
	OLE_PMBA	2
	OLE_PREQ	32
	OLE_OBJC	1
	OLE_GSOB	2
	OLE_RCVL	27
	OLE_PO	402
	OLE_PMSN	1
	ParameterMaintenanceDocument	2
	OLE_DV	1
	OLE_PMVC	1
	OLE_SACC	2
	NamespaceMaintenanceDocument	1
	OLE_ACQS	12
	OLE_IB	2
	OLE_PMALST	1
	OLE_SOPT	5
	OLE_ACCT	1
	OLE_PMVT	2
	OLE_PMCA	2
	OLE_PMPT	1
	OLE_FFD	1
	OLE_BA	3
OLE_PMST	1	
OLE_ACQBTHUPLOAD	22	
OLE_CM	3	
OLE_INVCSBTYP	7	
OLE_PYMNTMTHD	2	
OLE_FLU	1	
OLE_AV	1	
OLE_PMCP	1	
OLE_GACC	1	
CountryMaintenanceDocument	1	
OLE_APRD	1	
OLE_ORDQU	5	
IdentityManagementGroupDocument	1	
OLE_PVEN	12	
OLE_REQS	352	
OLE_CR	4	
DocumentTypeDocument	78	
OLE_OSTY	1	
OLE_CSPR	2	
OLE_INVCTYP	1	
ComponentMaintenanceDocument	2	
OLE_CCTY	1	
CountyMaintenanceDocument	1	
OLE_CCR	1	

**Date Range**

Begin Date:	<input type="text" value="01/01/1900"/>	End Date:	<input type="text" value="01/01/2400"/>
<b>Routing Status</b>	<b>Number of Documents for Date Range</b>		
CANCELED:	0		
DISAPPROVED:	0		
ENROUTE:	19		

