

# **Guide to the OLE System Administration Module**

---

---

---

# Table of Contents

Introduction .....	vi
1. Batch Processes Administrative Documents .....	1
Batch File Type .....	1
Batch Process .....	2
Process Overview .....	2
Batch Process Filter Criteria .....	11
Batch Process Job Details .....	12
Batch Process Profile .....	15
Document Layout .....	15
Batch Process Schedule .....	35
Batch Process Type .....	35
Batch File .....	36
Batch/Scheduled Jobs .....	37
Batch Job Lookup .....	38
Document Layout .....	38
Job CRON Expression - controlling the frequency/schedule of job execution .....	38
Batch Semaphore File Upload .....	40
Schedule .....	41
Document Layout .....	43
Special Batch File Upload .....	47
Compute Courtesy and Overdue Notice Dates for Loans .....	47
2. Monitoring Administrative Documents .....	49
Cache Management .....	49
Document Layout .....	50
Configuration Viewer .....	50
Document Layout .....	50
Java Melody .....	50
Message Queue .....	51
Quartz .....	52
Security Management .....	52
Service Registry .....	52
Thread Pool .....	53
Document Operation .....	53
Document Action .....	54
Document .....	55
Action Requests .....	56
Actions Taken .....	57
Action Items .....	58
Route Node Instances .....	59
Branch States .....	59
Annotation .....	60
Statistics Report .....	60
3. Services and Functions Administrative Documents .....	62
Discovery Service .....	62
Document Store Search .....	64
DocStore Service .....	71
Patron Merge .....	71
Process Overview .....	72
4. System Configuration Administrative Documents .....	74
Data Mapping Field Definition .....	74
Document Layout .....	75

External Data Sources (z39.50 connection) .....	76
Document Layout .....	76
Functional Field Description .....	77
Document Layout .....	78
Message Of The Day .....	78
Document Layout .....	79
System Options .....	79
Document Layout .....	80
Search Framework Configuration .....	82
Document Layout .....	83
Process Overview .....	93
Namespace .....	94
Document Layout .....	94
Parameter .....	95
Document Layout .....	96
Parameter Component .....	97
Document Layout .....	97
Parameter Type .....	98
Document Layout .....	98
5. Workflow Administrative Documents .....	99
Document Type .....	99
Document Layout .....	100
PeopleFlow .....	102
Getting Started .....	102
Document Layout .....	103
Routing & Identity Management Document Type Hierarchy .....	105
Document Hierarchy View .....	106
Document Configuration View .....	106
Rule Attribute .....	110
Statistics .....	111
Workflow Attribute .....	111
XML Import .....	112
6. KRMS Administrative Documents .....	114
Agenda Lookup .....	114
Document Layout .....	115
Attribute Lookup .....	118
Document Layout .....	118
Category Lookup .....	118
Document Layout .....	119
Context Lookup .....	120
Document Layout .....	120
KRMS Builder .....	121
Term Lookup .....	121
Document Layout .....	122
Term Specification Lookup .....	122
Document Layout .....	123
7. System Administration Documents .....	124
Menu Access to KIM Functions .....	124
Basic KIM Concepts .....	124
KIM Permissions, Responsibilities, and Roles .....	124
KIM Groups .....	125
Routing & Identity Management Document Type Hierarchy Tool .....	125
Group .....	125
Document Layout .....	125



Permission .....	128
Document Layout .....	130
Person .....	132
Document Layout .....	132
Process Overview .....	139
Responsibility .....	140
Document Layout .....	142
Role .....	144
Document Layout .....	145
Role/Group/Permission/Responsibility Type .....	151
Document Layout .....	151
8. System Admin Maintenance Documents .....	153
Campus .....	153
Document Layout .....	154
Country .....	154
Document Layout .....	155
County .....	155
Document Layout .....	156
Postal Code .....	156
Document Layout .....	157
State .....	157
Document Layout .....	158
Address Type .....	158
Document Layout .....	159
Affiliation Type .....	159
Document Layout .....	159
Campus Type .....	160
Document Layout .....	160
Citizenship Status .....	161
Document Layout .....	161
Email Type .....	162
Document Layout .....	162
Employee Type .....	162
Document Layout .....	163
Entity Type .....	163
Document Layout .....	164
External Identifier Type .....	164
Document Layout .....	164
Name Type .....	165
Document Layout .....	165
Phone Type .....	166
Document Layout .....	166

---

# Introduction

This guide provides information about using OLE system administration functions available via the user interface. Users with proper authorization are able to perform powerful functions that affect the entire system. These functions, which are accessible via the **Admin** menu tab, allow you to:

- Support the Kualo Identity Management (KIM) module and implement security based on accounting line attributes
- Define basic types of location and reference information
- Control the running of batch jobs
- Support the Kualo Enterprise Workflow (KEW) module and
- Enable authorized users to perform a variety of other functional and technical activities.

## Note

Only members of OLE-SYS Manager and KR-SYS Technical Administrator roles may initiate most documents in the Admin Menu. Other users may look up values from the lookup screens but may not be able to access other options at all.

This guide is organized to follow the layout of the Admin tab. Please note that some submenus are not covered in this guide.

- System provides access to KIM identity (roles and permissions) and locations, as well as identity management references (maintenance documents associated with KIM identities).
- Location provides access to creating and maintaining locations and location levels for the maintenance of library records.
- Batch allows users to upload files used by various OLE batch jobs, run batch jobs and see files generated by those jobs for Financial Processing, General Ledger, and System processes.
- Batch Framework submenu allows users to perform a variety of functional and technical activities that process cataloging records in batch.
- Kualo OLE Modules submenu allows you to perform a variety of functional and technical activities that affect the entire system. This includes uploading XML and People Flow rules to modify workflows. Users may also access the Staff Upload interface.
- KRMS Rules provides access to agendas, context, attribution, term and category lookups.
- Global Configuration Settings provide access to administering export and global import services.
- Configuration provides access to high level configuration options. Users may modify workflows and parameters for OLE.
- Monitoring provides access to the Kualo Service Bus and additional workflow documentation.

These sections are divided into subsections covering individual functions in the menu grouping. For each function, the applicable subsection presents a breadcrumb trail showing you how to access the function, information about the layout of and fields on the applicable screen(s), and where appropriate, additional information to help you use the screen(s).

## Note

In order to work efficiently, you need to understand the basics of the OLE's user interface. For information and instructions about logging on and off, navigating, understanding the components of screens, and performing basic operations in the screens, see the [OLE Basic Functionality and Key Concepts](#).

This guide as well as guides to other OLE modules are available for download from the [OLE Documentation Portal](#).

## Tip

Bookmark any page within OLE. This will allow you to easily navigate back to an interface or e-doc in one click, just log in.

---

# Chapter 1. Batch Processes

## Administrative Documents

- [Batch File Type](#)
- [Batch Process](#)
- [Batch Process Filter Criteria](#)
- [Batch Process Job Details](#)
- [Batch Process Profile](#)
- [Batch Process Schedule](#)
- [Batch Process Type](#)

### OLE FS Batch


- [Batch File](#)
- [Batch/Scheduled Jobs](#)
- [Batch Semaphore File Upload](#)
- [Deliver Batch Job](#)
- [Schedule](#)
- [Special Batch File Upload](#)
- [Compute Loan Overdue Notice Dates](#)



The Batch Framework submenu allows you to perform a variety of functional and technical activities that process cataloging records in batch.

The top section of the **Batch Processes** submenu allows users to manage importing of order records, invoices, patrons, bibliographic records, locations, and serial records. It also allows users to batch export and batch delete records and manages the claim reports. The OLE FS Batch section controls many of the batch processes that occur for financial processes and OLE workflows. It also includes the **Deliver Batch Job** which creates notices for patrons.

## Batch File Type



# Batch File Type Lookup

The **Batch File Type** is a maintenance document used to support batch process profile.

### Note

Batch File Types cannot be edited via the interface. Technical assistance is required to add new or edit existing batch file types.

## Batch File Type Lookup

① Lookup Results: 1 message

Id:	<input type="text"/>
File Name:	<input type="text"/>
File Type:	<input type="text"/>
Data Type:	<input type="text"/>

• 3 items retrieved, displaying all items.

Show  entries

Id	File Name	File Type
4	XML	XML
5	EDI	EDI
6	MRC	MRC

Showing 1 to 3 of 3 entries

As a function of OLE, you may search for batch file types. Execute a blank search to review the available batch file types.

## Batch Process



The **Batch Process** interface, available from the **Admin** menu, allows staff to run import and export jobs via the OLE user interface. Once the job has run, staff may receive notifications of completion, view reports and, for importing, make changes to records as necessary.

## Process Overview

Open the **Batch Process** interface from the **Admin** tab.

### Batch Process?

Document Number:	4064	Document Status:	INITIATED
Initiator Network Id:	ole-quickstart	Creation Timestamp:	02:11 PM 06/23/2014

\* Indicates required field


#### Batch Process Section

Batch Process Name:	<input type="text"/>
Batch Process Profile Name:	<input type="text"/> <input type="button" value="Q"/>
Batch Process Type:	<input type="text"/>
Batch Size:	<input type="text" value="10000"/>
Send Job Report To:	<input type="text"/>

Please enter multiple email id's separated by comma (,)

Run Now  Schedule

1. Enter a name to distinguish your batch process. This field is not required but it will be helpful to identify the batch process. If left blank, the profile name chosen and a number is used by OLE.

2. Choose the **Batch Process Profile**. You must search for it from the lookup  .
3. Modify the **batch size** if necessary. This is the number of records to import or export per batch.
  - For example, if you are exporting a database of seven million records, you might specify a batch size of one million and OLE will process the output in batches of one million.
  - However if you are importing records and you specify a lesser number of records to import than what exists in your file, the Batch Process will only import the specified number of records and not the full amount in your file.
4. If you wish to receive the batch process job report via email, enter your email in **Send Job Report To**.  
  
If you do not want to receive email notifications, you may also check the listing of job outputs from the **Batch Process Job Details** interface (see [below](#)).
5. Depending on the **Batch Process Type** (auto-populated when the **Batch Process Profile Name** is selected), an **Input Section** or an **Output Section** will appear.
  - **Output Section** is made available for exporting records types. Select the **Output Format** (MARC or MARCXML) from the drop down.

Enter the **Output File Name**, a name given to the file.

## Note

A note on naming the Output File:

- If a "Batch Process Name" is specified, and no "Output File Name" is specified, the batch process name is used for the filename.
- If an "Output File Name" is specified, and no "Batch Process Name" is given, the "Output File Field" is used for the filename.
- If a "Batch Process Name" is specified, and a filename is given in the "Output File Name" field, the "Output File Name" field is used to generate the filename.
- If a file name containing a space is entered in either the "Output File Name" field or the "Batch Process Name" field on the Batch Process screen, although the file will appear normal in the directory display (accessed from Batch Process Job Details > View Job Report > View Export Path), the link to download the file will break off the filename at the first space, with no extension.

This is a known bug to be fixed in a future release. See [OLE-6603](#).

Exported file location will be: export/[batch\_process\_profile or user\_specified\_location]/[job\_name or job [batch\_id]]- [start timestamp] [-part#]. [extension]

# Batch Processes Administrative Documents

## Batch Process<sup>2</sup>

Document Number:	4064	Document Status:	INITIATED
Initiator Network Id:	ole-quickstart	Creation Timestamp:	02:11 PM 06/23/2014

\* Indicates required field

### Batch Process Section

Batch Process Name:	<input type="text"/>
Batch Process Profile Name:	Test_Batch_Export_BibOnly_Full <input type="text"/>
Batch Process Type:	Batch Export
Batch Size:	10000
Send Job Report To:	<input type="text"/>
<small>Please enter multiple email id's separated by comma (,)</small>	

### Output Section

Output Format:	Marc
Maximum Number of Records in a File:	100000
Output File Name:	<input type="text"/>

Run Now  Schedule

Submit Close Clear Cancel

- **Input Section** is made available for most importing record types. Select **Browse...** (or **Choose File** depending on your browser) to search for the file from your local machine.

### Batch Process Section

Batch Process Name:	<input type="text"/>
Batch Process Profile Name:	Test_Bib_Import <input type="text"/>
Batch Process Type:	Bib Import
Batch Size:	10000
Send Job Report To:	<input type="text"/>
<small>Please enter multiple email id's separated by comma (,)</small>	

Run Now  Schedule

### Input Section

Upload File:	Browse...	No file selected.
--------------	-----------	-------------------

Submit Close Clear Cancel

- **Input Section for Order Records** requires you to choose both a **MARC** and **EDE** file, unless the Order Import Profile you chose is marked "MARC only".

### Batch Process Section

Batch Process Name:	<input type="text"/>
Batch Process Profile Name:	Test_Order_Import <input type="text"/>
Batch Process Type:	Order Record Import
Batch Process KRMS Profile:	YBP
Batch Size:	10000
Send Job Report To:	<input type="text"/>
<small>Please enter multiple email id's separated by comma (,)</small>	

Run Now  Schedule

### Input Section

Upload Marc File:	Browse...	No file selected.
Upload Edl File:	Browse...	No file selected.

Submit Close Clear Cancel

6. Depending on the **Batch Process Type** (auto-populated when the **Batch Process Profile Name** is selected), an **Input Section** or an **Output Section** will appear.

- **Output Section** is made available for exporting records types. Select the **Output Format** (MARC or MARCXML) from the drop down.

Enter the **Output File Name**, a name given to the file.

## Note

A note on naming the Output File:

- If a "Batch Process Name" is specified, and no "Output File Name" is specified, the batch process name is used for the filename.
- If an "Output File Name" is specified, and no "Batch Process Name" is given, the "Output File Field" is used for the filename.
- If a "Batch Process Name" is specified, and a filename is given in the "Output File Name" field, the "Output File Name" field is used to generate the filename.
- If a file name containing a space is entered in either the "Output File Name" field or the "Batch Process Name" field on the Batch Process screen, although the file will appear normal in the directory display (accessed from Batch Process Job Details > View Job Report > View Export Path), the link to download the file will break off the filename at the first space, with no extension.

This is a known bug to be fixed in a future release. See [OLE-6603](#).

Exported file location will be: export/[batch\_process\_profile or user\_specified\_location]/[job\_name or job [batch\_id]]- [start timestamp] [-part#]. [extension]

## Batch Process<sup>2</sup>

Document Number:	4064	Document Status:	INITIATED
Initiator Network Id:	ole-quickstart	Creation Timestamp:	02:11 PM 06/23/2014

\* Indicates required field

### Batch Process Section

Batch Process Name:	<input type="text"/>
Batch Process Profile Name:	Test_Batch_Export_BibOnly_Full <input type="text"/>
Batch Process Type:	Batch Export
Batch Size:	10000
Send Job Report To:	<input type="text"/>
<small>Please enter multiple email id's separated by comma (,)</small>	

### Output Section

Output Format:	Marc
Maximum Number of Records in a File:	100000
Output File Name:	<input type="text"/>

Run Now  Schedule

- **Output and Input Section for Export Records by File:** If in the profile **Bib Local Id From File** was chose as the filter criteria, you will be able to modify the Output section as noted above and you will upload the .txt file of local identifiers in the Input section. Click **Browse** to find the file on your local machine.



## Important

In the Input section, only a .txt file is allowed. In the file, the local identifiers must be separated by a line break.

**Batch Process Section**

Batch Process Name:	<input type="text"/>
Batch Process Profile Name:	NRS Bib export test <input type="button" value="Q"/>
Batch Process Type:	Batch Export
Batch Size:	10000
Send Job Report To:	<input type="text"/>
	<small>Please enter multiple email id's separated by comma (,)</small>

**Output Section**

Output Format:	Marc <input type="button" value="v"/>
Maximum Number of Records in a File:	100000
Output File Name:	<input type="text"/>

Run Now  Schedule

**Input Section**

Upload File:	Browse... No file selected.
--------------	-----------------------------

- **Input Section** is made available for most importing record types. Select **Browse...** (or **Choose File** depending on your browser) to search for the file from your local machine.

**Batch Process Section**

Batch Process Name:	<input type="text"/>
Batch Process Profile Name:	Test_Bib_Import <input type="button" value="Q"/>
Batch Process Type:	Bib Import
Batch Size:	10000
Send Job Report To:	<input type="text"/>
	<small>Please enter multiple email id's separated by comma (,)</small>

Run Now  Schedule

**Input Section**

Upload File:	Browse... No file selected.
--------------	-----------------------------

7.



Select **Run Now** and click **Submit** to begin the job immediately.

Alternatively, you may select **Schedule** to schedule the job (see [instructions](#) below).

8. To review completed batch jobs, review the report, or restart the job see **Batch Process Job Details**.

## Note

For additional information on **Batch Process Job Details**, see [Batch Process Job Details](#)

To Review jobs that are scheduled, reschedule or remove the job from OLE, see **Batch Process Job Schedule**.

## Note

For additional information on **Batch Process Job Schedule**, see [Batch Process Job Schedule](#)

## Scheduling a Batch Process

If you select **schedule** to schedule the **Batch Process** job, an additional tab will appear to assist in the scheduling process.


- You may choose to schedule by Cron Expression. Select the radio button next to **Cron Expression** and enter the expression in the available text box. For example, "0 0 \* \* \* ?" will export data hourly.

## Schedule


Provide Cron Expression     Schedule  
Enter Cron Expression:

## Note

For more information about Cron expressions in OLE, see [Job Cron Expression - controlling the frequency/schedule of job execution](#).

- You may also choose the radio button **Schedule** to manually enter when the job should occur. You will have two options:
  - **One Time**: Enter the date or search for it from the calendar icon  and time for the job to begin.

## Schedule

Provide Cron Expression     Schedule  
 One Time     Recurring  
Date:    
Time:  
Enter Time in 24HR Format

- **Recurring**: Select the schedule type Daily, Weekly or Monthly.
  - If you selected the Schedule Type **Daily**, enter the time for the job to begin.

## Schedule

Provide Cron Expression     Schedule

One Time     Recurring

**Schedule Type:**     Daily     Weekly     Monthly

**Start Time:**  
Enter Time in 24HR Format

- If you selected the Schedule Type **Weekly**, enter the time for the job to begin and check the box for the days of the week that the job should run.

## Schedule

Provide Cron Expression     Schedule

One Time     Recurring

**Schedule Type:**     Daily     Weekly     Monthly

**Start Time:**  
Enter Time in 24HR Format

### Select Days of Week

**Week days**

Monday

Tuesday

Wednesday

Thursday

Friday

Saturday

Sunday

- If you selected the Schedule Type **Monthly**, enter the time for the job to begin, select the calendar date (for example, 23 for the 23rd day of each month), and enter the number of months that should elapse before the job runs again (for example, you may set the job to run every 3 or 6 months).

## Schedule

Provide Cron Expression  Schedule

One Time  Recurring

**Schedule Type:**  Daily  Weekly  Monthly

**Start Time:**  
Enter Time in 24HR Format

**Select Day of Month**

Day  of every  Month

Once your schedule has been determined, click

To see the details of the batch process, including the percent completed and the job report, go to the Batch Process Job Details.

### Note

For more information about Batch Process Job Details, see the section [below](#).

## Scheduling a full dump of the database then incremental exports

First, create the full batch export profile and run the batch process job.

1. Search for the **batch process profile name** that will export full records.

### Note

To make a batch process profile, see [below](#).

2. Adjust the **batch size** as needed.
3. Select the **output format**.
4. Enter a file name in the **Output filename**.
5. Verify that the radio button **Run Now** is chosen.
6. Click **Submit** to run the full dump.

Next, create the incremental and schedule it to run daily at preferred time.

1. Search for the **batch process profile name** that will export incremental records. A separate profile is needed for this.

### Note

To make a batch process profile, see [below](#).

2. Adjust the **batch size** as needed.
3. Select the **output format**.
4. Enter a file name in the **Output filename**.
5. Select the radio button **Schedule** and schedule the preferred time. The job will pick up changes that exist since the job's creation.

### Note

For more information about scheduling a job, see the [Scheduling a Batch Process](#) section above.

6. Click **Submit** to start the schedule.

## Scheduling a full dump followed by daily incrementals

To schedule a full dump and then have daily incrementals, create two separate profiles - one for the full dump and one for the incremental. Using the created profiles, run the full export immediately followed by the scheduled incremental export. Schedule the incremental export to run after 'x' amount of time (6pm every evening for example). The first incremental export will be useless. However after the incremental runs the second time and after every 'x' amount of time following, it will export the records changed from the time it was scheduled.

## Business Rules

- If items are created through Batch Process (in BIB MARC XML format), there is no limit to the amount of records that can be imported at one time but the code may fail if too many item records are to be created for a single bibliographic record.

## Batch Process Filter Criteria



# Batch Process Filter Criteria Lo

The **Batch Process Filter Criteria** is a maintenance document used to support exporting bibliographic records. Filter Criteria can be selected from the batch process profile to narrow down which records will be exported when the profile is used.

## Note

Batch Process Filter Criteria cannot be edited via the interface. Technical assistance is required to add new or edit existing batch process filter criteria.

### Batch Process Filter Criteria Lookup

Lookup Results: 1 message

Field Id:	<input type="text"/>
Field Name:	<input type="text"/>
Field Display Name:	<input type="text"/>
Field Type:	<input type="text"/>

8 items retrieved, displaying all items.

Show  entries

Field Id	Field Display Name	Field Name	Field Type
1	Bib Local Id	LocalId_search	String
2	Bib Status	Status_search	String
3	Bib Status Updated Date	statusUpdatedOn	Date
4	Date Updated(of Bib, Holdings or Item)	dateUpdated	Date
5	Date Entered(of Bib, Holdings or Item)	dateEntered	Date
6	Created By(of Bib, Holdings or Item)	createdBy	String
7	Updated By(of Bib, Holdings or Item)	updatedBy	String
8	Staff Only(of Bib, Holdings or Item)	staffOnlyFlag	String

Showing 1 to 8 of 8 entries

As a function of OLE, you may search for batch process filter criteria. Execute a blank search to review the available batch process filter criteria.

## Batch Process Job Details



The **Batch Process Job Details** screen displays the batch jobs that have run or are currently running. Staff may also restart a job, view the job report and remove the job from OLE.

Batch Processes  
Administrative Documents

## Batch Process Job Details ?

### Batch Process Job Details

Show 10 entries

Job Id	Job Name	Batch Process Id	Batch Process Type	Batch Process Profile Name	User Name	Total Records	Records Processed	%Completed	Start Time	End Time	Time Spent	Status		Directory Path
00000004		4	Bib Import	LEHI DH Batch Import	ole-quickstart	0	0	0.0%	04/10/2014 09:40 AM	04/10/2014 09:40 AM	0:02	CANCELLED		<a href="#">View Job Report</a>
00000005		5	Bib Import	Test_Bib_Import	ole-quickstart	0	0	0.0%	04/10/2014 09:42 AM	04/10/2014 09:42 AM	0:02	CANCELLED		<a href="#">View Job Report</a>
00000006		6	Bib Import	Test_Bib_Import_datamapping	ole-quickstart	0	0	0.0%	04/10/2014 09:44 AM	04/10/2014 09:44 AM	0:02	PAUSED	<input type="button" value="Remove"/> <input type="button" value="Resume"/>	<a href="#">View Job Report</a>
00000007		7	Bib Import	Test_Bib_Import	ole-quickstart	0	0	0.0%	04/10/2014 09:46 AM	04/10/2014 09:46 AM	0:02	CANCELLED		<a href="#">View Job Report</a>
00000008		8	Bib Import	Test_Bib_Import	ole-quickstart	0	0	0.0%	04/10/2014 09:48 AM	04/10/2014 09:48 AM	0:02	CANCELLED		<a href="#">View Job Report</a>
00000009		9	Bib Import	LEHI DH Batch Import	ole-quickstart	167	167	100.00%	04/10/2014 09:51 AM	04/10/2014 09:51 AM	0:0:19	COMPLETED	<input type="button" value="Remove"/>	<a href="#">View Job Report</a>
00000011		11	Bib Import	LEHI DH Batch Import	ole-quickstart	167	167	100.00%	04/10/2014 10:08 AM	04/10/2014 10:08 AM	0:0:18	COMPLETED	<input type="button" value="Remove"/>	<a href="#">View Job Report</a>
00000010		10	Bib Import	LEHI DH Batch Import	ole-quickstart	86	86	100.00%	04/10/2014 10:05 AM	04/10/2014 10:05 AM	0:0:17	COMPLETED	<input type="button" value="Remove"/>	<a href="#">View Job Report</a>
00000050		50	Invoice Import	Test_Invoice_Import	ole-quickstart	0	0	0.0%	04/14/2014 03:09 PM	04/14/2014 03:09 PM	0:0:3	STOPPED	<input type="button" value="Remove"/>	<a href="#">View Job Report</a>
00000035		35	Invoice Import	Test_Invoice_Import	ole-quickstart	0	0	0.0%	04/14/2014 11:02 AM	04/14/2014 11:03 AM	0:0:6	STOPPED	<input type="button" value="Remove"/>	<a href="#">View Job Report</a>

Showing 1 to 10 of 51 entries

Click **View Job Report** to view the report. If there were files that failed, the Job Report will display a link to the failure reason.

Below is an example of an batch export job report:



## Job Report

<b>Job Id:</b>	1
<b>Job Name:</b>	
<b>Batch Process Type:</b>	Batch Export
<b>Batch Profile Name:</b>	QART-QS0PT75HY
<b>Export Path:</b>	<a href="#">View Export File</a>
<b>Create Time:</b>	06/23/2014 02:18 PM
<b>Batch Process Id:</b>	1
<b>User Name:</b>	admin
<b>Total Records:</b>	3
<b>Records Processed:</b>	3
<b>Success Records:</b>	3
<b>Failure Records:</b>	0
<b>%Completed:</b>	100.00%
<b>Start Time:</b>	06/23/2014 02:18 PM
<b>End Time:</b>	06/23/2014 02:18 PM
<b>Time Spent:</b>	0:0:2
<b>Status:</b>	COMPLETED
<b>Status Desc:</b>	Batch Operation Completed

For batch exports only, clicking the **View Export File(s)** link allows you to view the files:

## File List

Show  entries

File/Folder Name	Size	Last Modified
1-2014-06-23T1818.mrc	500 B	06/23/2014 14:18:21

Showing 1 to 1 of 1 entries

If the batch export type is incremental, the next time the job runs it will output a file of new and changed records and a .txt file of bib IDs for deleted bib records. If holdings records are modified or deleted, the bib record is output again in the next incremental update with only the holdings that remain output to the 9xx fields.

## Batch Process Profile

[Admin](#) > [Batch Processes](#) > [Batch Process Profile](#) >

# Batch Process Profile Lookup

## Batch Process Profile

### Note

Please click [here](#) for technical documentation.

When you select the **Batch Process Profile** link from the **Admin** menu, the system displays the Batch Process Profile lookup. This screen allows staff to search for and edit pre-existing Batch Process Profiles or create new profiles.

### Note

Once a Batch Process Profile is created, it cannot be deleted from the user interface.

## Document Layout

**Batch Process Profile** Document Number: 4445 Document Status: INITIATED  
Initiator Network Id: ole-quickstart Creation Timestamp: 01:44 PM 05/12/2014

\* indicates required field

**Document Overview**

* Description:	<input type="text"/>	Explanation:	<input type="text"/>
Organization Document Number:	<input type="text"/>		

**Main Section**

* Batch Profile Name:	<input type="text" value="Test_Patron_Import"/>	Description:	<input type="text" value="Test_Desc_Patron"/>
* Batch Process Type:	<input type="text" value="Patron Import"/> <input type="button" value="Q"/>		

[Notes and Attachments \(0\)](#)  
[Ad Hoc Recipients](#)  
[Route Log](#)

When creating a new Batch Process Profile, the only unique tab is the **Main Section**. However, depending on the **Batch Process Type** that is selected, different tabs are available for adding or modifying information for the profile.




## Main Section tab

The **Main Section** tab contains basic information about the Batch Process Profile. Additional fields will appear in the Main Section tab depending on the Batch Process Type that is selected.


### ▼ Main Section


<b>* Batch Profile Name:</b>	<input type="text" value="Test_Patron_Import"/>	<b>Description:</b>	<input type="text" value="Test_Desc_Patron"/>
<b>* Batch Process Type:</b>	<input type="text" value="Patron Import"/>	<input type="button" value="Q"/>	

### Main Section definition

Title	Description
Batch Process Name	Enter the name of the Batch Process.
Batch Process Type	Required. Enter the type of batch process or search for it from the lookup  . For example, import patron, export bib, import order.
Description	Display only. Indicates whether the vendor is a parent or child record.
Data to Import	If the <b>Bib Import</b> type is selected, select the data type to import from the drop down list.
Requisitions for Titles	If the <b>Order Record Import</b> type is selected, select from the drop down list to have one requisition created per title or one requisition created for the order.
MARC Only	If the <b>Order Record Import</b> type is selected, and the file to be imported contains MARC records with embedded order data, check this box. If importing order data from an EDIFACT file, do not check this box.
Bib Import Profile	If the <b>Order Record Import</b> or <b>Invoice Import</b> type is selected, the Bib Import Profile is required to create or overlay bibliographic records. Search  for the Bib Import Profile by the lookup  to govern bib import parameters.
Data to Export	If the <b>Batch Export</b> type is selected, select from the drop down list to have only bibliographic data exported or bibliographic and instance data exported.
Export Scope	If the <b>Batch Export</b> type is selected, select from the drop down list how much should be exported: full export, filtered, incremental, or full except staff only bibs.

For **Patron import**, **Location import**, **Invoice import**, **Claim Report** and **Serial Record Import** the Main Section is the only tab available for adding or editing information.



Click  to create a new profile for these types of batch processes.

## Note

Serials Record Import was developed specifically for early adopters to migrate data into OLE. The loader allows data migrators to create three tables of data and load them without interfering with the workflow processes required by Rice. The three tables must be formatted in a very specific way. Each implementer, being unique in their previous systems, will have to work to create their own CSV or XML files to import. For additional information about the loader for 1.5 and the UChicago experience, see [OLE-5642](#). If you have additional questions, please email [ole.technical.usergroup@kuali.org](mailto:ole.technical.usergroup@kuali.org).

Additional information for all other batch process types will be addressed below.

## Order Record Import or Invoice Import: Constant and Default Values Tab

OLE supports two ways of importing order data:

- from a file of EDIFACT order messages, loaded in conjunction with a file of bibliographic data
- from order data embedded in each bibliographic record in a file

Order Record Import profiles have a "Marc only" checkbox on them. If checked, the profile will expect the user to load a file of bibliographic records alone, and will extract data from it to populate the order record. If the checkbox is left unchecked, it will expect the user to load a pair of files (bibliographic and EDIFACT) when using that profile.

If you are creating orders via embedded order data, you must specify which bibliographic fields and subfields contain which pieces of data. (This will vary from file to file, depending on the coding used by the data creator.) You can specify the mapping from bibliographic data to the requisition using the **Constant and Default Values** and **Data Mapping** sections of the profile.


Invoice import can likewise be done two ways:

- by loading a file of EDIFACT invoice messages
- by loading bibliographic records containing embedded invoice data

When loading an EDIFACT order message, you do not need to load bibliographic data at the same time. The file will try to match the invoice lines to existing purchase order lines as part of the load.

When loading invoice data embedded in bibliographic data, your invoice import profile should be linked to an existing bib import profile.

If the **Order Record Import** or **Invoice Import** type is selected from the **Main Section**, a new tab will load.

Enter the constant and default values and click .

- Constant: The value entered in the profile will override the present value or add a value if one was not present in the incoming invoice file.
- Default: The value entered in the profile will be added to the created document if the value is not available in the incoming invoice file.

### Note

Do not forget to select items for the additional **Main Section** fields.


▼ Main Section

* Batch Profile Name:	<input type="text"/>	Description:	<input type="text"/>
* Batch Process Type:	Order Record Import <input type="text"/>		
Requisitions For Titles:	One Requisition Per Title <input type="text"/>		
Marc Only	<input type="checkbox"/>	Bib Import Profile:	<input type="text"/>


▼ Constant and Default Values

* Data Type	Select Field Name	Enter Field Name	Select Field Value	Field Value	Default/Constant	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input checked="" type="radio"/> Constant <input type="radio"/> Default	<input type="button" value="Add"/>

### Constant and Default Values definition

Title	Description
Data Type	Select the <b>Data Type</b> from the drop down menu.
Select Field Name	Depending on the Data Type selected, select the field name from the drop down list.
Enter Field Name	Enter the field name to be defined as the constant or default value.
Field Value	Enter the field value to be defined as the constant or default value.
Default/Constant	Select the radio button for default or constant.
Action	 Click <b>Add</b> to add the Default or Constant value.

Once your **Order Record Import** profile is completed, click



### The following fields are mandatory for an Order Record Import profile to create the Requisition.

For EDI and MARC (Constant and Default Values section):

#### 1. Default Location

##### **Note**

The default location must come from only one subfield (for example: 980 \$x), it cannot be two (980 \$x\$y).

The default location in your MARC record must match the location exactly as it appears in the Requisition's location dropdown. If three levels are used at your institution and three levels appear on the Requisition, then all three levels must be in you MARC subfield. Additionally, location levels must be separated by slashes (\$xUC/DDL/Law).

#### 2. Item Type

##### **Note**

This Item Type does not refer to the Item Type listed on an Item Record (the maintenance table listed under Cataloging Maintenance). This refers to the line item on PURAP (S&A) documents. The only valid choice is "ITEM".

Item Types in the item record need to be entered on a Bib Import Profile that can be linked to the Order Import Profile.

#### 3. Cost Source

#### 4. Method of PO Transmission

#### 5. Building Code

#### 6. Delivery Campus Code

#### 7. Org Code

#### 8. Chart Code

9. Funding Source

For MARC only (Constant and Default Values section or Data Mapping section):

1. List Price
2. Vendor Number
3. Quantity
4. No Of Parts
5. Account Number
6. Object Code
7. Default Location
8. Item Type

**Note**

This Item Type does not refer to the Item Type listed on an Item Record (the maintenance table listed under Cataloging Maintenance). This refers to the line item on PURAP (S&A) documents. The only valid choice is "ITEM".

Item Types in the item record need to be entered on a Bib Import Profile that can be linked to the Order Import Profile.

9. Cost Source
10. Method of PO Transmission
11. Building Code
12. Delivery Campus Code
13. Org Code
14. Chart Code
15. Funding Source

**Note**

When typing a field value into the Constant and Default Values section, you must enter it exactly formatted as it is within OLE. For example, when adding Requestor Name you need to add LastName, FirstName.

## **Creating and Linking Items and E-Holdings during Order Record Import with a Bib Import Profile attached**

When running the batch process for order imports, the Bib Import Profile is executed first and then the Order Import Profile.

Items and E-Holdings can be created by the Bib Import Profile and by the Order Record Import via the Requisition's transition to a Purchase Order. In order to prevent OLE from creating both, a check has been

added to the Order Record Import Profile. If an e-holdings or item record is created or modified by the Bib Import Profile, a second e-holding/item will not be created during the Requisition's transition to a Purchase Order. This ensures that only one new e-holding/item is linked to the Purchase Order and Bibliographic Record.

## Note

OLE cannot run an Order Import batch process with hundreds of items. Additionally, the more items links to each order, the more time the system will take to import the order.


In OLE 1.5, you will not be able to import multiple orders with multiple copies and locations.

## EDI Invoice Import Match Points

OLE will try to match each invoice line with its corresponding purchase order line. Match points are:

1. Primary match - the vendor's ID number: stored in the Vendor Item Identifier field of the PO line item, and in the SNA segment of the EDIFACT message
2. Secondary match - ISSN, stored in the bib. record and in the PIA+5 segment of the EDIFACT message
3. Tertiary match - the OLE PO number, stored in the PO and the RFF+ON segment of the EDIFACT message

## Batch Delete: Match Point Tab

If the **Batch Delete** type is selected from the **Main Section**, a new tab will load. The **Bib Match Point** tab is used to determine what records will be deleted from OLE. Enter the **match point** and click . Users may add as many match points as is necessary.

▼ **Main Section**

* Batch Profile Name:	Test_Batch_Delete	Description:	Test_Desc_delete
* Batch Process Type:	Batch Delete		Q

▼ **Match Point**

Note: If an incoming record matches with more than one existing record, the incoming record will be discarded.

**Bib Match Points**

Bib Match Point	Actions
<input type="text"/>	<input type="button" value="Add"/>
<small>For ex : 001 ,245 \$a, 245 # \$a, 245 04 \$a, 245 #4 \$a, 245 0# \$a</small>	

**Holding Match Points**

Match Point Field	Actions
<input type="text"/>	<input type="button" value="Add"/>

**Item Match Points**

Match Point Field	Actions
<input type="text"/>	<input type="button" value="Add"/>

**Eholding Match Points**

Match Point Field	Actions
<input type="text"/>	<input type="button" value="Add"/>

## Batch Export

OLE does not provide a public discovery layer. As a result, staff will need to export bibliographic and OLE Instance data to various existing discovery layers. The existing systems expect MARC21 bibliographic

records with 9xx local data fields containing a subset of information from OLE Instance records attached to the bibliographic records. OLE is able to suppress bibliographic or Instance data marked as staff only. OLE will also dump incremental updates with additions, modifications and deletions to bibliographic or Instance data as required by each library. OLE also allows the user to specify frequency of full and incremental exports. All of these actions can be set up in the profile and carried out through the **Batch Process** interface.

If the **Batch Export** type is selected from the **Main Section**, four additional tabs will load: **Filter Criteria**, **Data Mapping**, **Delete Field**, and **Rename Field**.

## Note

Do not forget to select items for the additional **Main Section** fields.

**▼ Main Section**

* Batch Profile Name: <input type="text"/>	Description: <input type="text"/>
* Batch Process Type: <input type="text" value="Batch Export"/> <input type="button" value="Q"/>	
Data To Export: <input type="text" value="Bibliographic Data Only"/>	Export Scope: <input type="text" value="Full"/>

**▼ Filter Criteria**

Note : A filter field can be specified in one of two ways:  
1. Selecting an option from the drop-down "Select Field Name".  
2. Entering a MARC field like in the text box "Enter Field Name" : e.g. 001, 245 \$a, 245 \$a\$b, 245 ## \$a, 245 04 \$a, 245 ## \$a\$b

Select field Name	Enter Field Name	Field Value	Field Range From	Field Range To	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="Add"/>

**▼ Data Mapping**

Actions
<input type="button" value="add"/>


**▼ Delete Field**

Field Name	First Indicator	Second Indicator	SubField	SubField Contains	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

**▼ Rename Field**

Original Tag	Ind 1	Ind 2	Subfield	Subfield contains	Rename Tag	Ind 1	Ind 2	Subfield	Subfield contains	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

## Filter Criteria Tab

If you chose filter in the **Export Scope** field of the **Main Section**, enter the filter criteria in the **Filter Criteria** tab and click .

**▼ Filter Criteria**

Note : A filter field can be specified in one of two ways:  
1. Selecting an option from the drop-down "Select Field Name".  
2. Entering a MARC field like in the text box "Enter Field Name" : e.g. 001, 245 \$a, 245 \$a\$b, 245 ## \$a, 245 04 \$a, 245 ## \$a\$b


Select field Name	Enter Field Name	Field Value	Field Range From	Field Range To	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="Add"/>

## Filter Criteria definition


Title	Description
Select Field Name	Select the field name from the drop down list.
Enter Field Name	If the field name does not appear in the <b>Select Field</b> drop down list, enter the field name to be defined as the constant or default value.
Field Value	Enter the field value to be defined as the constant or default value.
Field Range From	Enter a beginning field range to limit the filter.



Batch Processes  
Administrative Documents

Field Range To	Enter an ending field range to limit the filter.
Action	Click  to add the filter criteria value.



















## Data Mapping Tab

Click  to add data mapping options.


**Data mapping** is divided into two sections. The first identifies the source field for the export and the second identifies the destination field for which OLE will map to. Enter the source and destination information

and click the  button next to **Priority**.


### ▼ Data Mapping

Data Mapping Option										Actions	
* Data Type	Source Field	Enter Source Field	Source field Value	* Destination Data Type	Destination Field	Enter Destination Field	Destination Field Value	Priority	Actions		
								0			
Bibmarc	981 \$3			Item	Holdings Location Level3			0			
Bibmarc	981 \$2			Item	Holdings Location Level2			0			
Bibmarc	981 \$1			Item	Holdings Location Level1			0			
Bibmarc	981 \$b			Item	Item Type			0			
Bibmarc	981 \$a			Item	Item Status			0			
Bibmarc	980 \$c			Holdings	Location Level3			0			
Bibmarc	980 \$b			Holdings	Location Level2			0			
Bibmarc	980 \$a			Holdings	Location Level1			0			

## Data Mapping definition

Title	Description
Data Type	Select the type of data (Holding, Item, E Holding) from the drop down list.
Source Field	If you have chosen holding or item as the data type, select the OLE source field from the drop down menu.
Enter Source Field	If you have chosen bibmarc as the data type, enter a source field. For example "100 \$a"
Source Field Value	If you have chosen bibmarc as the data type, enter a source field value.
Destination Data type	Select the type of destination data type (bibmarc, holding or item) from the drop down list.
Destination Field	If you have chosen holding or item as the data type, select the destination field from the drop down menu.
Enter Destination Field	If you have chosen bibmarc as the destination data type, enter a destination field. For example "100 \$a"
Destination Field Value	If you have chosen bibmarc as the data type, enter a destination field value.
Priority	If the same source field is given multiple destinations, you may prioritize which should be first, second, third, and so on.  <b>Note</b>  You cannot map incoming data from multiple fields to a single field in OLE, unless you set priorities. In that case only the first met priority field will be mapped.
Action	Click  to add the Delete Field value.


## Delete Field Tab

The **Delete Field** tab allows you to identify fields that will be deleted during the export. Enter the field information and click . Add as many fields as is needed.


▼ **Delete Field**

Field Name	First Indicator	Second Indicator	SubField	SubField Contains	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

### Delete Field definition

Title	Description
Field Name	Enter the bibliographic field name to be deleted. For example "101" or "245"
First Indicator	Optional. Enter the first indicator to be deleted.
Second Indicator	Optional. Enter the second indicator to be deleted.
SubField	Optional. Enter the subfield to be deleted.
SubField Contains	Optional. Enter the information the subfield contains that will be deleted during the export.
Action	Click  to add the Delete Field value.


## Rename Field Tab

The **Rename Field** tab is used to rename or change fields during the export. It is divided into two sections. The first identifies the original tag within OLE for the export and the second identifies the newly named field in the exported record. Enter information for both the original and rename tags and click .

▼ **Rename Field**

Original Tag	Ind 1	Ind 2	Subfield	Subfield contains	Rename Tag	Ind 1	Ind 2	Subfield	Subfield contains	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

### Rename Field definition

Title	Description
Original Tag	Enter the numeric MARC tag that you wish to rename.
Ind 1	Enter the Indicator 1 that will be changed.
Ind 2	Enter the Indicator 2 that will be changed.
Subfield	Enter the subfield that will be changed.
Subfield Contains	Enter the information that the subfield contains to be changed.
Rename Tag	Enter the replacing numeric MARC tag.
Ind 1	Enter the replacing Indicator 1 value.
Ind 2	Enter the replacing Indicator 2 value.
Subfield	Enter the replacing Subfield.
Subfield Contains	Enter the replacing subfield content.
Action	Click  to add the Rename Field value.

## Example

The most common set up for a batch export is the "incremental" type (set by Export Scope), without a filter and with data mapping of Holdings data as required by the library's discovery layer.

Here is an example:

### Batch Process Profile Document Number: 3561    Document Status: INITIATED Initiator Network Id: ole-quickstart    Creation Timestamp: 04:16 PM 06/23/2014

\* indicates required field

**Document Overview**

* Description: <input type="text"/>	Explanation: <input type="text"/>
Organization Document Number: <input type="text"/>	

**Main Section**

* Batch Profile Name: <input type="text" value="Test_Bat_Export_BibInstance_Inr"/>	Description: <input type="text" value="Test_Desc_Batch_BibInstance_Ir"/>
* Batch Process Type: <input type="text" value="Batch Export"/> <input type="button" value="Q"/>	
Data To Export: <input type="text" value="Bibliographic and Instance Data"/>	Export Scope: <input type="text" value="Incremental"/>

**Filter Criteria**

**Data Mapping**

* Data Type	Source Field	Enter Source Field	Source field Value	* Destination Data Type	Destination Field	Enter Destination Field	Destination Field Value	Priority	Actions
Holdings	Call Number Type	<input type="text"/>	<input type="text"/>	Bibmarc	099St	<input type="text"/>	<input type="text"/>	1	<input type="button" value="Add"/> <input type="button" value="Delete"/>

**Delete Field**

Field Name	First Indicator	Second Indicator	SubField	SubField Contains	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>
500			a		<input type="button" value="Delete"/>

**Rename Field**

Original Tag	Ind 1	Ind 2	Subfield	Subfield contains	Rename Tag	Ind 1	Ind 2	Subfield	Subfield contains	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>
250			a		340			b		<input type="button" value="Delete"/>

**Notes and Attachments (0)**

**Ad Hoc Recipients**

**Route Log**

After creating and saving your Batch Process Profile, go to the [Batch Process](#) interface to set up your incremental export to run on a schedule.


## Batch Export by Filter: Local Identifiers

Set up the Profile:

1. In the Document Overview: Enter a **Description**
2. In the Main Section: Enter a **Batch Profile Name**, search for the **Batch Process Type** "Batch Export", select a type of **Data to Export**, and select the **Export Scope** "Filter".

3. In the Filter Criteria: Select "Bib Local ID from File" under **Select Field Name**. Click **Add**.
4. Click **Submit**

From the Batch Process:

1. Select the **Batch Process Profile Name** from the Lookup  .
2. In the Input Section: Click **Browse...** to search your computer for the .txt file

### **Important**

This .txt file's local identifiers must be separated by a line break

3. Click **Submit**
4. When the **Batch Process Job Details** screen appears, refresh your screen to see the completed job. Click **View Job Report** to download the exported file.

## **Bib Import**

For a demonstration of several Bib Imports in OLE 1.5.2.1, watch "Bib Import 101" available under [OLE Demonstration Library - OLE 1.5 Demos](#). The demonstration presents the setup of several different bib import profiles and the batch processing of .mrc files to import records using the created profiles into OLE. Additionally, to see the step by step functionality of the Bib Import profile, see the Google Document: [Spec - Batch Import](#)

### **Note**

You will need to log into KIS to view this document.

If the **Bib Import** type is selected from the **Main Section**, additional tabs will load: **Match Point, Matching, Add and Overlay Section, Set Bib Status, Staff Only Treatment, Changes to Imported Bibliographic Record, Constant and Default Values** (described above), **Data Mapping, Protected Field, Delete Field, and Rename Field**.

### **Note**

All imported MARC bibliographic records must be Unicode-compliant (UTF-8).

In the **Main Section**, be sure to select the **Data to Import** that is relevant for your import files. If you select "Bibliographic, Instance and EInstance" but only import E-Instance records, you will end up with extraneous holdings and items. Additionally, the **Constant and Default Values** should match the data to import. If you create a profile and select "Bibliographic and EInstance Data", do not enter any constant or default values for Holdings and Items - only for E-Holdings.

# Batch Processes Administrative Documents

## Batch Process Profile

Document Number:	4171	Document Status:	INITIATED
Initiator Network Id:	ole-quickstart	Creation Timestamp:	09:30 AM 07/14/2014

\* indicates required field

### Document Overview


* Description:	<input type="text"/>	Explanation:	<input type="text"/>
Organization Document Number:	<input type="text"/>		

### Main Section

* Batch Profile Name:	<input type="text" value="Test_Bib_Import"/>	Description:	<input type="text" value="Test_Desc_Bib"/>
* Batch Process Type:	<input type="text" value="Bib Import"/> 		
Data To Import:	<input type="text" value="Bibliographic and Instance Data"/>		

- Match Point
- Matching, Add and Overlay Section
- Set Bib Status
- Staff Only Treatment
- Changes to Imported Bibliographic Record
- Constant and Default Values
- Data Mapping
- Protected Field
- Delete Field
- Rename Field
- Notes and Attachments (0)
- Ad Hoc Recipients
- Route Log

## Match Point Tab

On the **Match Point** tab, you may enter match point(s) for the bibliographic, holding, item, or e-holding records. If you add more than one match point, OLE will prioritize them by the order they have been entered (First entered, first matched). Click  after adding each match point.

### Match Point

Note: If an incoming record matches with more than one existing record, the incoming record will be discarded.

#### Bib Match Points

Bib Match Point	Actions
<input type="text"/> <small>For ex : 001 ,245 \$a, 245 ## \$a, 245 04 \$a, 245 #4 \$a, 245 0# \$a</small>	<input type="button" value="Add"/>

#### Holding Match Points

Match Point Field	Actions
<input type="text"/>	<input type="button" value="Add"/>

#### Item Match Points

Match Point Field	Actions
<input type="text"/>	<input type="button" value="Add"/>

#### Eholding Match Points

Match Point Field	Actions
<input type="text"/>	<input type="button" value="Add"/>

## Matching, Add and Overlay Section

Depending on the **Data to Import** selection you have chosen on the Main Section Tab, the **Matching, Add and Overlay Section** allows user to determine what the course of action will be when importing records. Click the radio buttons to make your selection.

## Tip

Follow the tree structure to make your selections - decide: **Do not perform matching on incoming Bib with existing Bibs** or **Perform matching of incoming Bib with existing Bibs**. If you choose to perform matching, look at the next set up of **If** statements and make your selections. Continue on only as deeply into the tree structure as you need to go.

Only open one section at a time, as needed (focus on bibs first, then look at Process Holdings and Items).

One radio buttons will always be selected in each section, even when that section is not applicable.

## Note

If you select **Perform matching of incoming Bib with existing Bibs**, you must have a match point selected. If you select **Add Incoming Bib** under **If incoming Bib does not match with any existing Bibs**, you will receive a failure report when you run the batch process. In a future release, OLE will alert users of this error before the profile is finalized. See [OLE-6789](#).

## ▼ Matching, Add and Overlay Section

Do not perform matching of incoming Bib with existing Bibs.

Add Incoming Bibs.

Perform matching of incoming Bib with existing Bibs.

### If incoming Bib does not match with any existing Bibs

Discard Incoming Bib.

Add Incoming Bib.

### If incoming Bib matches with existing Bib

Add Incoming Bib.

Process Bib, Holdings and Items.

### Process Bib

Discard incoming Bib.

Overlay existing Bib with incoming Bib.

## ▼ Process Holdings and Items

Do not perform matching of Holdings.

Discard incoming Holdings and Items.

Delete all existing Holdings and Items, and add incoming H

Keep all existing Holdings and Items, and add incoming Ho

Perform matching of Holdings.

### If an incoming Holdings does not match with any existing H

Discard incoming Holdings and its Items.

Add incoming Holdings  and its Items.

### If an incoming Holdings matches with any existing Holdings

Add incoming Holdings  and its Items.

Process Holdings and Items

---

### Process Holdings

Discard incoming Holdings.

Overlay existing Holdings with incoming Holding

## Set Bib Status Tab

Depending on the **Data to Import** selection you have chosen on the Main Section Tab, the **Set Bib Status** tab allows user to set the statuses of the new or overlaid bibliographic records. Select the statuses from the drop down menu. For overlaid records, you may choose not to change the status.

▼ **Set Bib Status**

For new records set Bib status as :	None	For Overlaid Bibs:	<input type="radio"/> Do not change Status
			<input checked="" type="radio"/> Set Status as
Change Status To:	Cataloguing		

## Staff Only Treatment Tab

The **Staff Only Treatment** tab allows user to turn on the staff only flag in the cataloging record. For new records, check the box to apply the staff only flag to new bibliographic, instance, or item records. To set staff only for overlaid bibs, check the box at **For Overlaid Bib set Staff Only**.

▼ **Staff Only Treatment**

	For new Bib set Staff Only	<input type="checkbox"/>
	For new Instance set Staff Only	<input type="checkbox"/>
	For new Item set Staff Only	<input type="checkbox"/>
	For Overlaid Bibs:	<input type="radio"/> Do not change Staffonly
		<input checked="" type="radio"/> Set Staffonly as
	For Overlaid Bib set Staff Only	<input type="checkbox"/>

## Changes to Imported Bibliographic Record Tab

The **Changes to Imported Bibliographic Record** tab allows users to modify or delete the 001 field if one exists in the incoming record. If you choose to replace the 001 with a new 035, you will be asked about prepending the contents of the 001 with the 003 field in parenthesis or with a stated value (the prepended contents of the 003 field then the 001 field will appear on a new 035 field in the imported record). To remove prefixes from the incoming 001 data, check the box by **Remove from 001** and enter the prefix to remove, for example, ocn or ocn, ocm.

### ▼ **Changes to Imported Bibliographic Record**

Delete 001

Tag 001:  Change to 035

Remove from 001

Prepend contents of tag 003, enclosed in parentheses


Always prepend this value :

## Constant and Default Values

The **Constant and Default Values** tab is used to set default or constant values in OLE bibliographic, holding, e-holding, and item fields.




## Batch Processes Administrative Documents

Enter the constant or default values and click .


### ▼ Constant and Default Values

* Data Type	Select Field Name	Enter Field Name	Select Field Value	Enter Field Value	Default/Constant	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input checked="" type="radio"/> Constant <input type="radio"/> Default	<input type="button" value="Add"/>


### Constant and Default Values definition

Title	Description
Data Type	Select the type of date (bib, holding or item) from the drop down list.
Select Field Name	If you selected holding or item from the <b>Data Type</b> , select the field name from the drop down list.
Enter Field Name	Enter the field name to be defined as the constant or default value.
Field Value	Enter the field value to be defined as the constant or default value.
Default/Constant	Select the radio button for default or constant. <ul style="list-style-type: none"> <li>“Constant” data will be added to all records created or modified by the batch process.</li> <li>“Default” data will be added to records if there is nothing found on the incoming record. Data will be added unless other data is identified for that field in the Data Mapping section.</li> </ul>
Action	Click  to add the Default or Constant value.

## Data Mapping Tab

Click  to add data mapping options.

The **Data mapping** tab is divided into two sections. The first identifies the source field for the import and the second identifies the destination field for OLE. Enter the source and destination information and click

the  button next to **Priority**.

### ▼ Data Mapping


* Data Type	Source Field	Enter Source Field	Source field Value	* Destination Data Type	Destination Field	Enter Destination Field	Destination Field Value	Priority	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	0	<input type="button" value="Add"/>
Bibmarc	981 \$3			Item	Holdings Location Level3			0	<input type="button" value="Delete"/>
Bibmarc	981 \$2			Item	Holdings Location Level2			0	<input type="button" value="Delete"/>
Bibmarc	981 \$1			Item	Holdings Location Level1			0	<input type="button" value="Delete"/>
Bibmarc	981 \$b			Item	Item Type			0	<input type="button" value="Delete"/>
Bibmarc	981 \$a			Item	Item Status			0	<input type="button" value="Delete"/>
Bibmarc	980 \$c			Holdings	Location Level3			0	<input type="button" value="Delete"/>
Bibmarc	980 \$b			Holdings	Location Level2			0	<input type="button" value="Delete"/>
Bibmarc	980 \$a			Holdings	Location Level1			0	<input type="button" value="Delete"/>

### Data Mapping definition

Title	Description
Data Type	Select the type of data (bibmarc, holding or item) from the drop down list.

Batch Processes  
Administrative Documents

---

Source Field	If you have chosen holding or item as the data type, select the OLE source field from the drop down menu.
Enter Source Field	If you have chosen bibmarc as the data type, enter a source field. For example "100 \$a"
Source Field Value	If you have chosen bibmarc as the data type, enter a source field value.
Destination Data Type	Select the type of destination data type (bibmarc, holding or item) from the drop down list.
Destination Field	<p>If you have chosen holding or item as the data type, select the destination field from the drop down menu.</p> <p><b>Note</b></p> <p>The Destination Field options do not appear until you have made a selection in the Destination Data Type Field.</p> <p><b>Tip</b></p> <p>If you choose a location level from the dropdown for Holdings or Items, be sure that your institution has a location assigned to that level.</p>
Enter Destination Field	If you have chosen bibmarc as the destination data type, enter a destination field. For example "100 \$a"
Destination Field Value	<p>If you have chosen bibmarc as the data type, enter a destination field value to overlay or add the value to the newly created record. Leave blank for the incoming record to populate the field.</p> <p><b>Note</b></p> <p>The values in this field are not applicable to holdings and item records. The batch process will ignore any data you enter in this field for these record types.</p>
Priority	<p>If the same incoming record could have the same information in multiple fields (for example call numbers), you may prioritize which should fill the OLE record first or second, and so on.</p> <p><b>Note</b></p> <p>You cannot map incoming data from multiple fields to a single field in OLE, unless you set priorities. In that case only the first met priority field will be mapped.</p>
Action	<p>Click  to add the Delete Field value.</p>

## Note

If your Bib Import Profile is set to create holdings and items, then you will need to specify a data source for the two required fields in the item record: Item Status and Item Type. These can be specified either in the Constant and Default Data section or the Data Mapping section.


## Protected Fields Tab

The **Protected Fields** tab is divided into two tabs.

- The **Globally Protected Fields** allows user to view the globally protected fields defined for your OLE system. Click the checkbox to ignore the global protection of any of the fields listed.

## Note

For information on how to add and maintain [globally protected fields](#), see the section of the [Guide to the OLE Describe and Manage Module](#).

- The **Profile Protected Fields** allows users to add fields to protect only when using this profile. Input field information and click .

## Note

Some fields may have multiple occurrences to be protected in both the incoming and the existing record (the 590, for example). In OLE 1.5, the protected fields listed in the **Profile Protected Fields** will be protected for the existing record but will ignore those in the incoming record. This is to be addressed in a later release, see [OLE-6848](#).

### ▼ Protected Field

▼ **Globally Protected Fields**


Field Name	First Indicator	Second Indicator	Sub Field	Ignore GPF
790				<input type="checkbox"/>
791				<input type="checkbox"/>
792				<input type="checkbox"/>
793				<input type="checkbox"/>

---

▼ **Profile Protected Fields**

Field Name	First Indicator	Second Indicator	Sub Field	Sub Field Contains	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

## Delete Field

The **Delete Field** tab allows you to identify entire fields to be deleted from the imported record(s) during the import process. Enter the field information and click . Add as many fields as is needed.

### ▼ Delete Field

Field Name	First Indicator	Second Indicator	SubField	SubField Contains	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>


### Delete Field definition

Title	Description
Field Name	Enter the bibliographic numeric tag of the field to be deleted. For example "710" or "245"
First Indicator	Optional. Use to delete a field with a particular first indicator value. Example: To delete field 510 with first indicator 4, enter "510" as Field Name and "4" as First Indicator.
Second Indicator	Optional. Use to delete a field with a particular second indicator value. Example: To delete field 856 with second indicator 1, enter "856" as Field Name, and "1" as Second Indicator.
SubField	Optional. Use to delete a particular subfield within a field. Example: To delete subfield 2 from field 655, enter "655" in Field Name and "2" in Subfield.
SubField Contains	Optional. Use to delete a field when it contains a subfield with a particular value. Example: To delete field 710 when subfield a contains LINK, enter "710" in Field Name, "a" in Subfield, and "LINK" in Subfield Contains.


Batch Processes  
Administrative Documents

---

Action

Click  to add the Delete Field value.


## Rename Field

The **Rename Field** tab is used to change field tags and data during the import. It is divided into two sections. The first identifies the original tag from the imported record and the second identifies the newly named MARC elements in the OLE record. Enter information for both the original and renamed data and click .

**▼ Rename Field**

Original Tag	Ind 1	Ind 2	Subfield	Subfield contains	Rename Tag	Ind 1	Ind 2	Subfield	Subfield contains	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

### Rename Field definition

Title	Description
Original Tag	Enter the numeric tag from the imported record that you wish to rename during import.
Ind 1	Enter the value of Indicator 1 from the imported record that will be changed.
Ind 2	Enter the value of Indicator 2 from the imported record that will be changed.
Subfield	Enter the subfield from the imported record that will be changed.
Subfield Contains	Enter the information that the subfield contains that will be changed.
Rename Tag	Enter the replacing numeric tag.
Ind 1	Enter the replacing Indicator 1 value.
Ind 2	Enter the replacing Indicator 2 value.
Subfield	Enter the replacing Subfield name.
Subfield Contains	Enter the information that will replace the content in the imported record.
Action	Click  to add the Rename Field value.

## Examples

Rename tag 546 to 500:

**▼ Rename Field**

Original Tag	Ind 1	Ind 2	Subfield	Subfield contains	Rename Tag	Ind 1	Ind 2	Subfield	Subfield contains	Actions
546	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	500	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

Change 245 first indicator value from 0 to 1:

**▼ Rename Field**

Original Tag	Ind 1	Ind 2	Subfield	Subfield contains	Rename Tag	Ind 1	Ind 2	Subfield	Subfield contains	Actions
245	0	<input type="text"/>	<input type="text"/>	<input type="text"/>	245	1	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

Change 730 second indicator value from 2 to 0:

Batch Processes  
Administrative Documents

---

▼ Rename Field

Original Tag	Ind 1	Ind 2	Subfield	Subfield contains	Rename Tag	Ind 1	Ind 2	Subfield	Subfield contains	Actions
730		2			730		0			add

Change 651 subfield x to 651 subfield v:

▼ Rename Field

Original Tag	Ind 1	Ind 2	Subfield	Subfield contains	Rename Tag	Ind 1	Ind 2	Subfield	Subfield contains	Actions
651			x		651			v		add

Change 650 subfield z with text "Siam" to "Thailand":

▼ Rename Field

Original Tag	Ind 1	Ind 2	Subfield	Subfield contains	Rename Tag	Ind 1	Ind 2	Subfield	Subfield contains	Actions
650			z	Siam	650			z	Thailand	add

## Bib Import with multiple holdings and multiple items

To import multiple holdings and items with the Bib Import Profile, you will need to enter information for at least two different destination fields: A "Location Level5" for both the holdings, and a "Holdings Location Level5" for the item. (Depending on your institution, you may need to include additional location levels.) If you do not include these location level destination fields, the bib import profile will only create one holding and one item per bibliographic record. For Example:

▼ Data Mapping

										Actions
										add
										Delete
Data Mapping Option										
Note : For Bibmarc datatype the field value can be like 001, 245 \$a, 245 \$a\$b, 245 ## \$a, 245 04 \$a, 245 ## \$a\$b										
* Data Type	Source Field	Enter Source Field	Source field Value	* Destination Data Type	Destination Field	Enter Destination Field	Destination Field Value	Priority	Actions	
								0	Add	
Bibmarc	852 \$h\$i			Holdings	Call Number			0	Delete	
Bibmarc	852 \$c			Holdings	Location Level5			0	Delete	
Bibmarc	852 \$b			Holdings	Location Level3			0	Delete	
Bibmarc	876 \$3			Item	Enumeration			0	Delete	
Bibmarc	876 \$h\$i			Item	Call Number			0	Delete	
Bibmarc	876 \$f			Item	Item Type			0	Delete	
Bibmarc	876 \$p			Item	Item Barcode			0	Delete	
Bibmarc	852 \$c			Item	Holdings Location Level5			0	Delete	
Bibmarc	852 \$b			Item	Holdings Location Level3			0	Delete	
Bibmarc	876 \$c			Item	Location Level5			0	Delete	
Bibmarc	876 \$b			Item	Location Level3			0	Delete	
Bibmarc	876 \$q			Item	Item Status			0	Delete	
Bibmarc	876 \$w			Item	Call Number Type			0	Delete	
Bibmarc	852 \$w			Holdings	Call Number Type			0	Delete	

## Warning

Leave the Destination Field Value blank. The created records will not include the values if you enter them in this field.

## Batch Process Schedule

[Admin](#) > [Batch Processes](#) > [Batch Process Schedule](#) >

# Batch Process Schedule

The **Batch Process Schedule** displays jobs that are scheduled to run. Staff may also reschedule or remove the job from OLE.

## Batch Process Type

[Admin](#) > [Batch Processes](#) > [Batch Process Type](#) >

# Batch Process Type Lookup

The **Batch Process Type** is a maintenance document used to support batch process profile. Depending on the batch process type selected, the Batch Process Profile will display particular tabs and fields. Batch Process Types are heavily tied into the workflow of batch processes and therefore you cannot add or edit Batch Process Types.

## Note

Technical assistance is required to add new or edit existing batch process types.

## Batch Process Type Lookup [?](#)

① Lookup Results: 1 message

Batch Process Type Id:	<input type="text"/>
Batch Process Type Name:	<input type="text"/>
Batch Process Type Code:	<input type="text"/>
Batch Process Type Active:	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both

• 9 Items retrieved, displaying all items.


Show  entries

Batch Process Type Id	Batch Process Type Name	Batch Process Type Code	Active Indicator
12	Order Record Import	ord_rec	true
13	Invoice Import	inv_ing	true
14	Batch Delete	bat_del	true
15	Batch Export	bat_exp	true
16	Patron Import	pat_ing	true
17	Bib Import	imp_bib	true
18	Location Import	loc_ing	true
19	Claim Report	clm_rep	true
20	Serial Record Import	ser_imp	true

Showing 1 to 9 of 9 entries

As a function of OLE, you may search for batch process types. Execute a blank search to review the available batch process types.

## Batch File

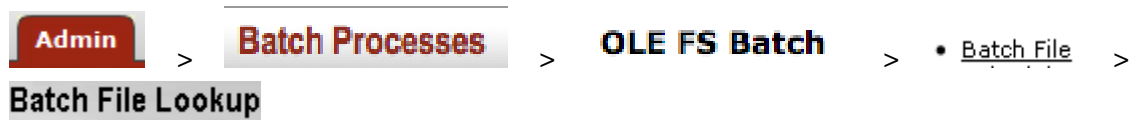

The Batch File lookup allows users to view OLE files, reports and logs. Users can search for files by name, date and by indicating what OLE file directory they reside in. Batch files can be downloaded or deleted.

Only members of OLE-SYS Manager group can download and act on batch files through this interface.

**kuali**  
open library environment

Main Menu Maintenance Administration Rice 2

OLE Financial System :: 1.0.0-M1-r12703 :: 2013-06-20 03:05 UTC (Oracle9i)

Provide Feedback

action list doc search Logged in User: ole-khuntley Login Logout

### Batch File Lookup [?](#)

\* required field

File Path:	staging pdp paymentLoadSummary paymentImport bankFederalReserve paymentExtract sys batchContainer select vendortransmissionfiles bibInfo fp procurementCard purap electronicInvoice
File Name:	<input type="text"/>
Last Modified Date From:	<input type="text"/>
Last Modified Date To:	<input type="text"/>

Batch File Lookup screen definition

Batch Processes  
Administrative Documents

Title	Description
File Path	Select the directory or sub-directory in which the file you wish to retrieve resides. Click the directory you wish to search.  In the default configuration the 'reports' directory contains reports and log files generated by batch jobs. These reports exist in sub-directories corresponding to the module that owns the batch job.  The Staging directory contains input files brought into OLE (such as procurement card or collector upload files) as well as export files generated by OLE (such as check files from PDP). These reports also exist in sub-directories corresponding to the module they are associated with.  Some modules may have additional sub-directories further dividing their Staging output.
File Name	Enter the file you wish to retrieve.
Last Modified Date From	Enter or use the calendar to select a beginning date range for your search.
Last Modified Date To	Enter or use the calendar to select an ending date range for your search.

Reports that match your search will be displayed, showing their name, location and file size (in bytes.) Options in the Actions column allow you to Download or Delete the files.

Actions	File Path	File Name	Last Modified Date	File Size
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	transactionWithExtraFields.xml	07/23/2009 06:08 AM	3959
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	allTransDifferentCC.xml	07/23/2009 06:08 AM	3604
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	allTransSameCC.xml	07/23/2009 06:08 AM	3574
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	badChartData.xml	07/23/2009 06:08 AM	1824
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	badXmlFile.xml	07/23/2009 06:08 AM	680
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	fieldsInWrongOrder.xml	07/23/2009 06:08 AM	2714
<a href="#">Download</a> <a href="#">Delete</a>	staging/fp/procurementCard	transactions1.xml	07/23/2009 06:08 AM	18769

## Warning

Note that manually deleting files via this interface should be done with great caution. There is no interface to undo a deletion and removing certain files may cause batch jobs or processes to fail.

The most common use for deleting a file is to remove a '.done' file from data files such as those created by the GLCP, LLCP or uploaded via the Collector. OLE creates two files for these particular processes, one ending in a '.data' extension and another ending in a '.done' extension. Deleting the '.done' extension file will keep the associated '.data' file from being processed by its associated batch processes but leave the data file itself for reference.

## Batch/Scheduled Jobs

[Admin](#) > [Batch Processes](#) > [OLE FS Batch](#) > [Batch/Scheduled Jobs](#)  
 > **Batch Job Lookup** >  
**Batch Job**

The Batch/Scheduled Jobs document allows users to edit the cron expression which specifies when the particular job should be scheduled. This interface is only for OLE-created jobs (Circulation jobs for example) and not KFS-inherited jobs. To learn more about each of the jobs available in Deliver, see [Batch Processes](#) in the [OLE Guide to Deliver Module](#)



## Batch Job Lookup

You cannot create a new document. You must search for a job and choose to **edit** it from the search results.

### Tip

Enter a blank search to see all available jobs and their cron expressions.

## Batch Job Lookup ?

Job Trigger Name:	<input type="text"/>
Enable Job:	<input type="radio"/> Yes <input type="radio"/> No <input checked="" type="radio"/> Both
<input type="button" value="Search"/> <input type="button" value="Clear Values"/> <input type="button" value="Cancel"/>	

## Document Layout

### Batch Job

Document Number:	4713	Document Status:	INITIATED
Initiator Network Id:	admin	Creation Timestamp:	10:04 AM 03/11/2014

\* Indicates required field

#### Document Overview

* Description:	<input type="text"/>	Explanation:	<input type="text"/>
Organization Document Number:	<input type="text"/>		

#### Add/Edit Batch Job

	Old	New
Job Trigger Name:	generateNoticesJob	generateNoticesJob
Job Cron Expression:	0 0 2 * * ?	<input type="text" value="0 0 2 * * ?"/>
Enable Job:	true	<input checked="" type="checkbox"/>

#### Notes and Attachments (0)

#### Ad Hoc Recipients

#### Route Log

The Batch Job document includes the **Add/Edit Batch Job** tab. The system automatically enters data into both the **Old** and **New** sections in this tab. Selected data fields are available for editing.

### Add/Edit Batch Job definition

Title	Description
Job Trigger Name	Display Only. The name of the batch job that needs to be scheduled.
Job Cron Expression	Enter the cron expression for when the job should be scheduled.
Enable Job	Check the box to allow the job to run.

## Job CRON Expression - controlling the frequency/schedule of job execution

### Note

OLE uses the [Quartz Job Scheduler](#) as it's authority on Cron expressions.

CRON enables users to schedule jobs to run periodically at certain times or dates. A CRON expression is a string comprised of 5 or 6 fields separated by white space that represents a set of times, normally as a schedule to execute some routine.

**Example:**

0 15 10 \* \* ?

0/2 0 12 \* \* ?

**CRON Field definition**

Field Placement	Description
First Field	<p>Represents seconds. The allowed values are 0-59.</p> <p><b>Example:</b></p> <p>2 0 12 * * ? - This will fire the job at 12:00:02 PM every day.</p> <p>0/2 0 12 * * ? - This will fire the job every 2 seconds from 12:00:00 PM to 12:00:58 PM every day.</p>
Second Field	<p>Represents minutes. The allowed values are 0-59.</p> <p><b>Example:</b></p> <p>0 5 12 * * ? - This will fire the job at 12:05 PM every day.</p> <p>0 0/5 12 * * ? - This will fire the job every 5 minutes from 12:00 PM to 12:55 PM every day.</p>
Third Field	<p>Represents hours. The allowed values are 0-23.</p> <p><b>Example:</b></p> <p>0 5 10 12 * * ? - This will fire the job at 12:05 PM every day.</p> <p>0 5 12,18 * * ? - This will fire the job every 5 minutes from 12:00 PM to 12:55 PM and from 6:00 PM to 6:55 PM every day.</p>
Fourth Field	<p>Represents days of the month. The allowed values are 1-31.</p> <p><b>Example:</b></p> <p>0 5 10 12 * * - This will fire the job at 10:05 AM on the 12th day of every month.</p> <p>0 0 12 1/5 * ? - This will fire the job at 12:00 PM every 5 days every month, starting on the first day of the month.</p>
Fifth Field	<p>Represents months. The allowed values are 1-12 or JAN-DEC.</p> <p><b>Example:</b></p> <p>0 11 11 11 11 ? or 0 11 11 11 NOV ? - This will fire the job at 11:11 AM on November 11th of each year.</p>
Sixth Field	<p>Represents days of the week. The allowed values are 1-7 or SUN-SAT.</p> <p><b>Example:</b></p> <p>0 10,44 14 ? 3 WED or 0 10,44 14 ? 3 4 - This will fire the job at 2:10 PM and 2:44 PM on every Wednesday in the month of March.</p> <p>0 10,44 14 ? 3 WED-FRI - This will fire the job at 2:10 PM and 2:44 PM from Wednesday to Friday each week during the month of March.</p>

**Special Character definition**

Special Character	Description
*?	<p>Represents all possible values.</p> <p><b>Example:</b></p> <p>0 0 12 * * ? - This will fire the job at 12:00 PM every day of every month in each year.</p>

'?'	<p>Represents no specific value for the particular field.</p> <p><b>Example:</b></p> <p>0 0 12 * * ? - This will fire the job at 12:00 PM every day of every month in each year irrespective of the day in a week.</p>
'.'	<p>Represents the range of values for a corresponding field.</p> <p><b>Example:</b></p> <p>0 0 14 ? * WED-FRI - This will fire the job at 2:00 PM from Wednesday, Thursday, and Friday of every week.</p>
'/'	<p>Represents incremental values specified to the field</p> <p><b>Example:</b></p> <p>0 0 0/2 * * ? - This will fire the job every 2 hours starting at 12 AM.</p>
'L'	<p>Represents the last value in the specified field. This character is only allowed in the fourth and sixth field.</p> <p><b>Example:</b></p> <p>0 15 10 ? * 6L - This will fire the job at 10:15 AM on the last Friday of every month.</p> <p>0 15 10 L * ? - This will fire the job at 10:15 AM on the last day of every month.</p>
'#'	<p>Represents the "nth" XXX day of the month. This character is only allowed in the sixth field.</p> <p><b>Example:</b></p> <p>0 15 10 ? * 6#3 - This will fire the job at 10:15 AM on the third Friday of every month.</p> <p>0 15 10 ? * 4#5 - This will fire the job at 10:15 AM on the fifth Wednesday of every month. Note that if there is not a fifth Wednesday, the job will not fire.</p>

## Batch Semaphore File Upload



### Batch Error Semaphore File Upload

#### Tip


Because this functionality was inherited from KFS, additional information can be found in their technical documentation located on the wiki pages [Batch 5](#) and [Batch Container 5](#).

- Currently configured to only upload error files, but can easily be configured to upload the other file types
- To upload an error file for a Step (a stage in a job) create a new text file and name it whatever you like. The first line of the file should contain the name of the job and the the name of the Step (the bean id) in the format **jobName~stepName**. This line and all subsequent lines in the file will be considered error messages and will be logged by BatchStepTrigger.
- The File Identifier is required by the upload page, but is not used so enter anything.
- Once the file is saved to the batch container directory its name will be **jobName~stepName.error**.


## Note

In KFS, the Bath Semaphore File Upload is secured by the KFS-SYS Technical Administrator role. While OLE does have a complementary role, the permission "Upload semaphoreInputFileTypeError" will need to be added to the role before using the document.

### Batch Error Semaphore File Upload

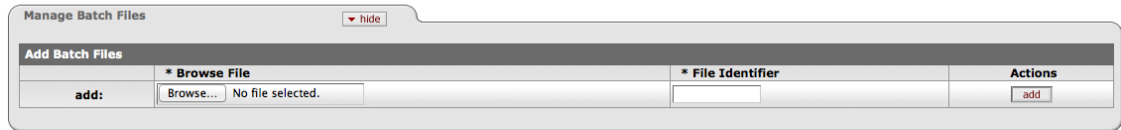

## Schedule



## Note

Please click [here](#) for technical documentation.


The Schedule option allows users to view, schedule or execute OLE batch processes (commonly called 'jobs' or 'batch jobs'). Scheduling is very necessary for OLE as there are many jobs - some running nightly, hourly, and others that only run after another job has successfully run.

## Tip

Because this functionality was inherited from KFS, additional information can be found in their technical documentation located on the wiki page [Batch 5](#).

Only members of OLE-SYS Operations or KR-SYS Technical Administrator role modify batch jobs though this interface though all users can use the batch job lookup. Members of OLE-SYS Operations can edit any existing schedule job belonging to an OLE namespace. Members of KR-SYS Technical Administrators can edit any existing schedule job belonging to the KR namespace.

When you select the **Schedule** option from the **Admin** menu, the system displays the Batch Job Lookup. This screen allows you to search for batch jobs by namespace, name, group, and statuses.

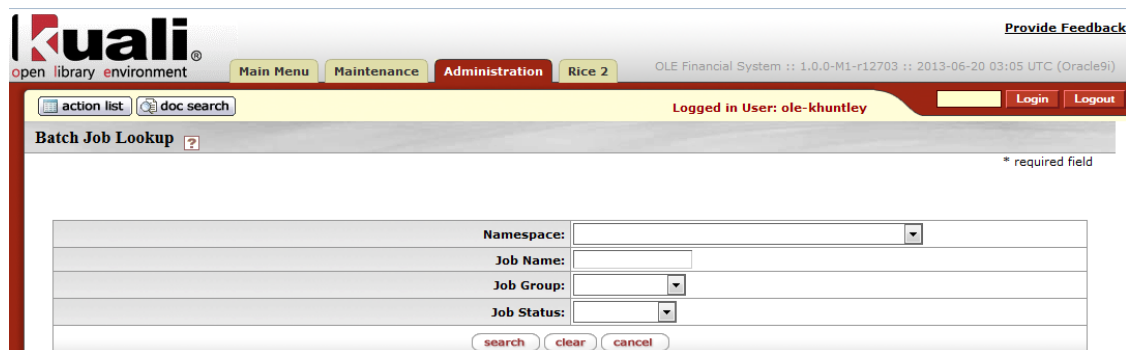

**Batch Job Lookup screen definition**

Title	Description
Namespace	Select the Namespace (application and module) the job is associated with.
Job Name	Enter the name of the job prescribed by the system.
Job Group	Select from the Job Group list. The valid selections are Scheduled: Jobs which are on the standard schedule. Jobs in this group are automatically executed by the schedulerJob. Unscheduled: Normal groups, all jobs are present in this group. These jobs must be executed manually.
Job Status	Select from the Job Status list. The valid selections are:  Scheduled: Job has been scheduled for later execution Succeeded: Job finished executing successfully Canceled: Job was canceled, either before or during execution Running: Job is currently executing Failed: Job failed during execution  For more detail about the status of a job or any problems it encountered while executing you can view its associated log file using the Batch File Lookup.

The screen returns the applicable list of jobs:

Actions	Namespace	Job Name	Job Group	Job Status	Next Run Time	Steps	Dependencies
<a href="#">Modify</a>	OLE-COA	populatePriorYearDataJob	unscheduled			updatePriorYearDataStep	
<a href="#">Modify</a>	OLE-COA	cfdaJob	unscheduled			cfdaBatchStep	
<a href="#">Modify</a>	OLE-COA	addPriorYearAccountsJob	unscheduled			addPriorYearAccountsStep	

Every OLE batch job exists in an "unscheduled" version which can be initiated manually at any time. Therefore when you look at the search results for each scheduled job, there are two results shown: one result is in the job group scheduled, and one result is in the job group unscheduled.

There are two ways to initiate a batch job: "running" and "scheduling"

Running: You can either Run a job immediately, or at a specified date/time. If you add a time and click "run", no second job is created; the job remains in the "unscheduled" Job Group although the Job Status changes to "Scheduled".

**Note**

For information about how to run a job, see the [Running Section](#) below.

Scheduling: Clicking "schedule" (under Other Commands) instead of "run" adds a second version of the job in the batch job lookup, in the Scheduled job group. You don't specify a date/time for a scheduled job (if you type one in and then click "schedule", OLE just ignores the date/time.) Instead, the timing is controlled by a specific job called "scheduleJob". Its function is to run all the other jobs in the Scheduled job group. It reads the dependencies listed for each job it runs, so it can run them in the right order.

There is a parameter, OLE-SYS CUTOFF\_TIME, which controls when the daily batch schedule should terminate. If schedulejob does not complete and some of the dependent jobs are stuck at "Pending", a cut-off time check, which prevents the job from overrunning, is causing the error. Adjust the time on the parameter to correct the problem.

**Note**

OLE comes with a cron job that controls the running of the job "scheduleJob". The cron job is not accessible through the UI, however it is accessible through the server. The default setting is

to run the jobs daily, at 11:00 PM. You could modify the cron job to run multiple times per day but this has not been tested and it may affect system performance. Instead, if there are particular jobs you wish to run (such as to update the GL immediately), you could run these jobs ad hoc.

Click the **Modify** link to open the Modify Batch Job maintenance e-doc.

## Document Layout

From the Modify Batch Job e-doc, you can run the standard scheduler.

**Modify Batch Job** [Return to Lookup](#)

**Job Info** hide

Job Info		Running		Other Commands
Job Name:	purchasingPreDisbursementExtractJob	Job Group:	unscheduled	<input type="button" value="unschedule"/>
Job Status:	<a href="#">Batch File lookup (to retrieve logs and reports)</a>		Start Step: <input type="text" value="1"/> End Step: <input type="text" value="2"/> Start Date/Time: <input type="text"/> Results Email Address: <input type="text"/>	
				<input type="button" value="mail to me"/> <input type="button" value="run"/>

**Steps** hide

#	Name
1	purchasingPreDisbursementImmediatesExtractStep
2	purchasingPreDisbursementExtractStep

**Dependencies** hide

autoApprovePaymentRequestsJob (softDependency)
--

### Note

When the server is restarted, the **Job Info** values revert back to the original setting unless the configuration is changed.

This e-doc contains the **Job Info** tab, the **Steps** tab, and the **Dependencies** tab.

## Job Info Tab

The **Job Info** tab displays the basic information about the job and allows you to schedule or unscheduled the job. The **Job Info** tab includes three sections: **Job Info**, **Running**, and **Other Commands**.

### Job Info Section

In addition to listing the basic information about the job, clicking the Batch File Lookup URL takes you to the Batch File Lookup screen where you may view logs and reports generated by batch jobs.

**Batch File Lookup** ?

<b>File Path:</b>	staging pdp paymentLoadSummary paymentImport bankFederalReserve paymentExtract sys batchContainer select vendortransmissionfiles bibInfo fp procurementCard purap electronicInvoice
<b>File Name:</b>	<input type="text"/>
<b>Last Modified Date From:</b>	<input type="text"/>
<b>Last Modified Date To:</b>	<input type="text"/>
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

## Note

To learn more about the Batch File Lookup screen, see [Batch File](#)

## Running Section

The **Running** section allows a user to control a job schedule. When the user has appropriate access, the Running section displays information necessary to schedule a job.

By default, when clicking the run button, the system runs all steps of the job immediately or you may schedule the job to start at the specified date and time.

## Note

These parameters can be modified to only run a subset of steps on a job (shown in the **Steps** tab).

## Warning

When manually running a job, job dependencies are not considered. Caution should be exercised that all necessary data that are normally added by the prerequisite jobs are set up to ensure a successful job run.

**Running**

Start Step:	<input type="text" value="1"/>
End Step:	<input type="text" value="2"/>
Start Date/Time:	<input type="text"/>
Results Email Address:	<input type="text"/>
	<input type="button" value="mail to me"/>
	<input type="button" value="run"/>

If you want to receive an email after the job completes, fill in the email address field or click the **Mail to Me** button to populate the email address from your user profile into the field. Otherwise, an email will be sent only on job failure, and it will be sent to the batch mailing list.


## Other Commands Section

You may issue the following commands from this section:

- Click  to remove the job from the scheduled group. Clicking 'Unschedule' will remove the job from the scheduled group even if you are viewing an unscheduled version of the job when you click it.
- If a job is currently running, you can request that it be interrupted. This does not guarantee an immediate stop.

## Steps Tab

The **Steps** tab displays all the steps that make up this batch job. Steps are displayed in the order they are performed.

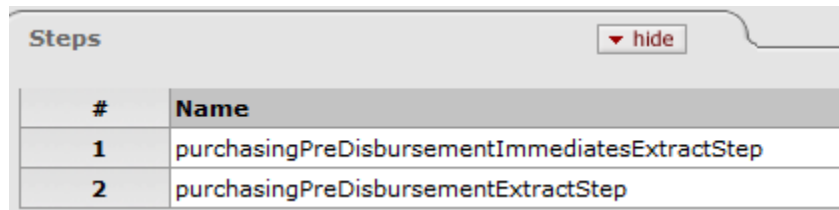

The screenshot shows a tab labeled "Steps" with a "hide" button. Below the tab is a table with two columns: "#", "Name".

#	Name
1	purchasingPreDisbursementImmediatesExtractStep
2	purchasingPreDisbursementExtractStep

## Dependencies Tab

The **Dependencies** tab displays all the other jobs on which the scheduled version of the current job depends. Batch jobs can have hard or soft dependencies. A soft dependency means that this job will not run until that dependent job has completed, but will run regardless of whether or not the job it depends on completed successfully. A hard dependency indicates that the job must not only complete before this job runs but it must complete successfully.

Note that you can run an unscheduled job without regard to the specified dependencies. The job will run automatically when the **run** button is clicked.



The screenshot shows a tab labeled "Dependencies" with a "hide" button. Below the tab is a text box containing the text "autoApprovePaymentRequestsJob (softDependency)".

autoApprovePaymentRequestsJob (softDependency)
--

## Tentative List of Select and Acquire jobs to be scheduled

### Note

This list is a work in progress. For a working list of all Batch Jobs and additional information about them, see [https://docs.google.com/a/kuali.org/spreadsheet/ccc?key=0AuCs4Q8X\\_DXJdHhqe1c1Skwya2JpckpfYzY4bHVnQ2c](https://docs.google.com/a/kuali.org/spreadsheet/ccc?key=0AuCs4Q8X_DXJdHhqe1c1Skwya2JpckpfYzY4bHVnQ2c). You will need a KIS account to access this document.



accountTemporaryRestrictedNotifyJob  
approveLineItemReceivingJob  
autoApprovePaymentRequestsJob  
autoClosePurchaseOrdersJob  
autoCloseRecurringOrdersJob  
autoDisapproveJob  
clearPendingEntriesJob  
closeJob  
collectorJob  
disbursementVoucherPreDisbursementProcessorExtractJob  
electronicInvoiceExtractJob  
enterpriseFeedJob  
faxPendingDocumentJob  
nightlyOutJob  
nominalActivityClosingJob  
pdpClearPendingTransactionsJob  
pdpDailyReportJob  
pdpExtractAchPaymentsJob  
pdpExtractCanceledChecksJob  
pdpExtractGITransactionsStepJob  
pdpInactivatePayeeAchAccountsJob  
pdpLoadFederalReserveBankDataJob  
pdpLoadPaymentsJob  
pdpNightlyLoadPaymentsJob  
pdpSendAchAdviceNotificationsJob  
populatePriorYearDataJob  
posterBalancingJob posterJob  
processPdpCancelsAndPaidJob  
procurementCardDocumentJob  
purchasingPreDisbursementExtractJob  
purgeJob  
purgeReportsAndStagingJob

receivingPaymentRequestJob

scheduleJob

scrubberJob

sufficientFundsAccountUpdateJob

To run GL jobs ad hoc, this is the list of jobs. They must be ran in order, to make sure the dependencies work. (Sites might want to do this at the very end of the fiscal year, for instance, in order to see expenditures update several times a day.)

enterpriseFeedJob

nightlyOutJob

collectorJob

sufficientFundsAccountUpdateJob

scrubberJob

pdpClearPendingTransactionsJob

posterJob

posterBalancingJob

clearPendingEntriesJob

processPdpCancelsAndPaidJob

purchasingPreDisbursementExtractJob

disbursementVoucherPreDisbursementProcessorExtractJob

pdpNightlyLoadPaymentsJob

## Special Batch File Upload

**Admin** > **Batch Processes** > **OLE FS Batch** >  
Special Batch File Upload > **Batch File Lookup**

## Compute Courtesy and Overdue Notice Dates for Loans

**Admin** > **Batch Processes** > **OLE FS Batch** >  
Compute Loan Overdue Notice Dates >

# Compute courtesy and overdue


The Compute Courtesy and Overdue Notice Dates for Loans screen allows users to update the notice table for existing loan records. During implementation, the loan table (OLE\_DLVR\_LOAN\_T) and the notice table (OLE\_DLVR\_LOAN\_NOTICE\_T) could be populated while loading institutional data. However, if your institution has not done so or if you need to repopulate the notice table, you may do it through this interface.

### Note

The Courtesy and Overdue notices are dependent on your KRMS circulation policies. The notice table relies on the loan periods that are described in the policies.

Click **run** to trigger OLE's scan of loan documents in the loan table and update the notice table.

# Compute courtesy and overdue



You will not receive any feedback from the interface that the tables are getting updated. To see changes, check your [Deliver Notices](#) after some time (it could take an hour or two).

### Note

Deliver Notices documentation is available in the [Guide to the OLE Deliver Module](#).

---

# Chapter 2. Monitoring Administrative Documents

## Service Bus

- [Cache Admin](#)
- [Configuration Viewer](#)
- [Java Melody](#)
- [Message Queue](#)
- [Quartz](#)
- [Security Management](#)
- [Service Registry](#)
- [Thread Pool](#)

## Workflow

- [Document Operation](#)
- [Statistics Report](#)



The items in the Monitoring submenu pertain to the Kualu Service Bus and the Kualu Enterprise Workflow (KEW) as well as the Application Server.


An Enterprise Service Bus is a middleware architecture construct which allows for integrating enterprise applications in an implementation-independent fashion. The Kualu Service Bus (KSB) specifically provides a messaging fabric as well as allowing acquisition of services on the bus using a service registry and invocation of those services using various protocols (java serialization over HTTP and SOAP). Because these are primarily technical operations, they are not covered in great detail here.

Use of these options is restricted to users with the KR-SYS Technical Administrator role.

## Cache Management



### Cache Management

The Cache Management tool is used to clear all or individual local system caches. Users may select specific or all caches and click .

#### Tip

Click the arrow on the left of the checkbox to expand the list.

## Document Layout

### Cache Management

Check the boxes for the caches to flush:

<input type="checkbox"/>	coreServiceDistributedCacheManager
<input type="checkbox"/>	kewDistributedCacheManager
<input type="checkbox"/>	kimDistributedCacheManager
<input type="checkbox"/>	locationDistributedCacheManager
<input type="checkbox"/>	ole.core.DistributedCacheManager

## Configuration Viewer

**Admin** > **Monitoring** > **Service Bus** >  **Configuration Viewer** >

### Configured Properties:

The Configuration Viewer is used to review a table of configured properties. Click **Refresh Page** to update the values.

## Document Layout

**workflow** [Refresh Page](#)

### Configured Properties:

Config Key	Config Value
ActionList.norefresh	false
DATE_TO_STRING_FORMAT_FOR_FILE_NAME	yyyyMMdd
DATE_TO_STRING_FORMAT_FOR_USER_INTERFACE	MM/dd/yyyy
KualiExceptionIncidentServiceImpl.REPORT_MAIL_LIST	
PREORDER_CITATION_OPR	createPreOrderForCitation
PREORDER_NAMESPACE	http://service.select.ole.kuali.org/
PREORDER_OPENURL_OPR	createPreOrderForOpenURL
PREORDER_PORTNAME	preOrderService
PREORDER_SERVICENAME	preOrderService
PREORDER_URL	http://tst.ole.kuali.org/remoting/preOrderService
PREORDER_WFRM_OPR	createPreOrderForForm
RouteQueue.maxRetryAttempts	3
RouteQueue.timeIncrement	1000
Routing.ImmediateExceptionRouting	false
STRING_TO_DATE_FORMATS	yyyy-MM-dd;MM/dd/yyyy hh:mm a;MM/dd/yy;MM/dd/yyyy;MM-dd-yy;MM-dd-yyyy;MMddy;MMMM dd;yyyy;MM/dd/yy HH:
STRING_TO_TIMESTAMP_FORMATS	MM/dd/yyyy hh:mm a;MM/dd/yy;MM/dd/yyyy;MM-dd-yy;MMddy;MMMM dd;yyyy;MM/dd/yy HH:mm:ss;MM/dd/yyyy HH:m
TIMESTAMP_TO_STRING_FORMAT_FOR_FILE_NAME	yyyyMMdd-HH-mm-ss-S

## Java Melody

**Admin** > **Monitoring** > **Service Bus** > **Java Melody** >



**Statistics of JavaMelody monitoring taken at 3/11/14 10:4**

# Message Queue



The Message Queue allows administrators to monitor messages that are flowing through the Service Bus. Messages can be edited, deleted or forwarded to other machines for processing from this screen.

**workflow** [Refresh Page](#)

Current Node Info  
IP Address: 10.147.198.103  
Application ID: OLE  
message.persistance: true  
message.delivery: async  
message.off: false

Message ID:   
Service Name:   
Application ID:   
IP Number:   
Queue Status:   
App Specific Value 1:   
App Specific Value 2:

Documents currently in route queue: 3  
3 items retrieved, displaying all items.

Message Queue Id	Service Name	Application ID	IP Number	Queue Status	Queue Priority	Queue Date	Expiration Date	Retry Count	App Specific Value 1	App Specific Value 2	Actions
708	{http://rice.kuali.org/kew/v2_0}documentProcessingQueue	OLE	10.147.198.103	EXCEPTION	5	06:11 AM 06/21/2013	06:11 AM 06/21/2013	1	4663		<a href="#">View</a> <a href="#">Edit</a> <a href="#">ReQueue</a>
561	{http://rice.kuali.org/kew/v2_0}documentProcessingQueue	OLE	10.147.198.103	EXCEPTION	5	08:29 AM 06/12/2013	08:29 AM 06/12/2013	1	3339		<a href="#">View</a> <a href="#">Edit</a> <a href="#">ReQueue</a>
540	{http://rice.kuali.org/kew/v2_0}documentProcessingQueue	OLE	10.147.198.103	EXCEPTION	5	05:27 PM 06/11/2013	05:27 PM 06/11/2013	1	3315		<a href="#">View</a> <a href="#">Edit</a> <a href="#">ReQueue</a>

**Message**

Message Queue Id: 10500  
Status: E  
Date: 03:20 PM 09/22/2009  
Expiration Date:  
Priority: 3  
Retry Count: 3  
IP Number: 129.79.216.129  
Service Name: OSCacheNotificationService  
Service Namespace: KFS  
Method Name: invoke  
App Specific Value 1:  
App Specific Value 2:

**Payload**

Payload Class: class org.kuali.rice.ksb.messaging.AsynchronousCall  
Method Name: invoke  
ignoreStoreAndForward: false  
ServiceInfo.messageEntryId: 5457  
ServiceInfo.serviceNamespace: RICE  
ServiceInfo.serverIp: 10.64.87.165  
ServiceInfo.ServiceName: OSCacheNotificationService  
ServiceInfo.endpointUrl: http://localhost:8080/kr-dev/remoting/OSCacheNotificationService  
ServiceInfo.queue: false  
ServiceInfo.alive: true  
ServiceInfo.priority: 3  
ServiceInfo.retryAttempts: 3  
ServiceInfo.millisToLive: -1  
ServiceInfo.messageExceptionHandler: org.kuali.rice.ksb.messaging.exceptionhandling.DefaultMessageExceptionHandler  
ServiceInfo.service.class:  
ServiceInfo.busSecurity: true  
ServiceInfo.credentialsType:  
Arguments: [java.io.Serializable] type=2, data=SystemParameterProxy

## Quartz



Quartz provides a means by which an administrator can schedule delayed tasks, including retry attempts for messages that cannot be sent the first time.

## Security Management



The Security Management provides a means by which an administrator can generate a keystore in the Kuali Service Bus (KSB).

**workflow** [Refresh Page](#)


**Create new Client Keystore file:**

Desired Alias (must be unique from list below):	<input type="text"/>
Password (will be used for keys as well as keystore):	<input type="password"/>
Re-Enter Password:	<input type="password"/>
<input type="button" value="create"/> <input type="button" value="clear fields"/>	

**Existing Keystore Entries:**  
One item retrieved.

Alias	Create Date	Type	Actions
rice	01:59 PM 10/10/2007	Private Key	

## Service Registry



The Service Registry displays a read-only view of the Service Bus's Service Registry. The Service Registry shows all services that are exposed on the Service Bus and includes information about them (such as IP Address, endpoint URL, etc.). The Service Registry also includes an administrative function which allows the administrator to refresh its view of the registry.

**workflow** [Refresh Page](#)

**Current Node Info**


Application ID: OLE  
IP Address: 10.154.185.108  
Instance ID: OLE-10.154.185.108  
dev.mode: false

Service Name	Endpoint URL	Application ID	Service Version	Type
{OLE}OLEDocumentSearchCustomizer	http://tst.ole.kuali.org/remotina/OLEDocumentSearchCustomizer	OLE	2.2.0	SOAP
{OLE}OLEPurapDocumentSearchCustomizer	http://tst.ole.kuali.org/remotina/OLEPurapDocumentSearchCustomizer	OLE	2.2.0	SOAP
{OLE}OLESearchableAttribute	http://tst.ole.kuali.org/remotina/OLESearchableAttribute	OLE	2.2.0	SOAP
{OLE}PurapFinancialSystemSearchableAttribute	http://tst.ole.kuali.org/remotina/PurapFinancialSystemSearchableAttribute	OLE	2.2.0	SOAP
{OLE}PurchaseOrderActionListAttribute	http://tst.ole.kuali.org/remotina/PurchaseOrderActionListAttribute	OLE	2.2.0	SOAP

## Thread Pool



The Thread Pool provides a means by which an administrator can change the size of the Thread Pool used by the Service Bus for processing messages.



Core Pool Size:   
Maximum Pool Size:   
Pool Size: 20  
Active Count: 0  
Largest Pool Size: 20  
Keep Alive Time: 60000  
Task Count: 1713  
Completed Task Count: 1713  
RouteQueue.TimeIncrement:   
RouteQueue.maxRetryAttempts:   
 Execute Across All Servers with Service Namespace KFS

## Document Operation



The **Document Operation** screen allows for low-level modifications to document data; users can manually move a particular document to the next step in the workflow, refresh the document, etc.


In certain scenarios or failure cases it may be necessary to make modifications to the document so that the state of the document in the KEW system is consistent with that of OLE. It may also be necessary to make modifications to the XML content of a document if, for example, there is a bug in the application integrating with KEW which results in incomplete or insufficient XML content to allow for proper routing.

### Tip

In KFS, Document Operation is restricted to very few users and is used primarily to requeue documents when a fiscal officer leaves and has things remaining in their Action List. After the account is updated with the new fiscal officer, KFS system admin will requeue the documents and then the system puts them in the new fiscal officer's Action List.

Instead of trying to push documents through the workflow with Document Operation, KFS users try to use Super User instead.





**Operate on a document**

*Document ID:	<input type="text" value="317123"/>
<input type="button" value="get document"/> <input type="button" value="clear"/>	

Enter the document ID you are searching for and click  .

The administrator is then presented with a view of the document and can perform various operations on it. The screen is divided into various sections, including:

- Document Actions - Additional functions for reassigning and reprocessing document
- Document - simple data associated with the document
- Action Requests - the Action Requests associated with the document, includes requests for action which have already been satisfied
- Actions Taken - The actions that have been taken against this document (i.e. Approved by user X)
- Action Items - Items related to this document that are in users' Action Lists
- Route Node Instances - The node instances that form the document's instantiated route path
- Branch States - The branches on this document and the state of those branches
- Annotation - An annotation that will show up on the Route Log when the operation is performed.

## Document Action

Document Actions	
Flush Rule Cache <input type="button" value="submit"/>	
Queue Document <input type="button" value="submit"/>	
Index Searchable Attributes <input type="button" value="submit"/>	
Queue Document Requirer <input type="button" value="submit"/>	
Queue Document Blanket Approve <input type="button" value="submit"/>	User: <input type="text"/>
Queue Document Move <input type="button" value="submit"/>	Action Taken Id: <input type="text"/>
	Node Names: <input type="text"/>
Queue Action Invocation <input type="button" value="submit"/>	User: <input type="text"/>
	Action Item Id: <input type="text"/>
	Action Code: <input type="text"/>

Monitoring  
Administrative Documents

**Document Action definitions**

Title	Description
Queue Document	Requeuing and reprocessing the document by the engine
Index Searchable Attributes	Update searchable data of the document
Queue Document Requeuer	Refresh document and regenerate request of current node
Queue Document Blanket Approve	<p>Move blanket approve document forward; User, Action Taken Id, and Node Names are required</p> <ul style="list-style-type: none"> <li>• User - Enter initiator's network Id</li> <li>• Action Taken Id - Enter an entry's action taken Id</li> <li>• Node Names - Enter a comma separated list of node names</li> </ul>
Queue Action Invocation	<p>Reassign action request based on initiator, entry ID, and action code; User, Action Item Id, and Action Code are required</p> <ul style="list-style-type: none"> <li>• User - Enter initiator's network Id</li> <li>• Action Item Id - Enter an entry's action item Id</li> <li>• Action Code - A, F, K, or C; A for Approve, F for FYI, K for acknowledge, and C for Complete</li> </ul>

## Document

Document	
<b>Document ID: 331500</b>	<input type="radio"/> Update <input checked="" type="radio"/> No Operation
* Document Version:	<input type="text" value="1"/>
* Initiator ID:	<input type="text" value="1617103986"/>
* Initial Route Node Instances:	<input type="text" value="563377067"/>
* Route Status:	<input type="text" value="ENROUTE"/>
* Route Level:	<input type="text" value="1"/>
* Create Date:	<input type="text" value="03/10/2009"/>
* Doc Status Modification Date:	<input type="text" value="03/10/2009"/>
Approved Date:	<input type="text"/>
Finalized Date:	<input type="text"/>
Route Status Modification Date:	<input type="text"/>
Route Level Modification Date:	<input type="text"/>
Doc Type ID:	<input type="text" value="320834"/>
Doc Title:	<input type="text" value="Distribution Of Income"/>
Application Doc ID:	<input type="text"/>
Doc Content:	<pre>&lt;documentContent&gt;&lt;applicationContent&gt;&lt;org.kuali.rice.kns.workflow.KualiDocumentXmlMaterializer/&gt;&lt;/applicationContent&gt;&lt;/documentContent&gt;</pre>

**Document definitions**

Title	Description
Document Version	A legacy field
Initiator ID	The workflow id of the initiator
Initial Route Node Instances	The ID of the initial route node instance on the document
Route Status	The current status of the document
Route Level	A legacy field providing a numerical representation of where the document is in the route path
Create Date	The initial date the document was created, doesn't not reflect whether the document was routed, saved, etc.

## Monitoring Administrative Documents

Doc Status Modification Date	The date at which the document's status was last modified
Approval Date	The date at which the document's state transitioned to APPROVED
Finalized Date	The date at which the document's state transitioned to FINAL
Route Status Modification Date	Legacy value, similar to Doc Status Modification Date
Route Level Modification Date	Legacy value, no longer used
Doc Type ID	The ID of the DocumentType definition for this document
Doc Title	The title of the document
Application Doc ID	A special id that can be set by client applications to associate the document to an ID in their system
Doc Content	The XML Content of the document

## Action Requests

Action Requests	
<b>Action Request ID: 3013</b>	<input type="radio"/> Update <input type="radio"/> Delete <input checked="" type="radio"/> No Operation
* Document Version:	1
* Document ID:	3646
* Route Node Instance ID:	7910
* Action Requested:	COMPLETE
* Create Date:	09/23/2009
* Status:	ACTIVE
* Priority:	0
* Route Level:	0
* Responsibility ID:	-3
Responsibility Description:	Initiator needs to comp
Action Request Parent ID:	
Recipient Type:	person
Person ID:	3420506415
Workgroup ID:	
Role Name:	
Qualified Role Name:	
Qualified Role Label:	
Action Taken ID:	
Force Action:	Yes
Approve Policy:	F
Delegation Type:	
Current Indicator:	Yes
Annotation:	

### Action Request definitions

Title	Description
Document Version	A legacy field
Initiator ID	The workflow id of the initiator
Route Node Instance ID	The ID of the node instance that this request is attached to
Action Request	The type of action that is requested
Create Date	The date the request was created
Status	The current status of the request

Monitoring  
Administrative Documents

Priority	The activation priority of the request
Route Level	A legacy field providing a numerical representation of where in the route path the request was generated
Responsibility ID	The id of the responsibility associated with this request (relates to Rules and/or Route Modules)
Responsibility Description	A description of the responsibility of this request
Action Request Parent ID	ID of the parent action request if there is one
Recipient Type	The type of recipient for this request (user, workgroup, or role)
Person ID	If the recipient type is "user", the workflow id of the user recipient
Workgroup ID	If the recipient type is "workgroup", the workgroup id of the workgroup recipient
Role Name	If the recipient type is "role", the name of the role
Qualified Role Name	If the recipient type is "role", the value of the qualified role
Qualified Role Label	If the recipient type is "role", the label for the qualified role
Action Taken ID	If this request has been satisfied, the id of the ActionTaken that satisfied the request
Ignore Previous	The ignore previous indicator of the request
Approve Policy	The approve policy of the request (only used by role requests)
Delegation Type	If the request is a delegation, the type of delegation (primary or secondary)
Current Indicator	Indicates if the request is "Current" or not
Annotation	The value of the annotation on the request

## Actions Taken

Actions Taken	
<b>Action Taken ID: 12742</b>	<input type="radio"/> Update <input type="radio"/> Delete <input checked="" type="radio"/> No Operation
* Document ID:	<input type="text" value="331494"/>
* Document Version:	<input type="text" value="1"/>
* Action Taken:	BLANKET APPROVED <input type="button" value="v"/>
* Action Date:	<input type="text" value="03/10/2009"/> <input type="button" value="calendar"/>
* Action Taken Person ID:	<input type="text" value="6162502038"/> <input type="button" value="search"/>
Delegator Person ID:	<input type="text"/> <input type="button" value="search"/>
Delegator Workgroup ID:	<input type="text"/> <input type="button" value="search"/>
Current Indicator:	<input type="text" value="Yes"/>
Annotation:	<input type="text"/>

### Actions Taken definitions

Title	Description
Document ID	The ID of the associated document
Document Version	A legacy field
Action Taken	The type of the action that was taken
Action Date	The date at which the action was taken
Action Taken Person ID	The workflow id of the user or delegate who took action

## Monitoring Administrative Documents

Delegator Person ID	If this action was performed by a delegate, the workflow id of the person whose authority was delegated
Delegator Workgroup ID	If this action was performed by a delegate, the workflow id of the Workgroup whose authority was delegated
Current Indicator	Indicates if the Action Taken is "Current" or not, non-current actions have been revoked by an action such as ReturnToPreviousNode
Annotation	The value of the annotation on the Action Taken

## Action Items

It is important to note that the Action Items is a de-normalized representation of an Action Request on the document that is used to render the Action List in an efficient matter. Therefore, it contains some copies of data from both the document and the request itself.

Action Items	
<b>Action Item ID: 10775</b>	<input type="radio"/> Update <input type="radio"/> Delete <input checked="" type="radio"/> No Operation
* Document ID:	3646
* Doc Type Name:	PREQ
* Doc Type Label:	Payment Request
* Doc Handler URL:	https://test.kuali.org/k/
* Date Assigned:	09/23/2009
* Action Request ID:	3013
* Action Requested:	COMPLETE
* Responsibility ID:	-3
* Person ID:	3420506415
Workgroup ID:	<input type="text"/>
Role Name:	<input type="text"/>
Delegator Person ID:	<input type="text"/>
Delegator Workgroup ID:	<input type="text"/>
Document Title:	Payment Request - PO

### Actions Items definitions

Title	Description
Document ID	The ID of the associated document
Doc Type Name	The name of the DocumentType for this item
Doc Type Label	The label of the document type
Doc Handler URL	The URL used to access the doc handler for this item
Date Assigned	The creation date of the item
Action Request ID	The ID of the Action Request from which this item is derived
Action Requested	The type of action requested by this item
Responsibility ID	The responsibility id of the associated request
Person ID	The workflow id of the person responsible for the item
Workgroup ID	The workgroup id of the workgroup responsible for the item
Role Name	If the item was derived from a role request, the name of the role
Delegator Person ID	If the item was delegated, the workflow id of the delegating party
Delegator Workgroup ID	If the item was delegated, the workgroup id of the delegating party
Document Title	The title of the document

## Route Node Instances

The Route Node Instances are modeled as a Directed Acyclic Graph starting at the node instance pointed to by the Initial Route Node Instances field in the Document section. Therefore, if you delete a route node instance, it will follow all links through its set of Next Route Node Instances and delete those as well.

Route Node Instances	
<b>Route Node Instance ID: 563358013</b>	<input type="radio"/> Update <input type="radio"/> Delete <input checked="" type="radio"/> No Operation
Instance Name:	Adhoc Routing
Active Indicator:	<input type="text" value="true"/>
Complete Indicator:	<input type="text" value="false"/>
Initial Indicator:	<input type="text" value="false"/>
Previous Route Node Instances:	None
Next Route Node Instances:	None
Route Node States:	None

### Route Node Instances definitions

Title	Description
Instance Name	The name of the node
Active Indicator	Indicates if the node is active
Complete Indicator	Indicates if the node's processing has completed
Initial Indicator	Indicates if the node has been processed by the engine yet
Previous Route Node Instances	A comma-separated display of the IDs of the previous Route Node Instances of the node
Next Route Node Instances	A comma-separated display of the IDs of the next Route Node Instances of the node
Route Node States	A representation of the state attached to the node

## Branch States

All documents are required to have at least one branch that is named PRIMARY. Therefore, it is advisable to not rename the PRIMARY branch.

Branch States	
<b>Branch ID: 563377051</b>	<input type="radio"/> Update <input checked="" type="radio"/> No Operation
Branch Name:	<input type="text" value="PRIMARY"/>
Branch State ID: 563377053	Key: <input type="text" value="System.PostProcessorF"/> <input type="button" value="delete 563377053"/> Value: <input type="text" value="true"/>
Branch State ID: 563377054	Key: <input type="text" value="System.PostProcessorF"/> <input type="button" value="delete 563377054"/> Value: <input type="text" value="true"/>

### Branch States definitions

Title	Description
Branch Name	The name of the branch
Branch State ID	The ID of that piece of branch state
Branch State Key	The key of the branch state
Branch State Value	The value of the branch state

## Annotation

Here you can enter an annotation explaining the changes being made. This will be logged on the Route Log so that it can be preserved as part of the audit trail for the document.

Annotation for Admin Change	
Annotation:	<input type="text"/>

Once the changes have been made on the document operation screen, hit the Save button and the changes will be executed on the server. Remember that in order for a change to take place the appropriate radio button must be selected on the data that requires modification.

## Statistics Report



The Statistics Report displays the counts of documents and users for various statuses and categories.

## Monitoring Administrative Documents

### Workflow Statistics

Aggregates																																																																																																															
<b>Number of Document Types:</b>	319																																																																																																														
<b>Number of Users:</b>	11																																																																																																														
<b>Number of Active Items In All Action Lists:</b>	269																																																																																																														
<b>Number of Documents Initiated in the Last 30 Days:</b>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr><td>OLE_DI</td><td style="text-align: right;">2</td></tr> <tr><td>OLE_REQTYPE</td><td style="text-align: right;">1</td></tr> <tr><td>ParameterTypeMaintenanceDocument</td><td style="text-align: right;">2</td></tr> <tr><td>OLE_PE</td><td style="text-align: right;">3</td></tr> <tr><td>OLE_ROOM</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_MOTD</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_SRYP</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_RPTC</td><td style="text-align: right;">2</td></tr> <tr><td>OLE_TF</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_PMBA</td><td style="text-align: right;">2</td></tr> <tr><td>OLE_PREQ</td><td style="text-align: right;">32</td></tr> <tr><td>OLE_OBJC</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_GSOB</td><td style="text-align: right;">2</td></tr> <tr><td>OLE_RCVL</td><td style="text-align: right;">27</td></tr> <tr><td>OLE_PO</td><td style="text-align: right;">402</td></tr> <tr><td>OLE_PMSN</td><td style="text-align: right;">1</td></tr> <tr><td>ParameterMaintenanceDocument</td><td style="text-align: right;">2</td></tr> <tr><td>OLE_DV</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_PMVC</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_SACC</td><td style="text-align: right;">2</td></tr> <tr><td>NamespaceMaintenanceDocument</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_ACQS</td><td style="text-align: right;">12</td></tr> <tr><td>OLE_IB</td><td style="text-align: right;">2</td></tr> <tr><td>OLE_PMALST</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_SOPT</td><td style="text-align: right;">5</td></tr> <tr><td>OLE_ACCT</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_PMVT</td><td style="text-align: right;">2</td></tr> <tr><td>OLE_PMCA</td><td style="text-align: right;">2</td></tr> <tr><td>OLE_PMPT</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_FFD</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_BA</td><td style="text-align: right;">3</td></tr> <tr><td>OLE_PMST</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_ACQBTHUPLOAD</td><td style="text-align: right;">22</td></tr> <tr><td>OLE_CM</td><td style="text-align: right;">3</td></tr> <tr><td>OLE_INVCSBTYP</td><td style="text-align: right;">7</td></tr> <tr><td>OLE_PYMNTMTHD</td><td style="text-align: right;">2</td></tr> <tr><td>OLE_FLU</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_AV</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_PMCP</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_GACC</td><td style="text-align: right;">1</td></tr> <tr><td>CountryMaintenanceDocument</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_APRD</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_ORDQU</td><td style="text-align: right;">5</td></tr> <tr><td>IdentityManagementGroupDocument</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_PVEN</td><td style="text-align: right;">12</td></tr> <tr><td>OLE_REQS</td><td style="text-align: right;">352</td></tr> <tr><td>OLE_CR</td><td style="text-align: right;">4</td></tr> <tr><td>DocumentTypeDocument</td><td style="text-align: right;">78</td></tr> <tr><td>OLE_OSTY</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_CSPR</td><td style="text-align: right;">2</td></tr> <tr><td>OLE_INVCTYP</td><td style="text-align: right;">1</td></tr> <tr><td>ComponentMaintenanceDocument</td><td style="text-align: right;">2</td></tr> <tr><td>OLE_CCTY</td><td style="text-align: right;">1</td></tr> <tr><td>CountyMaintenanceDocument</td><td style="text-align: right;">1</td></tr> <tr><td>OLE_CCR</td><td style="text-align: right;">1</td></tr> </tbody> </table>	OLE_DI	2	OLE_REQTYPE	1	ParameterTypeMaintenanceDocument	2	OLE_PE	3	OLE_ROOM	1	OLE_MOTD	1	OLE_SRYP	1	OLE_RPTC	2	OLE_TF	1	OLE_PMBA	2	OLE_PREQ	32	OLE_OBJC	1	OLE_GSOB	2	OLE_RCVL	27	OLE_PO	402	OLE_PMSN	1	ParameterMaintenanceDocument	2	OLE_DV	1	OLE_PMVC	1	OLE_SACC	2	NamespaceMaintenanceDocument	1	OLE_ACQS	12	OLE_IB	2	OLE_PMALST	1	OLE_SOPT	5	OLE_ACCT	1	OLE_PMVT	2	OLE_PMCA	2	OLE_PMPT	1	OLE_FFD	1	OLE_BA	3	OLE_PMST	1	OLE_ACQBTHUPLOAD	22	OLE_CM	3	OLE_INVCSBTYP	7	OLE_PYMNTMTHD	2	OLE_FLU	1	OLE_AV	1	OLE_PMCP	1	OLE_GACC	1	CountryMaintenanceDocument	1	OLE_APRD	1	OLE_ORDQU	5	IdentityManagementGroupDocument	1	OLE_PVEN	12	OLE_REQS	352	OLE_CR	4	DocumentTypeDocument	78	OLE_OSTY	1	OLE_CSPR	2	OLE_INVCTYP	1	ComponentMaintenanceDocument	2	OLE_CCTY	1	CountyMaintenanceDocument	1	OLE_CCR	1
OLE_DI	2																																																																																																														
OLE_REQTYPE	1																																																																																																														
ParameterTypeMaintenanceDocument	2																																																																																																														
OLE_PE	3																																																																																																														
OLE_ROOM	1																																																																																																														
OLE_MOTD	1																																																																																																														
OLE_SRYP	1																																																																																																														
OLE_RPTC	2																																																																																																														
OLE_TF	1																																																																																																														
OLE_PMBA	2																																																																																																														
OLE_PREQ	32																																																																																																														
OLE_OBJC	1																																																																																																														
OLE_GSOB	2																																																																																																														
OLE_RCVL	27																																																																																																														
OLE_PO	402																																																																																																														
OLE_PMSN	1																																																																																																														
ParameterMaintenanceDocument	2																																																																																																														
OLE_DV	1																																																																																																														
OLE_PMVC	1																																																																																																														
OLE_SACC	2																																																																																																														
NamespaceMaintenanceDocument	1																																																																																																														
OLE_ACQS	12																																																																																																														
OLE_IB	2																																																																																																														
OLE_PMALST	1																																																																																																														
OLE_SOPT	5																																																																																																														
OLE_ACCT	1																																																																																																														
OLE_PMVT	2																																																																																																														
OLE_PMCA	2																																																																																																														
OLE_PMPT	1																																																																																																														
OLE_FFD	1																																																																																																														
OLE_BA	3																																																																																																														
OLE_PMST	1																																																																																																														
OLE_ACQBTHUPLOAD	22																																																																																																														
OLE_CM	3																																																																																																														
OLE_INVCSBTYP	7																																																																																																														
OLE_PYMNTMTHD	2																																																																																																														
OLE_FLU	1																																																																																																														
OLE_AV	1																																																																																																														
OLE_PMCP	1																																																																																																														
OLE_GACC	1																																																																																																														
CountryMaintenanceDocument	1																																																																																																														
OLE_APRD	1																																																																																																														
OLE_ORDQU	5																																																																																																														
IdentityManagementGroupDocument	1																																																																																																														
OLE_PVEN	12																																																																																																														
OLE_REQS	352																																																																																																														
OLE_CR	4																																																																																																														
DocumentTypeDocument	78																																																																																																														
OLE_OSTY	1																																																																																																														
OLE_CSPR	2																																																																																																														
OLE_INVCTYP	1																																																																																																														
ComponentMaintenanceDocument	2																																																																																																														
OLE_CCTY	1																																																																																																														
CountyMaintenanceDocument	1																																																																																																														
OLE_CCR	1																																																																																																														

Date Range	
Begin Date: <input style="width: 100px;" type="text" value="01/01/1900"/>	End Date: <input style="width: 100px;" type="text" value="01/01/2400"/>
Routing Status	Number of Documents for Date Range
CANCELED:	0
DISAPPROVED:	0
ENROUTE:	19
EXCEPTION:	0
FINAL:	425
INITIATED:	540
PROCESSED:	1
SAVED:	35



---

# Chapter 3. Services and Functions

## Administrative Documents



## Discovery Service



The Discovery Service allows users to search the DocStore database and test the RESTful API and SOLR Indexing.

### Note

In order to index and reindex bibliographic, holdings, e-holdings, and item records in Solr, go to <http://demo.docstore.ole.kuali.org/admin.jsp> (or <http://tst.docstore.ole.kuali.org/admin.jsp> if you are in the tst environment).

Click the **Start** button.

Click **Show Status** button to see the status.


Indexing is complete when you see the "Index End Time"



The Grey tabs are explained here:

- **Summary** tab: Shows the summary of record count for each category, type and format
- **Test RESTful API** tab: Allows users to test the Get and Delete methods of the REST web services.
- **Sample SOLR queries** tab: Displays some sample queries' data for SOLR.
- **Admin Pages** tab: Contains administrative links for SOLR.

Click the **OLE** tab to return to OLE's main portal.

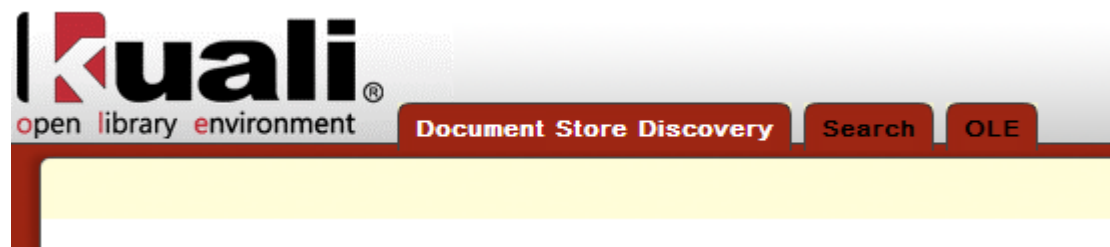

# Document Store Search

## Performing a Document Store Search

From the **Search** tab, bibliographic data in the DocStore can be searched in a variety of ways. Select options from the drop down menus and enter information to refine the search.

### Advanced Search

Document Category  Sort By   
 Document Type   
 Document Format

The following special characters ~,!,(,),{,},[,],',:,- are ignored in search text.

All of these  in Search Field:

AND  OR  NOT

All of these  in Search Field:

AND  OR  NOT

All of these  in Search Field:

AND  OR  NOT

All of these  in Search Field:

AND  OR  NOT

All of these  in Search Field:

### Advance Search Field Definitions


Title	Description
Document Category	General category of documents being searched.  <b>Note</b>  Work is the only valid category in 1.5
Document Type	Type of documents associated with a category.  For the category <b>Work</b> , these include bibliographic, licenses, Instances, items, etc.
Document Format	Limits searches to a specific data format (i.e., MARC, Dublin Core). Defaults to <b>ALL</b> .
Sort By	Sorts the records by title, author, publication date, and relevance

Five search lines are provided in the Document Store Discovery Layer. Standard Boolean operators (AND, OR, NOT) can be chosen to combine the search terms. Truncation is not automatic in OLE 1.0; the truncation symbol is an asterisk. An asterisk can also be used as a wildcard character within a word.

### Note

*Known bug:* Special characters such as ‘&’ and ‘:’ are not recognized when searching.

## Services and Functions Administrative Documents

A default sort for the result set can be specified from either the search or the results screen. After all search and sort parameters are entered, click .



The screenshot displays a search results interface. At the top, there are buttons for 'Revise Search' and 'New Search'. The search criteria are shown as: 'Your Search: DocCategory - work DocType - bibliographic DocFormat - all Search Terms - (all\_text:(mysteries)) Limited To:(No limits applied)'. The results are sorted by 'Title (A-Z)' and show '1-3 of 3 results'. On the left, there is a 'Limit Your Search...' section with filters for Author, Subject, Format, and Language. The main area lists three results:

- 1. Agatha Christie : the woman and her **mysteries** /**  
Local Identifier: 59  
Author: Gill, Gillian  
Publisher: Berlin : Kerber Verlag, 2012.  
Description:  
Subject: Marcaccio, Fabian, 1963- Exhibitions.  
Location:  
Format: Book  
View Edit UC/DLL/Law-PR6005.H84Z8G5 1990 UC/JRL/Gen-PR6005.H84Z8G5 1990 UC/JRL/Gen-PR6005.H84Z8G5 1990
- 2. Death at Pullman /**  
Local Identifier: 120  
Author: McNamara, Frances.  
Publisher: [Forest Park, Ill.] : Allium Press of Chicago, c2011.  
Description:  
Subject: Pullman Strike, 1894 -- Fiction.  
Location:  
Format: Book  
View Edit UC/JRL/Gen-PS3613.C58583 D43 2011 UC/UCX/Order-PS3613.C58583 D43 2011 UC/JRL/Gen-PS3613.C58583 D43 2011 B-EDUC/BED-STACKS-PS3613.C5858D43 2008
- 3. **Mystery** annual.**

A short selection of fields from the bibliographic data is displayed for each title.

To refine your search, you can use the **facts** on the left-hand side of the results screen:

▼ **Author**

- Gill, Gillian (1)
- Krefelder Kunstmuseen (Germany) (1)
- McNamara, Frances. (1)

▼ **Subject**

- Detective and mystery stories -- Periodicals. (1)
- Marcaccio, Fabian, 1963- Exhibitions. (1)
- Pullman Strike, 1894 -- Fiction. (1)

▼ **Format**

- Book (2)
- Journal/Periodical (1)

▼ **Language**

Clicking on these returns a smaller, more limited search result set. Clicking on more than one facet reduces the result set even further. The facets being used for limiting results are shown at the top of the results index:

Document Store Discovery

[Revise Search](#) [New Search](#)

Your Search: **DocCategory** - work **DocType** - bibliographic **DocFormat** - all  
**SearchTerms**-(Title:(mysteries))NOT(Author:(christie))  
Limited To:Book **x** Gill, Gillian **x**

*Limit Your Search...*

1-1 of 1 results

▼ **Author**

- Gill, Gillian (1)

▼ **Subject**

1. Agatha Christie : the woman and her **mysteries** /

To remove a limit, click on the red **[x]** next to it.

The search results are then re-displayed with that limit removed.

If you need to see more titles on a screen, each entry can be collapsed to show only its titles. All entries can be collapsed at once by using the **Collapse All** link in the upper right:

## Services and Functions Administrative Documents

Revise Search New Search

Your Search: **DocCategory** - work **DocType** - bibliographic **DocFormat** - marc  
**Search Terms**-(Title:(ot\*ello))NOT(Author:(shak\*))  
Limited To:Verdi, Giuseppe, Sound recording

Limit Your Search...

Selected page: 1 Go to page

1-25 of 61 results

Sort By Pub date (new-old) Show 25  
[Expand All] | [Collapse All]

1. Selezioni da: Otello

2. Otello

3. Ballet music from Les Vêpres siciliennes, Macbeth, Don Carlos, Otello, Aida

4. Otello

Author

- Verdi, Giuseppe, (61)
- Boito, Arrigo, (15)
- Del Monaco, Mario, (9)
- Gobbi, Tito (7)
- Martinelli, Giovanni, (7)

more...

Subject

- Operas, (35)

To view more results you may slide or click on the search bar, type in a page number, or hover your mouse near the left of the **Selected page** field to use the up/down arrows. You will then need to click **Go to page**.

Selected page: 1 Go to page

1-25 of 54 results

Sort By

1. Otello Giuseppe Verdi.

OLE is designed to search data in a variety of formats. OLE contains bibliographic data in MARC and Dublin Core formats, both stored in XML. The record format is shown at the bottom of the bibliographic information.

2. Death at Pullman /

Local Identifier: 120  
Author: McNamara, Frances.  
Publisher: [Forest Park, Ill.] : Allium Press of Chicago, c2011.  
Description:  
Subject: Pullman Strike, 1894 -- Fiction.  
Location:  
Format: Book

View Edit UC/JRL/Gen-PS3613.C58583 D43 2011  
PS3613.C58583 D43 2011 B-EDUC/BED-STACKS-PS3613.C58

3. Mystery annual.


Just below the bibliographic details for each title are links to the XML versions. Click **View** to open an XML version of the record in a new window or browser tab:

## Services and Functions Administrative Documents

---

This XML file does not appear to have any style information associated with it. The document tree is shown below.

```
- <OAI-PMH xsi:schemaLocation="http://www.openarchives.org/OAI/2.0/ http://www.openarchives.org/OAI/2.0/OAI-PMH.xsd">
- <ListRecords>
- <record>
- <header>
  <identifier>oai:quod.lib.umich.edu:MIU01-010759290</identifier>
  <datestamp>2011-09-27T01:37:45Z</datestamp>
  <setSpec>hathitrust:pd</setSpec>
</header>
- <metadata>
- <oai_dc:dc xsi:schemaLocation="http://www.openarchives.org/OAI/2.0/oai_dc/ http://www.openarchives.org/OAI/2.0/oai_dc.xsd">
- <dc:title>
  Going public : what writing programs learn from engagement / edited by Shirley K. Rose, Irwin Weiser.
</dc:title>
- <dc:subject>
  English language--Study and teaching (Secondary)--United States.
</dc:subject>
<dc:subject>Language arts (Secondary)--United States.</dc:subject>
<dc:description>259 p. ;</dc:description>
<dc:publisher>Logan, Utah : Utah State University Press,</dc:publisher>
<dc:date>2010.</dc:date>
```

Click  to open the Bibliographic Editor.


### Note


For more information about the bibliographic editor, see the [Editors](#) section of the [Guide to the Describe and Manage Module](#).

### Note


Note: The View and Edit buttons will most likely change in future releases.

At any time, you may choose to revise your search or start a new search. These options are located at the top left side of the results screen.






### *Limit Your Search...*



Click the **OLE** tab to return to OLE's main portal.

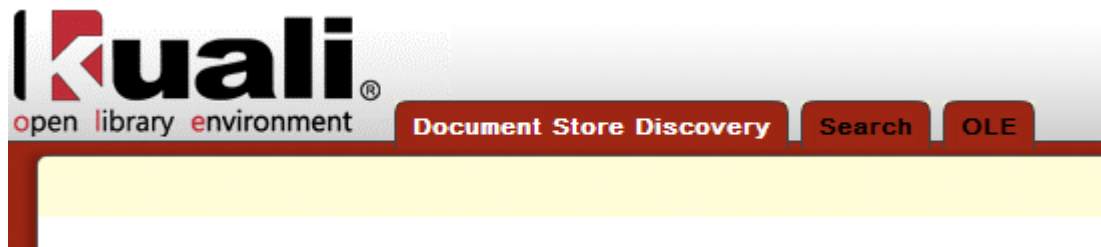

## OLE Instance Searching

Some bibliographic search results may include link(s) to one to many Instance (with Holding) and Item records, for those created during acquisitions or as part of OLE sample data:

1. Agatha Christie : the woman and her **mysteries** /

Local Identifier: 59  
Author: Gill, Gillian  
Publisher: Berlin : Kerber Verlag, 2012.  
Description:  
Subject: Marcaccio, Fabian, 1963- Exhibitions.  
Location:  
Format: Book

[View](#) [Edit](#) [UC/DLL/Law-PR6005.H84Z8G5 1990](#) [UC/JRL/Gen-PR6005.H84Z8G5 1990](#) [UC/JRL/Gen-PR6005.H84Z8G5 1990](#)

2. Death at Pullman /

Local Identifier: 120  
Author: McNamara, Frances.  
Publisher: [Forest Park, Ill.] : Allium Press of Chicago, c2011.  
Description:  
Subject: Pullman Strike, 1894 -- Fiction.  
Location:  
Format: Book

[View](#) [Edit](#) [UC/JRL/Gen-PS3613.C58583 D43 2011](#) [UC/UCX/Order-PS3613.C58583 D43 2011](#) [UC/JRL/Gen-PS3613.C58583 D43 2011](#) [B-EDUC/BED-STACKS-PS3613.C5858D43 2008](#)

You may select the **call number** link to see the Instance metadata, or link from it to further Holding or Item(s) data. There is limited data in the Item records that have been added to the Document Store. To return to the Bibliographic description, click the **Title** link.

To return to your search results, use your browser's navigation.

At present, users only have the **Search Field** option "source" available when searching Instance documents, but can further search Holdings data like below:



## Services and Functions Administrative Documents

### Advanced Search

Document Category  Sort By   
Document Type   
Document Format

The following special characters ~,!,(,),{,},[,],',:,- are ignored in search text.

All of these in Search Field:   
 AND  OR  NOT  
 All of these in Search Field:   
 AND  OR  NOT  
 All of these in Search Field:



The dropdown menu for the first search field is open, showing the following options: All, Local Identifier, Call Number, Call Number Prefix, Call Number Type Code, Call Number Type Name, Shelving Order, Uri, Holdings Note, Receipt Status Code, and Location.


Or further, test searching on Item data.

### Advanced Search

Document Category  Sort By   
Document Type   
Document Format

The following special characters ~,!,(,),{,},[,],',:,- are ignored in search text.

All of these in Search Field:   
 AND  OR  NOT  
 All of these in Search Field:   
 AND  OR  NOT  
 All of these in Search Field:   
 AND  OR  NOT  
 All of these in Search Field:

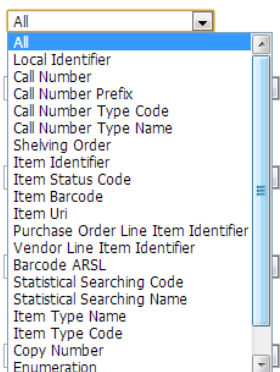



The dropdown menu for the first search field is open, showing the following options: All, Local Identifier, Call Number, Call Number Prefix, Call Number Type Code, Call Number Type Name, Shelving Order, Item Identifier, Item Status Code, Item Barcode, Item Uri, Purchase Order Line Item Identifier, Vendor Line Item Identifier, Barcode ARSL, Statistical Searching Code, Statistical Searching Name, Item Type Name, Item Type Code, Copy Number, and Enumeration.

Facets for Holdings and Item data (such as location, call number sorting, etc.) will be designed and released in the future.

### Notes and Tips on Bib, Instance and Item searching

- Breadcrumbs are planned for a later release, for now you can navigate through the DocStore but will want to make note of where you have been if you want to return to the same record.
- If you use multiple words in your search, only one gets highlighted in the search results, and it's the first word that appears in the document (not the first word in your list of search terms).
- If you search for a word in plural form, OLE will show results for the singular form as well.
- Click the **OLE** tab to return to OLE's main portal.

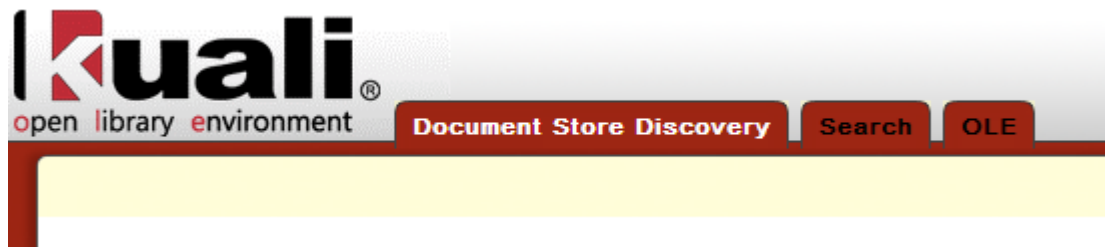

Click  to see Instance, Holdings or Items in their raw XML form. OLE will generate new Instance/Holding/Item documents during the Import or Load process or during Requisition-to-Purchase Order creation. You may also create and edit Instances through the Instance Editor.

### Note

For more information about the Instance editor, see the [Instance Editor](#) section of the [Guide to the Describe and Manage Module](#).

## DocStore Service



The functionality of Docstore is mostly used by other processes like OLE. However, for demonstration and testing docstore, this screen is provided with different functions of docstore and information about docstore.

- **Ingest:** Allows storing of documents in the document store. The input should be a Request XML with a standard schema and returns the Response XML with a list of ingested UUIDs.
- **Check-in:** Check-in functionality allows to modify the content and metadata (additional attributes) of a document identified by its UUID (Universally Unique Identifier).
- **Check-out:** This operation retrieves the content of a document given its UUID.
- **Batch Delete:** Delete records from DocumentStore based on UUIDs.

## Patron Merge



# Patron Merge

Patron Merge is used to merge two or more patron records online. Patron Merge allows a duly-authorized operator to display all records to be merged. Any records of any kind linked to a duplicate record(s) will be relinked to the survivor record.

## Process Overview

# Patron Merge

First Name :

Last Name :

Patron Type :

1. From the **Patron Merge** screen, search for the patron by **first name, last name** and/or **patron type**

2. Click 

A list of persons will appear below the search.

## Patron Merge

First Name :

Last Name :

Patron Type :

### List of Patrons

Show  entries

Survivor	Duplicate Patron	Barcode	First Name	Last Name	Patron Type
<input type="checkbox"/>	<input type="checkbox"/>	6010570003043558	Stephanie	Sample	UnderGrad
<input type="checkbox"/>	<input type="checkbox"/>	6010570001321477	Caprice	Sample	Staff
<input type="checkbox"/>	<input type="checkbox"/>	6010570003113021	Kathryn	Sample	UnderGrad
<input type="checkbox"/>	<input type="checkbox"/>	6010570002473400	Andrew	Sample	UnderGrad
<input type="checkbox"/>	<input type="checkbox"/>	6010570003130918	Jessica	Sample	Guest
<input type="checkbox"/>	<input type="checkbox"/>	6010570003050306	Benjamin	Sample	UnderGrad


Showing 1 to 6 of 6 entries

3. Select the **Survivor**, the record that will remain.

4. Select the **Duplicate Patron(s)** that will be added to the survivor record.

5.

Click



---

# Chapter 4. System Configuration Administrative Documents

Admin

> System Configuration >

## OLE

[Data Mapping Field Definition](#)

[External Data Sources \(z39.50 connection\)](#)

[Functional Field Description](#)

[Message Of The Day](#)

[System Options](#)

[Search Framework Configuration](#)

## PARAMETERS

[Namespace](#)

[Parameter](#)

[Parameter Component](#)

[Parameter Type](#)

The **System Configuration** submenu allows you to perform a variety of functional and technical activities that affect the entire system.

The **OLE** configuration submenu group provides access to high-level configuration options available to functional users. These include functions that allow authorized users to maintain the message of the day and various parameters and business rules, define many high-level definitions of a fiscal year, and perform other functions that affect users and transactions throughout the system. Some functions are only lookups, such as the ability to view data mapping fields and others are inquire screens like the Routing & Identity Management Document Type Hierarchy.

The options in the **Parameters** submenu group are used primarily by technical users to upload and configure data to maintain the Kualu Enterprise Workflow (KEW) system. Because these two options are intended for technical users, they will not be dealt with in detail here.

Use of these options is restricted to users with the KR-SYS Technical Administrator role.

## Data Mapping Field Definition

Admin

> System Configuration

> OLE

> • Data Mapping Field Definition

> Data Mapping Field Definition Lookup

The Data Mapping Field Definition lookup displays definitions related to a given field in OLE. This information includes definitions such as the functional field description, the length of the field, whether or not it is encrypted, and the name of the field at the database level

## Note

This data can only be updated by a technical resource and many of the values here are only meaningful to a technical user.

## Document Layout

**Data Mapping Field Definition Lookup** \* required field

<b>* Namespace:</b>	<input type="text"/>
<b>* Component:</b>	<input type="text"/>
<b>Field:</b>	<input type="text"/>
<b>Description:</b>	<input type="text"/>
<b>Database Table Name:</b>	<input type="text"/>
<b>Database Field Name:</b>	<input type="text"/>
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

### Data Mapping Field Definition Lookup definition

Title	Description
Namespace	Required. Select the namespace (large functional category) associated with the field you wish to search for.
Component	Required. Enter or search for and return the component (more specific functional category, such as a given screen or document section) associated with the field you wish to search for.
Field	Optional. Enter the field name of the field you wish to search for or use the lookup to search for it.
Description	Optional. Search for a field by its description. Remember that wildcards can be used, such as *account* to return all fields with the word 'account' in their description.
Database Table Name	Optional. Enter the name of the table in which the field you're searching for resides.
Database Field Name	Optional. Enter the name that identifies the field in the database.

**Data Mapping Field Definition Lookup** \* required field

<b>* Namespace:</b>	OLE-COA - Chart of Accounts
<b>* Component:</b>	Account
<b>Field:</b>	Account Number
<b>Description:</b>	<input type="text"/>
<b>Database Table Name:</b>	<input type="text"/>
<b>Database Field Name:</b>	<input type="text"/>
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

One item retrieved.

Namespace	Component	Field	Description	Database Table Name	Database Field Name
OLE-COA	Account	<a href="#">Account Number</a>	Identifier for a pool of funds assigned to a specific university entit...	CA_ACCOUNT_T	ACCOUNT_NBR

The results display the namespace, component, field name, description and database field name and table name. Click on the linked field name to view the inquiry which contains additional data fields.

Data Mapping Field Definition Inquiry		expand all collapse all	
▼ hide			
<b>Namespace:</b>	OLE-COA - Chart of Accounts	<b>Component:</b>	Account
<b>Field:</b>	Account Number	<b>Description:</b>	Identifier for a pool of funds assigned to a specific university entity for a specific function.
<b>Database Table Name:</b>	CA_ACCOUNT_T	<b>Database Field Name:</b>	ACCOUNT_NBR
<b>Database Data Type:</b>	VARCHAR2	<b>Application Data Type:</b>	String
<b>Database Defined Length:</b>	7	<b>Application Defined Length:</b>	7
<b>Decimal Places:</b>	0	<b>Reference Component:</b>	
<b>Required:</b>	Yes	<b>Validation Pattern:</b>	AlphaNumericValidationPattern (^[A-Za-z0-9]{7}\$)
<b>Encrypted:</b>	No	<b>Mask Pattern:</b>	Unknown MaskFormatter

close


## Data Mapping Field Definition Inquiry

Fields appearing on the inquiry and not previously described above are detailed here.

### Data Mapping Field Definition Inquiry definition

Title	Description
Database Data Type	The type of data expected for this field by the database.
Application Data Type	The type of data the application expects in this field.
Database Defined Length	The maximum character length of the field in the database.
Application Defined Length	The maximum character length of the field in the application.
Decimal Places	The number of decimal places supported by this field.
Reference Component	OLE component where this field originates. For example, an account number field has a reference component of 'account' indicating it is defined on the Account document.
Required	Indicates if the field must be completed for this particular component.
Validation Pattern	The technical pattern used to determine if the data in the field is valid.
Encrypted	Indicates if the field is encrypted at the database level.
Mask Pattern	If a field is masked (its content partially or fully obscured to unauthorized users) this field defines the type of masking used.

## External Data Sources (z39.50 connection)

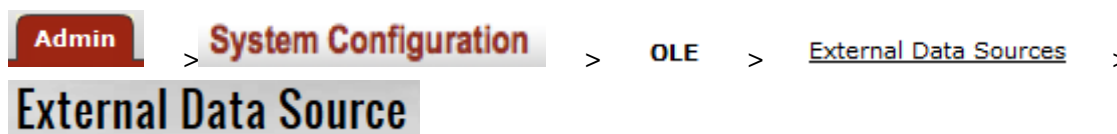

As the **Import Bib from External Data Source** option is available to show the possibility for institutions to import bibliographic records through a Z39.50 protocol, this interface exists to support the functionality. This e-doc can be used to create and maintain the sources for the import.

### Note

Users will need to implement the Z39.50 protocol before using this e-doc.

## Document Layout


## System Configuration Administrative Documents

<b>External Data Source</b>	Document Number: 4358	Document Status: INITIATED
	Initiator Network Id: admin	Creation Timestamp: 03:49 PM 08/16/2013
<input type="button" value="expand all"/> <input type="button" value="collapse all"/>		
<small>* indicates required field</small>		
<b>▼ Document Overview</b>		
* Description: <input style="width: 90%;" type="text"/>	Explanation: <input style="width: 100%;" type="text"/>	
Organization Document Number: <input style="width: 60%;" type="text"/>		
<b>▼ Add/Edit Data Source</b>		
Name: <input style="width: 90%;" type="text"/>		
Description: <input style="width: 90%;" type="text"/>		
Domain Name: <input style="width: 90%;" type="text"/>		
Port Number: <input style="width: 90%;" type="text"/>		
LogIn Id: <input style="width: 90%;" type="text"/>		
Authorization Key: <input style="width: 90%;" type="text"/>		
Password: <input style="width: 90%;" type="text"/>		
<b>▶ Notes and Attachments (0)</b>		
<b>▶ Ad Hoc Recipients</b>		
<b>▶ Route Log</b>		
<input type="button" value="submit"/> <input type="button" value="save"/> <input type="button" value="blanket approve"/> <input type="button" value="close"/> <input type="button" value="Cancel"/>		

### Add/Edit Data Source tab definition

Title	Description
Name	The familiar title of the data source.
Description	The description of the data source.
Domain Name	Enter the web address of the data source.
Port Number	Enter the port number required for accessing the data source.
Login ID	Enter the login ID of the data source.
Authorization Key	Enter the authorization key of the data source.
Password	Enter the password for the data source.

## Functional Field Description

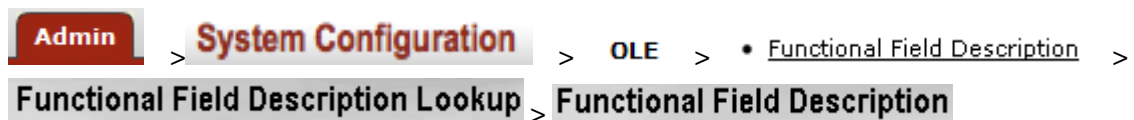

The Functional Field Description document is used to maintain descriptions for various fields throughout the application. Note that these values are for data mapping purposes only and cannot actually be viewed elsewhere in the application.

This document can only be initiated by members of OLE-SYS Manager role and does not route for approval. You can only edit existing field descriptions (by choosing 'edit' from the lookup). Creating new values requires technical assistance.



## Document Layout

The Functional Field Description document contains the **Functional Field Description** tab.

Functional Field Description tab definition

Title	Description
Namespace	Display only. The namespace (large functional category) associated with the field you wish to edit the description for.
Component	Display only. The component (more specific functional category, such as a given screen or document section) associated with the field you wish to edit the description for.
Field	Display only. The field name of the field you wish to edit the description for.
Description	Required. Enter the description you wish to associate with this field.
Active Indicator	Required. Leave checked if you wish this functional description to be active. Uncheck the box if you wish to inactivate the description. Since these are not viewable elsewhere in the application inactivation will have no apparent effect.


## Message Of The Day



The Message of the Day document updates a message that appears OLE portal. It is an easy way to share information with OLE users and can be updated at any time.

### Note

Only members of OLE-SYS Manager role can create or edit Message of the Day documents.

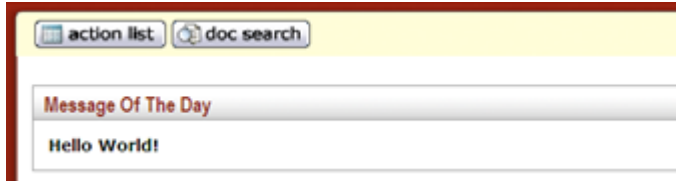

## Document Layout

The screenshot displays the 'Message Of The Day' document layout. At the top, there is a header with 'Message Of The Day' and a help icon. To the right, there are fields for 'Doc Nbr: 3283', 'Status: INITIATED', 'Initiator: amdeload', and 'Created: 04:28 PM 09/12/2009'. Below this is a 'Document Overview' tab with a 'hide' button. The 'Document Overview' section contains fields for '\* Description:', 'Org. Doc. #:', and 'Explanation:'. Below that is an 'Edit Message Of The Day' tab with a 'hide' button. The 'Edit Message Of The Day' section contains a 'New' section with a '\* Financial System Origination Code:' field and a 'Message Of The Day:' text area. At the bottom, there are three tabs: 'Notes and Attachments (0)', 'Ad Hoc Recipients', and 'Route Log', each with a 'show' button. At the very bottom, there are buttons for 'submit', 'save', 'blanket approve', 'close', and 'cancel'.

## Edit Message Of The Day Tab

The Message of the Day document contains the **Edit Message of the Day** tab.

### Edit Message of the Day tab definition

Title	Description
Financial System Origination Code	Required. Enter the code that identifies the instance of OLE in which you want the message to appear.
Message of the Day	Optional. Enter the text you want OLE users to see as the message of the day.

## System Options



The System Options document defines many high-level definitions of a fiscal year, including balance types, object types and the university chart level. It also contains values that have an impact on how sufficient funds checking works for a given fiscal year.

### Note

Only members of OLE-SYS Manager role can create or edit System Options documents. These documents do not route for approval.

## Tip

When you are configuring object types, it is important to cross reference the Object Type Table, System Options Table and the OBJECT\_TYPES parameters in the Parameter Table.

## Document Layout

The screenshot displays the 'System Options' document interface. At the top, a header bar shows 'System Options' with a help icon, and metadata including 'Doc Nbr: 3293', 'Status: INITIATED', 'Initiator: amdeload', and 'Created: 04:56 PM 09/12/2009'. Below this are two tabs: 'Document Overview' and 'Edit System Options'. The 'Document Overview' tab contains fields for '\* Description:' and 'Org. Doc. #:' on the left, and 'Explanation:' on the right. The 'Edit System Options' tab is active and shows a 'New' section with a list of configuration items, each with a label, a value field, and a required field indicator (a small 'S' in a circle). The items include: Fiscal Year, Fiscal Year Name, Fiscal Year Start Year, Fiscal Year Start Month, Beginning Balances Loaded Indicator, Budget Checking Options Code, Chart Code, Actual Balance Type, Budget Checking Balance Type, External Encumbrance Balance Type, Internal Encumbrance Balance Type, Pre-Encumbrance Balance Type, Eliminations Balance Type, Expenditure/Expense Object Type, Expenditure Not Expense Object Type, Expense Not Expenditure Object Type, Income/Cash Object Type, Income Not Cash Object Type, Cash Not Income Object Type, Assets Object Type, Liabilities Object Type, Fund Balance Object Type, Cost Share Encumbrance Balance Type, Base Budget Balance Type, Monthly Budget Balance Type, Transfer In Object Type, Transfer Out Object Type, and Nominal Closing Balances Balance Type. At the bottom of the form are sections for 'Notes and Attachments (0)', 'Ad Hoc Recipients', and 'Route Log', each with a 'show' button. A final row of buttons includes 'submit', 'save', 'blanket approve', 'close', and 'cancel'.




















## Edit System Options Tab




The System Options document includes the **Edit System Options** tab.

### Edit System Options tab definition

Title	Description
Fiscal Year	Required. Enter the fiscal year for which values are being defined.
Fiscal Year Name	Required. Enter the descriptive name of the fiscal year.
Fiscal Year Start Year	Required. Enter the calendar year when the fiscal year begins.
Fiscal Year Start Month	Required. Enter the calendar month when the fiscal year begins
Fiscal Year	Required. Enter the fiscal year for which values are being defined.
Beginning Balances Loaded Indicator	Optional. Select the check box if the beginning balances for the fiscal year have been loaded. If beginning balances have not been loaded then cash level sufficient funds checking must check both the previous and current

## System Configuration Administrative Documents

	fiscal years. Clear the check box if the beginning balances for the fiscal year have not been loaded.
Budget Checking Options Code	Required. Select the check box if sufficient funds checking is enabled for the fiscal year. Clear the check box if it is not.
Chart Code	Required. Enter the university level chart code defined for the fiscal year, or search for it from the <b>Chart</b> lookup  .
Actual Balance Type	Required. Enter the balance type used to identify an Actual in the fiscal year, or search for it from the <b>Balance Type</b> lookup  .
Budget Checking Balance Type	Required. Enter the balance type used to identify Budget Checking in the fiscal year, or search for it from the <b>Balance Type</b> lookup  .
External Encumbrance Balance Type	Required. Enter the balance type used to identify External Encumbrances in the fiscal year, or search for it from the <b>Balance Type</b> lookup  .
Internal Encumbrance Balance Type	Required. Enter the balance type used to identify Internal Encumbrances in the fiscal year, or search for it from the <b>Balance Type</b> lookup  .
Pre-Encumbrance Balance Type	Required. Enter the balance type used to identify Pre-Encumbrances in the fiscal year, or search for it from the <b>Balance Type</b> lookup  .
Eliminations Balance Type	Required. Enter the balance type used to identify Eliminations in the fiscal year, or search for it from the <b>Balance Type</b> lookup  .
Expenditure/Expense Object Type	Required. Enter the object type used to identify the Expenditure/Expense category in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Expenditure Not Expense Object Type	Required. Enter the object Type used to identify the Expenditure Not Expense category in this fiscal year, or search for it from the <b>Object Type</b> lookup  .
Expense Not Expenditure Object Type	Required. Enter the object Type used to identify the Expense Not Expenditure category in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Income/Cash Object Type	Required. Enter the object Type used to identify the Income/Cash category in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Income Not Cash Object Type	Required. Enter the object type used to identify the Income Not Cash category in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Cash Not Income Object Type	Required. Enter the object type used to identify the Cash Not Income category in the fiscal year or search for it from the <b>Object Type</b> lookup  .
Assets Object Type	Required. Enter the object type used to identify the Asset category in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Liabilities Object Type	Required. Enter the object type used to identify the Liabilities category in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Fund Balance Object Type	Required. Enter the object type used to identify the Fund Balance category in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Cost Share Encumbrance Balance Object Type	Required. Enter the object type used to identify cost share encumbrances in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Base Budget Balance Type	Required. Enter the object type used to identify Base Budget in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Monthly Budget Balance Type	Required. Enter the object type used to Monthly Budget in the fiscal year, or search for it from the <b>Object Type</b> lookup  .

Transfer In Object Type	Required. Enter the object type used to identify Transfer In transactions in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Transfer Out Object Type	Required. Enter the object type used to identify Transfer Out transactions in the fiscal year, or search for it from the <b>Object Type</b> lookup  .
Nominal Closing Balances Balance Type	Required. Enter the object type used to identify Nominal Balance closing entries in the fiscal year, or search for it from the <b>Object Type</b> lookup  .

## Search Framework Configuration

**Admin** > **System Configuration** > **OLE** > **Search Framework Configuration** >

# Search Framework Configuration

The **Search Framework Configuration** controls what is displayed on the Search Workbench and to a large degree how the Search Workbench operates.

### Note

To see the system defaults for 1.5, see the Jira [OLE-6360](#).

# Document Layout

## Search Framework Configuration

### Doc Types

* Name (Unique)	* Label	Description	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>
bibliographic	Bibliographic	<input type="text"/>	
license	License	<input type="text"/>	
holdings	Holdings	<input type="text"/>	
item	Item	<input type="text"/>	
eHoldings	EHoldings	<input type="text"/>	

### Doc Formats

Document Type:

* Name (Unique)	* Label	Description	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

### Doc Fields

Document Type:  Document Format:

* Name	* Label	Description	Is Search	Is Display	Global Edit	Is Export	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="add"/>

### Search Result Page Size

Size	Actions
<input type="text"/>	<input type="button" value="add"/>
10	
25	
50	
75	
100	

### Facet Page Sizes

Facet Page Size Short:

Facet Page Size Long:

The Search Framework Configuration screen is divided into 5 parts with each part controlling a different aspect of the Search Workbench: **Doc Types**, **Doc Formats**, **Doc Fields**, **Search Result Page Size**, and **Facet Page Size**.

## Doc Types Tab

## ▼ Doc Types

* Name (Unique)	* Label	Description
bibliographic	Bibliographic	
license	License	
holdings	Holdings	
item	Item	
eHoldings	EHoldings	

Save

Reset

The Doc Types tab has 3 columns and as many rows as are needed to define the various doc types of records stored in DocStore. These Doc Types are what are displayed on the Search Workbench in the Document Type drop down:

## Search Workbench ?

Document Type:  ▼

Select Records By:  ▼

The following special characters, \, ^, are ignored in search text.

Search For:  All of these ▼ In Field:  Add

AND  OR  NOT

Search Clear New Search

They are also used in the other sections of the Search Framework Configuration as described below.

Multiple doc types can be added to the search framework configuration by filling in all of the required fields and clicking the **add** button.

## Warning

DO NOT ADD OR CHANGE ANY VALUES IN THIS SECTION WITHOUT FIRST CONSULTING WITH A PROGRAMMER. Code changes are needed to support a new document type.

### Doc Types Column definitions

Title	Description
Name	Required. A unique name of the Doc Type. This will appear within the code.
Label	Required. A label for the Doc Type. This will appear in the Doc Type lookup on the Search Workbench.
Description	Optional. A description for the Doc Type.

## Doc Formats Tab

### ▼ Doc Formats

Document Type:

* Name (Unique)	* Label	Description	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

The Doc Formats tab allows you to define multiple formats for document types and to provide each with a distinct label. The values in the drop down “Document Type” are from the [Doc Types](#) definitions described above.

To work with the Doc Formats section, first select a **Document Type** in that drop down.

## Search Framework Configuration

### ▶ Doc Types

### ▼ Doc Formats

Document Type:

* Name (Unique)	* Label	Description	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>



Selecting **Document Type** Bibliographic will display the 3 formats defined for 3 different Bibliographic formats: Dublin Core, Dublin Unqualified, and MARC.

Selecting **Document Types** E Holding, Holding and Item will display a single document format definition for each. For all of these document types, the format is oleml (OLE Markup Language – an xml format).

Selecting **Document Type** License displays 4 different formats for License. The definitions are DOC (Word Doc), ONIXPL (ONIX for Publications Licenses), PDF (Adobe), and XSLT (Extensible Stylesheet Language Transformations).

### ▼ Doc Formats

Document Type:

* Name (Unique)	* Label	Description	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>
dublin	Dublin Core	<input type="text"/>	
dublinunq	Dublin Unqualified	<input type="text"/>	
marc	MARC	<input type="text"/>	

The format definitions along with the [Doc Types](#) are used in the [Doc Fields](#) section described below.

Multiple doc formats can be added to the search framework configuration by filling in all of the required fields and clicking the **add** button.

### Warning

DO NOT ADD OR CHANGE ANY VALUES IN THIS SECTION WITHOUT FIRST CONSULTING WITH A PROGRAMMER. Code changes are needed to support a new document type.

#### Doc Format Column definitions

Title	Description
Name	Required. A unique name of the Doc Format. This will appear within the code.
Label	Required. A label for the Doc Format.
Description	Optional. A description for the Doc Format.

## Doc Fields Tab

### ▼ Doc Fields

Document Type:  Document Format:

* Name	* Label	Description	Is Search	Is Display	Global Edit	Is Export	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="add"/>

The Doc Fields tab controls the fields that are available for searching, the fields that are displayed in the results, the fields that can be globally edited in the Global Edit screen, and the fields that will be exported in an XML format from the search results. It also controls the definitions of those fields in terms of the values recorded in the bibliographic records. For example a field called Title can be defined in terms of MARC fields.

## Note

Changes to some Doc Fields values will only affect records added or edited after the change is made because an indexing update is necessary to alter the display.

In order to index and reindex bibliographic, holdings, e-holdings, and item records in Solr, go to <http://demo.docstore.ole.kuali.org/admin.jsp> (or <http://tst.docstore.ole.kuali.org/admin.jsp> if you are in the tst environment).

Click the **Start** button.

Click **Show Status** button to see the status.

Indexing is complete when you see the "Index End Time"

To use this section, you need to select values from both the drop downs: Document Type and Document Format. The values for these lists are from the previous sections [Doc Types](#) and [Doc Formats](#). Selecting a Doc Type will change the values in the Document Format section.

## Search Framework Configuration

▶ Doc Types

▶ Doc Formats

▼ Doc Fields

Document Type:  Document Format:

* Name	* Label	Description	Exc
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>

Depending on the Document Type selected from the drop down, different columns will be displayed.

### Doc Fields for Document Type – Bibliographic and Document Format – MARC

Selecting **Document Type** Bibliographic and **Document Format** MARC displays columns:

## System Configuration Administrative Documents

Name, Label, Description, Path Include, Path Exclude, Is Search, Is Display, Global Edit, Is Export, and Is Facet.

A Note on Titles: What OLE displays as Title in the search results is Title\_sort. If you modify Title\_display you will not see the results. However if you mouse-hover over a Title\_sort value in the Search Workbench, you will see the Title\_display value.

Multiple doc fields can be added to the search framework configuration by filling in all of the required fields and clicking the **add** button.

### ▼ Doc Fields

Document Type:  Document Format:

Name	Label	Description	Path Include	Path Exclude	Is Search	Is Display	Global Edit	Is Export	Is Facet	Actions
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="add"/>
Author_display	Author		100-a,110-a <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
Author_facet	Author		100,110,111,700,710,7 <input checked="" type="checkbox"/>	100-6,100=,100-?,111 <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
Author_search	Author		100,110,111,700,710,7 <input checked="" type="checkbox"/>	100-6,100=,100-?,111 <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
Author_sort	Author		100-a,110-a <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
Barcode_display	Barcode		999-i <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

### Doc Fields definitions

Title	Description
Name	<p>Required. This is the name of the field used in Solr configuration. Please note that each Name value here must have the same name in the Solr configuration.</p> <p style="text-align: center;"><b>Warning</b></p> <p>Adding a name here must be accompanied by a reconfiguration of Solr to be effective. Changing an existing Name value here without a corresponding name change in Solr will have unforeseen consequences .</p>
Label	<p>Required. This is what the users will see displayed as search values in the 'In Field' drop down on the Search Workbench for selecting the search criteria for Names ending in "_search" and the column names for search results for Names ending in "_display". This can be changed without any corresponding change in Solr Configuration.</p> <p style="text-align: center;"><b>Note</b></p> <p>As of this writing, changing the value for an existing Label does not affect what the users see.</p>
Description	Optional. This is just for documentation. It does not have any impact on what the user sees on the Search Workbench.
Path Include	<p>Optional. For Bibliographic Marc format fields, this is a reference to the underlying MARC fields and subfield codes. Entering a MARC field and subfield here defines what fields are displayed or searched on when this field is displayed in the search results or searched if selected in the search criteria. The default values displayed were derived from the <a href="#">OLE Search Technical Documentation page</a> (section 1.3) on OLE's Wiki page.</p> <p>There is a specific syntax to be used for both Path Include and Path Exclude. See <a href="#">Path Syntax</a> below.</p>
Path Exclude	<p>Optional. For Bibliographic MARC format fields, this is a limitation on the Path Include values. If the path include for Title_display field for example was "245", a value of "245-c" in this column would cause all values in 245 subfields to display except for the value in subfield 245 c.</p> <p>See <a href="#">Path Syntax</a> below for a definition of the syntax to be used.</p>

## System Configuration Administrative Documents

---

Is Search	Optional. Checking this box for a field will cause the field label to appear as a value in the “In Field” drop down on the Search Workbench. Removing the check will cause that field to disappear from those drop down values. Only check fields in this column which have “_search” as the last part of their names.  See <a href="#">Cautionary Notes</a> below.
Is Display	Optional. Checking this box for a field will cause the field label to appear as a column in the search results on the Search Workbench. Removing the check will cause that field column to disappear from the search results display on the Search Workbench. Only check fields in this column which have “_display” as the last part of their names.  See <a href="#">Cautionary Notes</a> below.
Global Edit	Optional. Checking this box for a field will allow the field to be edited in the Global Edit screens. A Global Edit screen for Bibliographic records is a future enhancement. This column will likely be hidden until that enhancement is ready.
Is Export	Optional. This is for a future feature that will allow export of fields in csv format. It has no impact on the “Export to Doc XML” function displayed under the search results on the Search WorkBench screen.
Is Facet	Optional. Checking this box will cause the Label for this field to appear in the “Narrow Search” section of the Search Workbench screen when searching for Bibliographic records. Only check fields in this column that have “_facet” as part of their names. See <a href="#">Cautionary Notes</a> below.
Actions	Click <b>add</b> before clicking <b>save</b> to add extra rows to the <b>Doc Fields</b> tab.

### Path Syntax

There is a specific Path syntax to be used in the Path Include and Path Exclude column values for a field. Here are examples of the syntax.

245-a means MARC field 245, subfield a. This is the value that will be searched or displayed for that field name.

245-a;b means MARC field 245 subfield a and subfield b. The semi colon means that for display fields, the value displayed will be the concatenated values of those subfields.

234-c, 245-6 means MARC field 245 subfield c and field 245 subfield 6 will be displayed, the comma will cause those two values to display on two lines in the search results.

600,610,69\* means all the subfields of 600 will be concatenated and displayed on the first line, all the subfields of 610 will be concatenated and displayed on the second line, all the values of all the subfields of all fields starting with 69 will be concatenated and displayed on a third line.

Note: There are some nonstandard subfields in a few of the default values that should not be confused as some kind of syntax. Examples include the Author\_display Path Exclude field. The values “100-=” and “100-?” are actually subfields for the 100 field used by some of OLE’s partner institutions’ current systems – not syntax. It is likely that those subfields will not be used in OLE and will be removed from these default field definition values.

### Doc Fields for Document Type Holdings, EHoldings, and Items; Document Format OLEML

Selecting **Document Type** Holding, EHoldings, or Items and **Document Format** OLEML displays columns:

Name, Label, Description, Is Search, Is Display, Global Edit, Is Export, and Is Facet.

Multiple doc fields can be added to the search framework configuration by filling in all of the required fields and clicking the **add** button.

## System Configuration Administrative Documents

### ▼ Doc Fields

Document Type:  Document Format:

* Name	* Label	Description	Is Search	Is Display	Global Edit	Is Export	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="button" value="add"/>
AccessLocation_displ	Access Information	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
Authentication_display	Access Information	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
CallNumber_display	Call Number	<input type="text"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
CallNumber_search	Call Number	<input type="text"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
CallNumberPrefix_dis	Call Number Prefix	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
CallNumberPrefix_sea	Call Number Prefix	<input type="text"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	

### Doc Fields definitions

Title	Description
Name	<p>Required. This is the name of the field used in Solr configuration. Please note that each Name value here must have the same name in the Solr configuration.</p> <p style="text-align: center;"><b>Warning</b></p> <p>Adding a name here must be accompanied by a reconfiguration of Solr to be effective. Changing an existing Name value here without a corresponding name change in Solr will have unforeseen consequences .</p>
Label	<p>Required. This is what the users will see displayed as search values in the 'In Field' drop down on the Search Workbench for selecting the search criteria for Names ending in "_search" and the column names for search results for Names ending in "_display". This can be changed without any corresponding change in Solr Configuration.</p> <p style="text-align: center;"><b>Note</b></p> <p>As of this writing, changing the value for an existing Label does not affect what the users see.</p>
Description	Optional. This is just for documentation. It does not have any impact on what the user sees on the Search Workbench.
Is Search	<p>Optional. Checking this box for a field will cause the field label to appear as a value in the "In Field" drop down on the Search Workbench. Removing the check will cause that field to disappear from those drop down values. Only check fields in this column which have "_search" as the last part of their names.</p> <p>See <a href="#">Cautionary Notes</a> below.</p>
Is Display	<p>Optional. Checking this box for a field will cause the field label to appear as a column in the search results on the Search Workbench. Removing the check will cause that field column to disappear from the search results display on the Search Workbench. Only check fields in this column which have "_display" as the last part of their names.</p> <p>See <a href="#">Cautionary Notes</a> below.</p>
Global Edit	Optional. Checking this box for a field will allow the field to be edited in the Global Edit screens. A Global Edit screen for Bibliographic records is a future enhancement. This column will likely be hidden until that enhancement is ready.
Is Export	Optional. This is for a future feature that will allow export of fields in csv format. It has no impact on the "Export to Doc XML" function displayed under the search results on the Search Workbench screen.
Is Facet	Optional. Checking this box will cause the Label for this field to appear in the "Narrow Search" section of the Search Workbench screen when searching for Bibliographic records. Only check fields in this column that have "_facet" as part of their names. See <a href="#">Cautionary Notes</a> below.
Actions	Click <b>add</b> before clicking <b>save</b> to add extra rows to the <b>Doc Fields</b> tab.

### Notes about some of the Field Name rows defined for Holdings, Items and Eholdings:

- Title\_display is needed.
- Some current fields like Title\_Facet, Title\_search, Title\_sort are not meaningful here and will be removed.
- Fields like “CallNumber\_display” and “CallNumber\_search” can be merged into a single field. We anticipate that this will be done soon.

### Cautionary Notes

- The question has come up about the significance of the “\_display”, “\_search”, “\_facet”, “\_sort” that are included in the Name column. If all of those different names for the same type of field are defined exactly the same in the Path Include and Path Exclude fields, can one of those fields have the Is Search, Is Display, Global Edit, and Is Facet boxes checked and the other fields ignored. This is something that still needs to be tested. Until then, only check the boxes as described above.
- The field Names ending in “\_sort” are for internal use and exist primarily for the possible suppression of initial characters in the subfield value. We are not yet sure if there is a use case for having different values in the Path Include and Path Exclude fields for this Name than are present for the same field with “\_display” at the end. At present the Path Include and Exclude values for Names ending with “\_sort” are the same as those ending with “\_display”.
- If a change is made in the Path Include or Path Exclude for any of the existing Names, the change will only be effective for bibliographic records created after the change. A re-index of the bibliographic records will be required to make that change effective for records that existed before the change. Even if the Name is a “\_display” field, it will require a re-index to be effective for existing documents.

### Note

In order to index and reindex bibliographic, holdings, e-holdings, and item records in Solr, go to <http://demo.docstore.ole.kuali.org/admin.jsp> (or <http://tst.docstore.ole.kuali.org/admin.jsp> if you are in the tst environment).

Click the **Start** button.

Click **Show Status** button to see the status.

Indexing is complete when you see the "Index End Time"

Note: There are some nonstandard subfields in a few of the default values that should not be confused as some kind of syntax. Examples include the Author\_display Path Exclude field. The values “100-=” and “100-?” are actually subfields for the 100 field used by some of OLE’s partner institutions’ current systems – not syntax. It is likely that those subfields will not be used in OLE and will be removed from these default field definition values.

### Doc Fields for Document Type Licenses

The doc field definitions for Document Type License has not been verified as yet.

### Search Results Page Size Tab

Multiple Search Result Page Sizes can be added to the search framework configuration by filling in all of the required fields and clicking the **add** button.

## ▼ Search Result Page Size

Size	Actions
<input type="text"/>	<input type="button" value="add"/>
<input type="text" value="10"/>	
<input type="text" value="25"/>	
<input type="text" value="50"/>	
<input type="text" value="75"/>	
<input type="text" value="100"/>	

### Search Result Page Size Column definitions

Title	Description
Size	Required. The number of search results displayed options available with each search's Result's <b>Show __ Entries</b> .

## Facet Page Size Tab

Multiple Facet Page Sizes can be added to the search framework configuration by filling in all of the required fields and clicking the **add** button.

## ▼ Facet Page Sizes

**Facet Page Size Short:**

**Facet Page Size Long:**

## Process Overview

Modify tabs within the Search Framework Configuration page. Consult a programmer before adding or modifying some of the sections, these are noted above.

Click  to save any changes or additions you have made. You must save each section that you modify.

Click  to discard any changes you have made since the section was last saved. The reset function only restores everything from the database, by clicking the button any changes made in the session without clicking save will be reverted.

## Example

An example of how indexing and searching is done:

When a Bib MARC record is added or updated, the following fields are generated for this record and indexed in Solr:

**Title\_search** - This is a multi-valued field and the values are generated by taking all the subfields of the datafields 245,130,240,246,247,440,490,730,740,773,774,780,785,830,840 (Path Include values) and excluding the subfields

245-c,245-6,245-c,245-6,130-c,130-6,240-c,240-6,246-c,246-6,247-c,247-6,440-c,440-6,490-c,490-6,730-c,730-6,740-c,740-6,773-c,773-6,774-c,774-6,780-c,780-6,785-c,785-6,830-c,830-6,840-c,840-6 (Path Exclude values)

So there can be 15 values of Title\_search generated, assuming all of the above data fields have values.

**Title\_display** - 245-a;b - This is a single-valued field and its value is generated by concatenating subfields a and b of datafield 245

When a search request (**Title** = 'ole') is submitted, the query is built and sent to solr. The value 'ole' is looked for in the 15 or so values of **Title\_search** field of every bib record **in Solr**. If found, the single value of **Title\_display** of the matched record is returned **from Solr** as a search result row.



(So, the value searched for may not appear in the displayed search result row.)


Both **\_search** and **\_display** fields are updated in Solr whenever a MARC record is added or updated in OLE. And the **Path Include** and **Path Exclude** definitions that are available at that time will be used for updating Solr.

So if the **Path Include** and **Path Exclude** are modified for either the **\_search** or **\_display** field, these modifications will not affect the records already indexed in Solr, until they are reindexed.

**Is\_search** property of **Title\_search** field tells whether the user can run a search against this field.

**Is\_display** property of **Title\_display** field tells whether the user can see this column in search result grid.

## Namespace



The Namespace document allows you to add new or maintain existing namespace codes. Namespace codes are used to identify various pieces of functionality and generally correspond to large functional areas. The namespaces in OLE base data normally take the form of a Kuali application followed by one of that application's modules. For example OLE Purchasing /Accounts Payable module would be associated with the namespace OLE-PURAP.

This document can only be initiated by members of OLE-SYS Manager or KR-SYS Technical Administrator role and does not route for approval.

## Document Layout

The screenshot shows the 'Namespace' document layout. At the top, there is a metadata table:

Doc Nbr:	3361	Status:	INITIATED
Initiator:	ole-khuntlev	Created:	02:03 PM 06/20/2013

Below the metadata table are buttons for 'expand all' and 'collapse all', and a note '\* required field'. The main content area is divided into several sections:

- Document Overview**: Contains fields for '\* Description:', 'Organization Document Number:', and 'Explanation:'.
- Edit Namespace**: Contains a 'New' section with fields for '\* Namespace Code:', '\* Namespace Name:', 'Application ID:', and 'Active Indicator:' (checked).
- Notes and Attachments (0)**: A section with a 'show' button.
- Ad Hoc Recipients**: A section with a 'show' button.
- Route Log**: A section with a 'show' button.

At the bottom of the form are buttons for 'submit', 'save', 'close', and 'cancel'.


## Edit Namespace Tab

The Namespace document contains the **Edit Namespace** tab.

### Edit Namespace tab definition

Title	Description
Namespace Code	Required. Enter the namespace code for this namespace. OLE convention for most namespaces is application abbreviation and module abbreviation separated by a dash (OLE-PURAP, KR-WKFLW, etc.)
Namespace Name	Required. A longer text description for this namespace code.
Application ID	Optional. An additional namespace identifier which identifies which application should recognize this namespace code. This is generally only used in instances where the regular namespace code is not enough to make a definition unique. This definition is normally used directly on the Parameter document and not assigned specifically to a namespace on this table.
Active Indicator	Required. Leave checked to indicate that this namespace is active and can be associated with permissions, responsibilities, roles and KualI data elements organized by namespace. Uncheck the box to inactivate this namespace and make it an invalid choice.

## Parameter



The Parameter document is used to define parameters and business rules in OLE. A specific value of a parameter can vary based on what the parameter is used to define. Some parameters create business rules. These rules create restrictions and enforce valid values and combinations on various document types or batch processes. Other parameters simply define institution-specific values not defined elsewhere in OLE. The value may, for example, be text that OLE is to display in a given location or it may be a simple yes or no value to turn an option on or off.

Only members of the KR-SYS Technical Administrator or OLE-SYS Manager role can create or edit Parameter documents.

## Document Layout

Parameter Maintenance Document ?

<b>Doc Nbr:</b> 3363	<b>Status:</b> INITIATED
<b>Initiator:</b> ole-khuntley	<b>Created:</b> 02:12 PM 06/20/2013

expand all collapse all  
\* required field

Document Overview ▼ hide

**\* Description:**

**Organization Document Number:**

**Explanation:**

Edit Parameter ▼ hide

**New**

**\* Namespace Code:**

**\* Component:**

**\* Application ID:**

**\* Parameter Name:**

**Parameter Value:**

**\* Parameter Description:**

**\* Parameter Type Code:**

**\* Parameter Constraint Code:**  Allowed  Denied

**Notes and Attachments (0)** ▶ show

**Ad Hoc Recipients** ▶ show

**Route Log** ▶ show

submit
save
close
cancel

## Edit Parameter Tab


The Parameter document includes the **Edit Parameter** tab. This tab is where you define the modules, type, rules, and description of the parameters.

### Edit Parameter tab definition

Title	Description
Namespace Code	Required. Select the appropriate Namespace code for the parameter from the <b>Namespace Code</b> list or search for it from the lookup.
Component	Required. Enter the parameter component code or search for it from the <b>Parameter Component</b> lookup .
Application ID	Required. Enter the application namespace to identify the application to which this parameter applies. Note that the same parameter can have different values for different applications.
Parameter Name	Required. Enter the name of the parameter being defined.
Parameter Value	Required. Enter the value for the parameter. The nature of a given parameter determines what form the parameter value should take. In some cases it is text for an OLE user to view or it could be a value such as an account number or an object code. In cases where multiple values are allowed they should be separated by a semi-colon. Consult with technical resources if you are unsure what format a specific parameter value should take.
Parameter Description	Required. Describe the purpose and usage of the parameter. The description is used for a documentation purpose.
Parameter Type Code	Required. Select the parameter type code from the <b>Parameter Type</b> list or search for it from the lookup .
	Default types include:

	System Configuration: Used to establish institution values not specific to validation.
	Document Validation: Used to establish business rules for documents.
Parameter Constraint Code	Required. Select Allowed if the parameter is to allow the defined parameter value within OLE application. Select <b>Denied</b> if the parameter is to deny the defined parameter value within OLE application. Consult with technical resources if you are unsure of the appropriate constraint code for a given parameter.

## Parameter Component



The Parameter Component document defines valid components that can be associated with a parameter. Parameter components indicate a general or specific piece of OLE functionality to which a parameter applies. Some Parameter Components are generic (batch, lookup, all) while others are very specific and refer to particular documents or even specific tabs or fields on documents.

Only members of the KR-SYS Technical Administrator or OLE-SYS Manager role can create or edit Parameter Component documents.

## Document Layout

<b>Component Maintenance Document</b> ?	<b>Doc Nbr:</b> 3365	<b>Status:</b> INITIATED
	<b>Initiator:</b> ole-khuntlev	<b>Created:</b> 02:19 PM 06/20/2013

[expand all](#) | [collapse all](#)  
\* required field

Document Overview ▼ hide

**Document Overview**

\* **Description:**

**Organization Document Number:**

**Explanation:**

---

**Edit Component** ▼ hide

**New**

\* **Namespace Name:**

\* **Component:**

\* **Component Name:**

**Active Indicator:**

**Notes and Attachments (0)** ▶ show

**Ad Hoc Recipients** ▶ show


**Route Log** ▶ show

[submit](#) [save](#) [close](#) [cancel](#)

## Edit Component Tab


The Parameter Component document includes the **Edit Component Type** tab.

### Edit Component tab definition

Title	Description
Namespace Name	Required. Select the appropriate Namespace code for the parameter from the Namespace Name list or search for it from the lookup.
Component	Required. Enter the parameter component code or search for it from the Parameter Component lookup  .

Component Name	Required. Enter the descriptive name of the parameter component being defined.
Active Indicator	Required. Leave checked to indicate that this parameter component is active and can be associated with parameters. Uncheck the box to inactivate this component and make it an invalid choice.

## Parameter Type



The parameter type broadly defines what a parameter is used for. Parameters used for document validation (such as business rules) and parameters used for System Configuration (customizing OLE for your institution) are two types of parameters used in OLE.

The Parameter Type document allows you to create new or edit existing parameter types. Code must be developed to support any additional types or changes to existing types.

Only members of the KR-SYS Technical Administrator or OLE-SYS Manager role can create or edit Parameter Type documents and they do not route for approval.

## Document Layout

## Edit Parameter Type Tab


The Parameter Type document includes the **Edit Parameter Type** tab.

### Edit Parameter Type tab definition

Title	Description
Parameter Type Code	Required. Enter the code by which this parameter type will be identified.
Parameter Type Name	Required. Enter the long descriptive name for this parameter type.
Active Indicator	Required. Check the box to make this parameter type active and available for selection when creating parameters. Uncheck the box if you wish to inactivate this type of parameter and prevent its selection when creating new parameters.

---

# Chapter 5. Workflow Administrative Documents

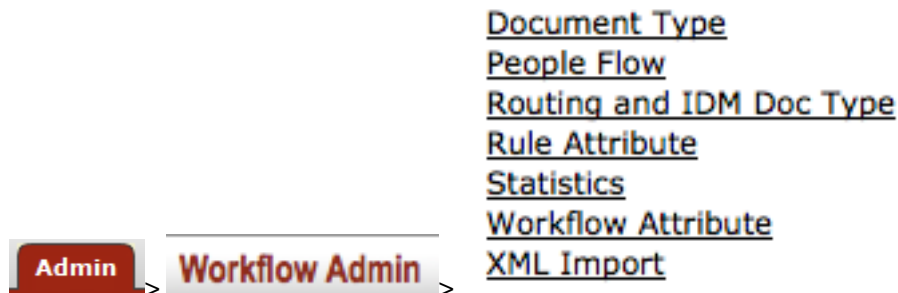


The Kuali OLE Modules submenu allows you to perform a variety of functional and technical activities that affect the entire system. This includes uploading XML and People Flow rules to modify workflows. Users may also access the Staff Upload interface.

## Note

For information on Statistics, see the section [Statistics Report](#)

## Document Type

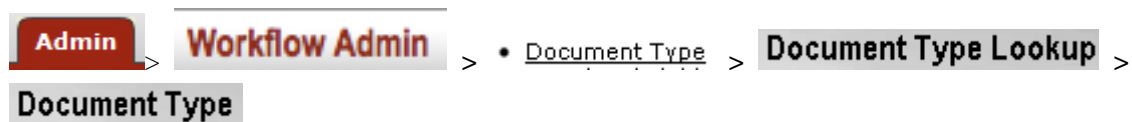

The Document Type document defines basic information about the document types that exist in OLE. It also defines document types specific to workflow and KIM. Many definitions of a document type not defined here are included in its workflow process definition and the data dictionary (a technical resource). The workflow process definition for a document type can be viewed using the Document Type lookup.

## Note

For more information about workflow, see the [OLE Workflow Overview and Key Concepts](#) on the [Guide to OLE Basic Functionality and Key Concepts](#).

Document Type documents can only be created by members of OLE-SYS Manager or KR-SYS Technical Administrator roles and they do not route for approval.

# Document Layout

The Document Type document contains the **Edit Document Type** tab and the **Fields Available for Retroactive Application** tab.

## Edit Document Type Tab

### Edit Document Type tab definition

Title	Description
Parent Name	Required. Every document type must answer to another document type in a parent/child relationship. Use the lookup to search for the document type to which this document type will answer.  Document types can inherit important definitions from their parent document types, including permissions and responsibilities.
Name	Required. The common name of the document type. For most OLE documents the name is a four-character abbreviation. Note that while the name field can support longer names (and KEW and KIM documents are examples of these) the Labor Ledger and General Ledger can only support document names up to four characters in length. If you are creating a new document type that will eventually populate the ledgers be sure to abide by this four character convention.
Document Handler URL	Optional. (Technical) Identifies the basic URL that will take a user to this document type.
Notification From Address	Optional. The email address that will appear as the 'From' address on any action list notifications sent by workflow for this document type.

	This allows several applications using workflow to maintain separate notification email addresses.
Active	Required. The box should be checked if the document type is active and available for use. Uncheck the box to inactivate the document type. Note that you cannot post labor or General Ledger OLE entries with inactive document types.

## Fields Available for Retroactive Application Tab

These are Document Type definitions that can be edited retroactively if need be. This means that should you decide to change one of these values for a given document type it is possible to apply the change retroactively to any documents of this type already created. For example, if you decided to change the Label of the Budget Adjustment document type you could choose to have that label change apply to historical Budget Adjustment documents in your OLE system.

The screenshot shows a web form titled "Fields Available for Retroactive Application" with a "hide" button. The form contains the following fields:

- Label:** A text input field.
- Description:** A larger text area.
- Help Definition URL:** A text input field.
- Apply Label Change Retroactively:** A checkbox.

### Fields Available for Retroactive Application tab definition

Title	Description
Label	The Label appears in most places where document types are displayed in results (including the action list and document search screens) and is commonly longer than the document Name, which is often an abbreviation.
Description	Optional. A text description of this document type.
Help Definition URL	Optional. (Technical) Identifies the URL where the online help content for this document type resides.
Apply Label Change Retroactively	Optional. Check this box only when updating an existing document type and only if you wish the fields on this tab to be updated on previously created versions of documents of this type.

## Document Type Inquiry

The Document Type Inquiry contains some additional fields that are not defined on this document but referenced from their source (either the corresponding workflow process definition or data dictionary information). These fields are defined below.

The screenshot shows a "Document Type Inquiry" window with an "expand all" and "collapse all" button. The window displays the following details for a document type:

- Document Type:** hide
- Parent Id:** 3029
- Parent Name:** OLEFinancialProcessingSimpleMaintenanceDocument
- Id:** 3127
- Name:** OLE\_DVWT
- Label:** Disbursement Voucher Wire Charge
- Description:**
- Document Handler URL:** \${ole.url}/kr/maintenance.do?methodToCall=docHandler (Inherited from Parent)
- Help Definition URL:** default.htm?url=WordDocuments%2Fdisbursementvoucherwirecharge.htm
- Document Search Help URL:**
- Post Processor Class:** org.kuali.ole.sys.document.workflow.PostProcessor (Inherited from Parent)
- Notification From Address:**
- Application ID:** OLE (Inherited from Parent)
- Active Indicator:** Yes


Buttons for "export" and "close" are located at the bottom of the window.



**Document Type Inquiry definition**

Title	Description
Parent ID	Display only. The unique, system-generated ID number that identifies the parent document of this Document Type.
ID	Display only. The unique, system-generated ID number that identifies this document type.
Post Processor Class	Display only. (Technical.) Identifies the post processor this document type calls upon reaching a completed workflow status (usually 'Final' or 'Processed'). The post processor is the code that tells OLE what tables to update when a document is approved.
Application ID	Display only. The namespace (large functional category) that is associated with this document type.

# PeopleFlow

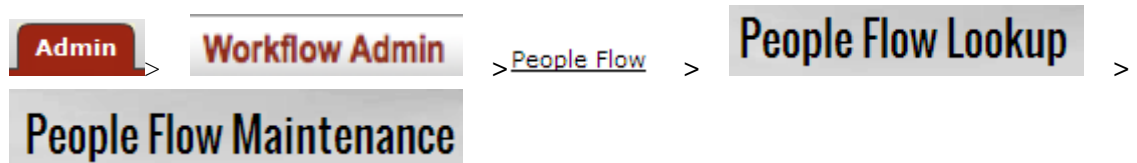

PeopleFlow is, for all intents and purposes, a prioritized list of people to send requests to. It does not require you to specify a hard coded route node in the document type for each individual who might need to approve or be notified. You can define "Stops" in a PeopleFlow, where everything in the same stop proceeds in parallel, but all must be done within the stop before proceeding to the next stop. You can call/execute a PeopleFlow from within a KEW workflow node directly, or you can invoke the Kuali Rules Management System (KRMS) engine from an application and any PeopleFlows that get selected during rule execution, defined in a KRMS agenda, will be called. In this way, you can integrate business rules across applications and workflows. The same PeopleFlow that defines a routing order among a set of persons, groups or roles can be called by KRMS rules, with the KRMS rules defining which type of request to pass to the PeopleFlow.

## Getting Started

You can search for a PeopleFlow to copy from and modify (be sure to give it a new unique name) or can create a new one (see the top right of the lookup screen).

### People Flow Lookup

[Create New](#)

<b>Id:</b>	<input style="width: 90%;" type="text"/>
<b>Namespace Code:</b>	<input style="width: 90%;" type="text"/>
<b>Name:</b>	<input style="width: 90%;" type="text"/>
<b>Type:</b>	<input style="width: 90%;" type="text"/>
<b>Active:</b>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both

# Document Layout

<b>People Flow Maintenance</b>	<b>Document Number:</b> 6374	<b>Document Status:</b> INITIATED
	<b>Initiator Network Id:</b> ole-khuntley	<b>Creation Timestamp:</b> 01:31 PM 08/30/2013

\* indicates required field

**Document Overview**

<b>* Description:</b>	<input type="text"/>	<b>Explanation:</b>	<input type="text"/>
<b>Organization Document Number:</b>	<input type="text"/>		

**PeopleFlow Summary**

<b>* Namespace Code:</b>	<input type="text"/>	<b>Description:</b>	<input type="text"/>
<b>* Name:</b>	<input type="text"/>		
<b>Type:</b>	<input type="text"/>	<b>Active:</b>	<input checked="" type="checkbox"/>

**PeopleFlow Members**

**add**

<b>* Stop:</b>	<input type="text" value="1"/>
<b>* Member Type:</b>	<input type="text" value="Principal"/>
<b>* Member:</b>	<input type="text" value="Name"/> <input type="button" value="🔍"/>

**Notes and Attachments (0)**

**Ad Hoc Recipients**

**Route Log**

The PeopleFlow document includes several unique tabs—**PeopleFlow Summary** and **PeopleFlow Members**.

## PeopleFlow Summary Tab

The **PeopleFlow Summary** tab contains information in which to both identify the PeopleFlow and where the PeopleFlow is applicable.

**PeopleFlow Summary**

<b>* Namespace Code:</b>	<input type="text"/>	<b>Description:</b>	<input type="text"/>
<b>* Name:</b>	<input type="text"/>		
<b>Type:</b>	<input type="text"/>	<b>Active:</b>	<input checked="" type="checkbox"/>


### PeopleFlow Summary tab definition


Title	Description
-------	-------------

Namespace Code	The Namespace to which this PeopleFlow will belong. A Namespace is a way to set both Permissions and Entity Attributes. Each Namespace instance is one level of Permissions and Entity Attributes and is one record in OLE. Select the Namespace from the drop down list.
Name	Required. The name of the PeopleFlow.
Type	Select the type of PeopleFlow from the drop down list to assign the PeopleFlow to more specific attributes.
Description	Enter a description of the PeopleFlow.
Active	Indicates whether this PeopleFlow is active or inactive. Remove the check mark to deactivate.


## PeopleFlow Members Tab

The **PeopleFlow Members** tab allows users to add stops and add members to the PeopleFlow. PeopleFlows that you create can be called by rules, with the rules determining whether the PeopleFlow will be called


for an action (such as approvals) or for notifications. Enter the required information and click .

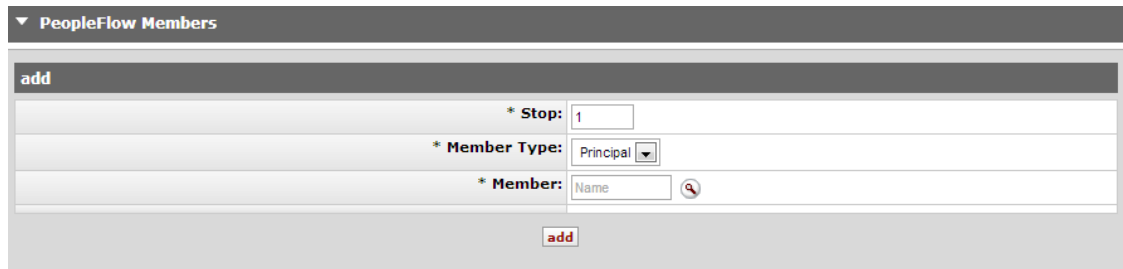

### PeopleFlow Summary tab definition

Title	Description
Stop	Required. The stops in the workflow. Everything assigned to each stop must be complete before moving on to the next stop.
Member Type	Required. Select the Member Type from the drop down list. PeopleFlows can be assigned to a Principal, a group, or a role.
Member	Enter the member to be assigned to the PeopleFlow stop or search for them from the lookup  .
All or First Action	If the <b>Member Type</b> Role or Group is selected, select <b>ALL</b> or <b>FIRST</b> from the drop down. Selecting ALL means every person in the role or group must take action. Selecting FIRST requires action from only one person.

## PeopleFlow Members Tab continued


After clicking , an additional menu appears. Below shows an example of two stops added already added:

* Stop: 3				
* Member Type: Role				
* Member: KR-LIC : OLE_LicenseReviewer				
* All or First Action: FIRST				
add				
* Stop	* Member Type	* Member	* All or First Action	Actions
1	Role	KR-LIC : OLE_LicenseReviewer	ALL	delete
<b>Member Delegates</b>				
* Member Type	* Member	* Delegation Type Code	* All or First Action	Actions
Principal	Name	Primary		add
2	Role	KR-LIC : OLE_LicenseManager	FIRST	delete
<b>Member Delegates</b>				
* Member Type	* Member	* Delegation Type Code	* All or First Action	Actions
Principal	Name	Primary		add


From here, **Member Delegates** may be added to allow others to take action for another person.

1. Enter the **Member Type** and the **Member**.
2. Select the **Delegation Type Code** from the drop down. The two choices are:
  - **Primary Delegate:** The delegator turns over his or her full authority to a primary delegate. The Action Requests for the delegator only appear in the Action List of the primary delegate.
  - **Secondary Delegate:** The secondary delegate acts as a temporary backup and has the same authority as the delegator when the delegator is not available to take action. Documents appear in the Action Lists of both the delegator and the delegate. When either acts on the document, it disappears from both Action Lists. People often have a secondary delegate who takes care of their action requests when they are out of the office.
3. Select **All of First Action** from the drop down list.

4. Click .

Click  to remove the PeopleFlow stop.

## Routing & Identity Management Document Type Hierarchy



This special view combines KIM data with OLE Document Type Hierarchy. It visually displays the parent and child relationships between OLE document types and the route nodes that are associated with each. Users may also choose to view detailed configuration for each document type, including all KIM permissions and responsibilities related to that document.

Users who are authorized to edit document types, permissions and responsibilities may access these options directly via this screen.

## Document Hierarchy View

When you access the Routing & Identity Management Document Type Hierarchy screen, the system initially displays the document hierarchy itself. Document types are indented under their parent document types.

<b>OpenLibraryEnvironmentTransactionalDocument</b>	<a href="#">Edit Document Type</a>	<a href="#">View Document Configuration</a>
<b>FinancialProcessingTransactionalDocument</b> (OLEFinancialProcessingTransactionalDocument)	<a href="#">Edit Document Type</a>	<a href="#">View Document Configuration</a>
<b>Advance Deposit (OLE AD)</b>	<a href="#">Edit Document Type</a>	<a href="#">View Document Configuration</a>
<b>Auxiliary Voucher (OLE AV)</b>	<a href="#">Edit Document Type</a>	<a href="#">View Document Configuration</a>
Account		
AccountingOrganizationHierarchy		
<b>Budget Adjustment (OLE BA)</b>	<a href="#">Edit Document Type</a>	<a href="#">View Document Configuration</a>
Account		
AccountingOrganizationHierarchy		
Award		
BudgetAdjustment		
SubFund		
<b>Cash Management (OLE CMD)</b>	<a href="#">Edit Document Type</a>	<a href="#">View Document Configuration</a>
<b>Cash Receipt (OLE CR)</b>	<a href="#">Edit Document Type</a>	<a href="#">View Document Configuration</a>
CashManagement		

To display the Document Type Inquiry for a document, click the document type name.

Users with permissions to edit document types will see an extra link displayed for each type. To initiate an OLE Document Type Maintenance document to edit a document type, click the **Edit Document Type** link for it.

If a given document type does workflow routing, then the system displays the route nodes associated with this type directly below the name of the document. Route nodes are listed in the order in which this document passes through them. Document types with branching routing logic may have further indentation displaying route nodes that a document may only pass through under certain conditions.

<b>Disbursement Voucher (DV)</b>
<b>Purchasing</b>
<b>Account</b>
<b>AccountingOrganizationHierarchy</b>
<b>Tax</b>
<b>Campus</b>
<b>Travel</b>
<b>PaymentMethod</b>
<b>Award</b>

## Document Configuration View

To open a separate window displaying additional information about a document type, click the **View Document Configuration** link.

# Workflow Administrative Documents

## Document Configuration - OLE\_OBJT

▼ hide

Name	OLE_OBJT <a href="#">Edit Document Type</a>	Doc Handler URL	
Label	Object Code	Help URL	default.htm?url=WordDocuments%2Fobjectcode.htm
Parent Name	OLEChartComplexMaintenanceDocument	Child Document Types	

▼ hide

Gray lines that are stricken through represent inherited permissions that have been overridden by a more specific permission.

**Defined For This Document**

Template Name	Permission Name	Detail Values	Granted to Roles
<b>Inherited From: OLEChartComplexMaintenanceDocument</b>			
Template Name	Permission Name	Detail Values	Granted to Roles
Initiate Document (KR-SYS)	Initiate Document (Complex COA) (OLE-SELECT)		OLE-SELECT Financial-AQ4 OLE-SELECT Accounting-AQ4 OLE-SELECT OLE User OLE-SYS User OLE-SELECT Financial-AQ5
Edit Document (KR-NS)	Edit Document (Complex COA) (OLE-SELECT)	Route Node Name = AdHoc Route Status Code = R	OLE-SELECT Financial-AQ4 OLE-SELECT Accounting-AQ4 KR-WKFLW Approve Request Recipient OLE-SELECT Financial-AQ5
<b>Inherited From: OpenLibraryEnvironmentComplexMaintenanceDocument</b>			
Edit Document (KR-NS)	Edit Document KFSM AdHoc R (OLE-SYS)	Route Node Name = AdHoc Route Status Code = R	KR-WKFLW Approve Request Recipient
<b>Inherited From: OLE</b>			
Template Name	Permission Name	Detail Values	Granted to Roles
<del>Administer Routing for Document (KR-WKFLW)</del>	<del>Administer Routing for Document KFS (OLE-SYS)</del>		<del>OLE-SYS Workflow Administrator</del>
<del>Blanket Approve Document (KR-WKFLW)</del>	<del>Blanket Approve Document KFS (OLE-SYS)</del>		<del>OLE-SYS Manager</del>
<del>Initiate Document (KR-SYS)</del>	<del>Initiate Document KFS (OLE-SYS)</del>	-	<del>OLE-SYS User</del>
<del>Open Document (KR-NS)</del>	<del>Open Document KFS (OLE-SYS)</del>		<del>KR-WKFLW Initiator or Reviewer OLE-SYS User</del>
<del>Save Document (KR-WKFLW)</del>	<del>Save Document KFS (OLE-SYS)</del>		<del>OLE-SYS System User KR-NS Document Editor</del>
<del>Delete Note / Attachment (KR-NS)</del>	<del>Delete Note / Attachment OLE FALSE (OLE-SYS)</del>	Created By Self Only = FALSE	<del>OLE-SYS Manager</del>
<del>Ad Hoc Review Document (KR-WKFLW)</del>	<del>Ad Hoc Review Document KFS A (OLE-SYS)</del>	Action Request Code = A	<del>OLE-SYS User</del>
<del>Ad Hoc Review Document (KR-WKFLW)</del>	<del>Ad Hoc Review Document KFS F (OLE-SYS)</del>	Action Request Code = F	<del>OLE-SYS Active Faculty or Staff OLE-SYS User</del>
<del>Ad Hoc Review Document (KR-WKFLW)</del>	<del>Ad Hoc Review Document KFS K (OLE-SYS)</del>	Action Request Code = K	<del>OLE-SYS Active Faculty or Staff OLE-SYS User</del>
<del>Copy Document (KR-NS)</del>	<del>Copy Document KFS (OLE-SYS)</del>		<del>KR-SYS Document Initiator</del>
<del>Add Message to Route Log (KR-WKFLW)</del>	<del>Add Message to Route Log KFS (OLE-SYS)</del>		<del>KR-WKFLW Initiator or Reviewer</del>
<del>Recall Document (KR-WKFLW)</del>	<del>Recall Document OLE (OLE-SYS)</del>		
<del>Super User Approve Single Action Request (KR-WKFLW)</del>	<del>Super User Approve Single Action Request OLE (OLE-SYS)</del>		
<del>Super User Approve Document (KR-WKFLW)</del>	<del>Super User Approve Document OLE (OLE-SYS)</del>		
<del>Super User Disapprove Document (KR-WKFLW)</del>	<del>Super User Disapprove Document OLE (OLE-SYS)</del>		
<del>Open Document (KR-NS)</del>	<del>Open Document (OLE-SELECT)</del>	-	<del>OLE-SELECT OLE User</del>
<del>Initiate Document (KR-SYS)</del>	<del>Initiate OLE Documents (OLE-SELECT)</del>	-	<del>OLE-SELECT OLE User</del>
<b>Inherited From: KualDocument</b>			
Template Name	Permission Name	Detail Values	Granted to Roles
Cancel Document (KR-WKFLW)	Cancel Document (KUALI)	Route Node Name = PreRoute	KR-WKFLW Initiator or Reviewer KR-NS Document Editor
Route Document (KR-WKFLW)	Route Document (KUALI)		OLE-SYS System User KR-NS Document Editor
Edit Document (KR-NS)	Edit KualI ENROUTE Document Node Name PreRoute (KUALI)	Route Node Name = PreRoute	KR-WKFLW Initiator
Edit Document (KR-NS)	Edit KualI ENROUTE Document Route Status Code R (KUALI)	Route Status Code = R	KR-WKFLW Non-Ad Hoc Approve Request Recipient KR-WKFLW Approve Request Recipient
Add Note / Attachment (KR-NS)	Add Note / Attachment KualI Document (KUALI)		KR-WKFLW Initiator or Reviewer
View Note / Attachment (KR-NS)	View Note / Attachment KualI Document (KUALI)		KR-NS Document Opener
Send Ad Hoc Request (KR-NS)	Send FYI Request KualI Document (KR-SYS)	Action Request Code = F	KR-NS Document Opener
Send Ad Hoc Request (KR-NS)	Send Acknowledge Request KualI Document (KR-SYS)	Action Request Code = K	KR-NS Document Opener
Send Ad Hoc Request (KR-NS)	Send Approve Request KualI Document (KR-SYS)	Action Request Code = A	KR-NS Document Editor KR-WKFLW Approve Request Recipient
Add Message to Route Log (KR-WKFLW)	Add Message to Route Log (KUALI)	-	-
Send Ad Hoc Request (KR-NS)	Send Complete Request KualI Document (KR-SYS)	Action Request Code = C	KR-NS Document Opener

▼ hide

Gray lines that are stricken through represent inherited responsibilities that have been overridden by a more specific responsibilities.

**Exception Routing**

Required	Action Details At Role Member Level	Granted to Roles	Inherited
No	No	OLE-SYS Manager	OLE

**Route Node: Organization Hierarchy**

Required	Action Details At Role Member Level	Granted to Roles	Inherited
No	Yes	OLE-SYS Organization Reviewer	OLE

**Route Node: Chart**

Required	Action Details At Role Member Level	Granted to Roles	Inherited
Yes	No	OLE-SYS University Chart Manager OLE-SYS Chart Manager	OLE

This view includes **Document Information**, **Permissions** and **Workflow / Responsibilities** tabs.



## Document Information Tab

This tab provides basic information about the document type. Much of the information here is identical to that available in the Document Type Inquiry.

Document Information <span style="float: right;">▼ hide</span>			
<b>Name</b>	<a href="#">OLE_OBJT</a> <a href="#">Edit Document Type</a>	<b>Doc Handler URL</b>	
<b>Label</b>	Object Code	<b>Help URL</b>	default.htm?url=WordDocuments%2Fobjectcode.htm
<b>Parent Name</b>	<a href="#">OLEChartComplexMaintenanceDocument</a>	<b>Child Document Types</b>	

### Document Information tab definition

Title	Description
Name	The name that uniquely identifies this type of document.  If the user viewing the Configuration screen has permission to edit document type maintenance documents, the system also displays the <b>Edit Document Type</b> link.
Label	A longer, more descriptive name for this type of document. In some cases the name and the label may be identical.
Parent Name	The type of document that is the parent to (i.e., higher than) this document type in the document type hierarchy. To display the Document Configuration view for the parent document type, click the linked parent name.
Doc Handler URL	The URL for the document handler associated with this document type. This information is helpful for technical users.
Help URL	The URL for the online help associated with this document type.
Child Document Types	If this document type is a parent, the system displays all of its types for all of its children document types. To see the document configuration view for a child document type, click the link for the desired child document type.

## Permissions Tab

This tab identifies the KIM permissions that are invoked by this type of document. Collapsible sections indicate how the document type is associated with each permission.

The **Defined for This Document** section lists permissions that specifically refer to this document type. But many document types receive most, if not all, their associated permissions by inheriting them from parent document types. Additional tabs display this inherited information and the name of the document type from which the permissions are inherited. For example, in the screenshot below, this document type inherits permissions from both [OLEChartComplexMaintenanceDocument](#) and [OpenLibraryEnvironmentComplexMaintenanceDocument](#).

Permissions <span style="float: right;">▼ hide</span>				
Gray lines that are stricken through represent inherited permissions that have been overridden by a more specific permission.				
▼ hide <b>Defined For This Document</b>				
	<b>Template Name</b>	<b>Permission Name</b>	<b>Detail Values</b>	<b>Granted to Roles</b>
▼ hide <b>Inherited From: OLEChartComplexMaintenanceDocument</b>				
	<b>Template Name</b>	<b>Permission Name</b>	<b>Detail Values</b>	<b>Granted to Roles</b>
	<a href="#">Initiate Document (KR-SYS)</a>	<a href="#">Initiate Document (Complex COA) (OLE-SELECT)</a>		<a href="#">OLE-SELECT Financial-AQ4</a> <a href="#">OLE-SELECT Accounting-AQ4</a> <a href="#">OLE-SELECT OLE User</a> <a href="#">OLE-SYS User</a> <a href="#">OLE-SELECT Financial-AQ5</a>
	<a href="#">Edit Document (KR-NS)</a>	<a href="#">Edit Document (Complex COA) (OLE-SELECT)</a>	Route Node Name = AdHoc Route Status Code = R	<a href="#">OLE-SELECT Financial-AQ4</a> <a href="#">OLE-SELECT Accounting-AQ4</a> <a href="#">KR-WKFLW Approve Request Recipient</a> <a href="#">OLE-SELECT Financial-AQ5</a>
▼ hide <b>Inherited From: OpenLibraryEnvironmentComplexMaintenanceDocument</b>				
	<b>Template Name</b>	<b>Permission Name</b>	<b>Detail Values</b>	<b>Granted to Roles</b>
	<a href="#">Edit Document (KR-NS)</a>	<a href="#">Edit Document KFSM AdHoc R (OLE-SYS)</a>	Route Node Name = AdHoc Route Status Code = R	<a href="#">KR-WKFLW Approve Request Recipient</a>
▼ hide <b>Inherited From: OLE</b>				
	<b>Template Name</b>	<b>Permission Name</b>	<b>Detail Values</b>	<b>Granted to Roles</b>
	<a href="#">Administer Routing for Document (KR-WKFLW)</a>	<a href="#">Administer Routing for Document KFS (OLE-SYS)</a>		<a href="#">OLE-SYS Workflow Administrator</a>
	<a href="#">Blanket Approve Document (KR-WKFLW)</a>	<a href="#">Blanket Approve Document KFS (OLE-SYS)</a>		<a href="#">OLE-SYS Manager</a>

Because more specific permissions override more general ones, some listed permissions may not apply. The system displays overridden permissions as gray strike-through text. In the example below the 'Initiate Document' permission inherited from OLE is overridden by a more specific permission displayed in **Inherited From: OLEChartComplexMaintenanceDocument** section.

▼ hide Defined For This Document				
Template Name	Permission Name	Detail Values	Granted to Roles	
▼ hide Inherited From: OLEChartComplexMaintenanceDocument				
Template Name	Permission Name	Detail Values	Granted to Roles	
<a href="#">Initiate Document (KR-SYS)</a>	<a href="#">Initiate Document (Complex COA) (OLE-SELECT)</a>		<a href="#">OLE-SELECT Financial-AQ4</a> <a href="#">OLE-SELECT Accounting-AQ4</a> <a href="#">OLE-SELECT OLE User</a> <a href="#">OLE-SYS User</a> <a href="#">OLE-SELECT Financial-AQ5</a>	
<a href="#">Edit Document (KR-NS)</a>	<a href="#">Edit Document (Complex COA) (OLE-SELECT)</a>	Route Node Name = AdHoc Route Status Code = R	<a href="#">OLE-SELECT Financial-AQ4</a> <a href="#">OLE-SELECT Accounting-AQ4</a> <a href="#">KR-WKFLW Approve Request Recipient</a> <a href="#">OLE-SELECT Financial-AQ5</a>	
▼ hide Inherited From: OpenLibraryEnvironmentComplexMaintenanceDocument				
Template Name	Permission Name	Detail Values	Granted to Roles	
<a href="#">Edit Document (KR-NS)</a>	<a href="#">Edit Document KFSM AdHoc R (OLE-SYS)</a>	Route Node Name = AdHoc Route Status Code = R	<a href="#">KR-WKFLW Approve Request Recipient</a>	
▼ hide Inherited From: OLE				
Template Name	Permission Name	Detail Values	Granted to Roles	
<a href="#">Administer Routing for Document (KR-WKFLW)</a>	<a href="#">Administer Routing for Document KFS (OLE-SYS)</a>		<a href="#">OLE-SYS Workflow Administrator</a> <a href="#">OLE-SYS Manager</a>	
<a href="#">Blanket Approve Document (KR-WKFLW)</a>	<a href="#">Blanket Approve Document KFS (OLE-SYS)</a>		<a href="#">OLE-SYS User</a>	
<a href="#">Initiate Document (KR-SYS)</a>	<a href="#">Initiate Document KFS (OLE-SYS)</a>	-	<a href="#">KR-WKFLW Initiator or Reviewer</a> <a href="#">OLE-SYS User</a>	
<a href="#">Open Document (KR-NS)</a>	<a href="#">Open Document KFS (OLE-SYS)</a>			

**Permissions tab definition**

Title	Description
Template Name	Display only. The name of the permissions template on which this permission is based. The template often defines, in a broad sense, what the permission controls. Similar types of permissions have the same template.
Permission Name	Display only. The name of this permission. In most cases the permission name is the same as the associated template name.  <b>Note</b>  Permission names are generally not unique because they describe types of authorization that may appear in many places throughout the application.
Detail Values	Display only. Additional detailed information that, when taken with the permission name, defines the permission's function.
Granted to Roles	Display only. The roles (i.e., the namespace and name of each role) associated with this permission. In some cases multiple roles may be associated with the same permission. To view the Role Inquiry, click the linked name of the desired role.

**Workflow / Responsibilities Tab**

This tab identifies the route nodes associated with this document type and displays critical information about the KIM responsibilities associated with them.

On this tab, the system displays route nodes in the order in which the document passes through them. The system also displays responsibility information for the Exception Routing node that will be invoked for this document type only if the document encounters an error that prevents it from completing its normal routing.




Workflow / Responsibilities <span style="float: right;">▼ hide</span>				
Gray lines that are stricken through represent inherited responsibilities that have been overridden by a more specific responsibilities.				
<b>Exception Routing</b>				
	<b>Required</b>	<b>Action Details At Role Member Level</b>	<b>Granted to Roles</b>	<b>Inherited</b>
	No	No	<a href="#">OLE-SYS Manager</a>	<a href="#">OLE</a>
<b>Route Node: Account</b>				
	<b>Required</b>	<b>Action Details At Role Member Level</b>	<b>Granted to Roles</b>	<b>Inherited</b>
	Yes	No	<a href="#">OLE-SYS Fiscal Officer</a> <a href="#">OLE-SYS Account Supervisor</a>	No
	Yes	No	<a href="#">OLE-SYS Fiscal Officer</a>	<a href="#">OLE</a>
<b>Route Node: OrganizationHierarchy</b>				
	<b>Required</b>	<b>Action Details At Role Member Level</b>	<b>Granted to Roles</b>	<b>Inherited</b>
	No	Yes	<a href="#">OLE-SYS Organization Reviewer</a>	<a href="#">OLE</a>
<b>Route Node: SubFund</b>				
	<b>Required</b>	<b>Action Details At Role Member Level</b>	<b>Granted to Roles</b>	<b>Inherited</b>
	No	Yes	<a href="#">OLE-SYS Sub-Fund Reviewer</a>	<a href="#">OLE</a>
<b>Route Node: Award</b>				
	<b>Required</b>	<b>Action Details At Role Member Level</b>	<b>Granted to Roles</b>	<b>Inherited</b>
	No	No		<a href="#">OLE</a>
<b>Route Node: Chart</b>				
	<b>Required</b>	<b>Action Details At Role Member Level</b>	<b>Granted to Roles</b>	<b>Inherited</b>
	Yes	No	<a href="#">OLE-SYS University Chart Manager</a> <a href="#">OLE-SYS Chart Manager</a>	<a href="#">OLE</a>
<b>Split Node: HasDepositAccount</b>				
<b>Route Node: DepositAccount</b>				
	<b>Required</b>	<b>Action Details At Role Member Level</b>	<b>Granted to Roles</b>	<b>Inherited</b>
	No	No	<a href="#">OLE-SELECT OLE Prepayment</a>	No

Responsibility information is presented for each route node in a standard format.

### Workflow / Responsibilities tab definition

Title	Description
Required	Display only. A Yes or No value that indicates whether this responsibility must generate action requests for this document type. If the value is 'Yes' and the document generates no requests associated with this responsibility, then the document goes into exception status. If the value is 'No' and the responsibility generates no action requests, the document continues to route as normal.
Action Details at Role Member Level	Display only. A Yes or No value that indicates where the details of this workflow action request are defined. If the value is 'Yes,' the system collects action details when members are assigned to the role. If the value is 'No,' the system collects action details when this responsibility is assigned to a role.
Granted to Roles	Display only. The roles (that is, the namespace and name of each role) associated with the responsibility at this route node. To view the Role Inquiry, click the linked name of the desired role.
Inherited	Display only. Indicates whether this responsibility is inherited from another document type. If the value is 'No,' the responsibility is specifically associated with this document type. If a document type name appears here, the responsibility is inherited from the specified document type. To view the Document Configuration Inquiry for this document type, Click the linked name.

## Rule Attribute



Rule attributes are a core KEW data element contained in a document that controls its Routing. It participates in routing as part of a Rule Template and is responsible for defining custom fields that can be rendered on a routing rule. It also defines the logic for how rules that contain the attribute data are evaluated.

Technical considerations for a Rule Attribute are:

They might be backed by a Java class to provide lookups and validations of appropriate values.

Define how a Routing Rule evaluates document data to determine whether or not the rule data matches the document data.

Define what data is collected on a rule.

An attribute typically corresponds to one piece of data on a document (i.e dollar amount, department, organization, account, etc.).

Can be written in Java or defined using XML (with matching done by XPath).

Can have multiple GUI fields defined in a single attribute.

## Statistics

Admin > Workflow Admin > Workflow Statistics

Workflow Statistics

Aggregates	
Number of Document Types:	380
Number of Users:	4
Number of Active Items In All Action Lists:	19
	OLE_PO 22
	OLE_RCVL 1
	OLE_PREQ 1
	OLE_PMC 1
	OLE_PTRN 16
	OLE_BTCH_PRCS_PRFL 21
	OLE_ACQBTHUPLOAD 1
	IdentityManagementPersonDocument 1
	OLE_SER_REC_REC 3
Number of Documents Initiated in the Last 30 Days:	OLE_DLVR_REQS 3
	OLE_BTCH_PRCS_JOB 14
	OLE_LMD 2
	OLE_FLU 1
	OLE_BLDG 1
	OLE_PRQS 2
	OLE_REQS 21
	OLE_PVEN 2
	DocumentTypeDocument 2
	OLE_BCH_PRCS_PRFL_DOC 15

Date Range

Begin Date: 01/01/1900 End Date: 01/01/2400

Routing Status	Number of Documents for Date Range
CANCELED:	0
DISAPPROVED:	0
ENROUTE:	0
EXCEPTION:	0
FINAL:	40
INITIATED:	75
PROCESSED:	2
SAVED:	13

## Workflow Attribute

Admin > Workflow Admin > Workflow Attribute > Rule Attribute Lookup

The Rule Definition Lookup allows you to search for and report on workflow rule definitions and export the definition data in XML format. Rule definitions are used by document search and the action list.

This option consists only of a lookup and inquiry screen. There is no document type associated with rule definitions.

Rule Attribute Lookup Backdoor Id admin is in use \* required field

Name:

Id:

Class Name:

Application ID:

Type:

15 items retrieved, displaying all items.

Id	Name	Class Name	Type	Application ID
1000	RuleRoutingAttribute	org.kuali.rice.kew.rule.RuleRoutingAttribute	RuleAttribute	
1003	NotificationCustomActionListAttribute	org.kuali.rice.ken.kew.NotificationCustomActionListAttribute	ActionListAttribute	
1004	NotificationChannelSearchableAttribute	org.kuali.rice.kew.docsearch.xml.StandardGenericXMLSearchableAttribute	SearchableXmlAttribute	
1005	NotificationPrioritySearchableAttribute	org.kuali.rice.kew.docsearch.xml.StandardGenericXMLSearchableAttribute	SearchableXmlAttribute	

Clicking the ID number of a given rule definition will take you to the Rule Definition Inquiry screen.

Rule Attribute hide

Id: 1000

Name: RuleRoutingAttribute

Label: Rule Routing Attribute


Description: Rule Routing Attribute

Class Name: org.kuali.rice.kew.rule.RuleRoutingAttribute

Application ID:

Type: Rule Attribute

XML Configuration:

Click the  button to download the XML associated with a particular rule definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<data xmlns="ns:workflow" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="ns:workflow resource:WorkflowData">
  <ruleAttributes xmlns="ns:workflow/RuleAttribute" xsi:schemaLocation=
  "ns:workflow/RuleAttribute resource:RuleAttribute">
    <ruleAttribute>
      <name>RuleRoutingAttribute</name>
      <className>org.kuali.rice.kew.rule.RuleRoutingAttribute</className>
      <label>Rule Routing Attribute</label>
      <description>Rule Routing Attribute</description>
      <type>RuleAttribute</type>
    </ruleAttribute>
  </ruleAttributes>
</data>
```

## XML Import




The XML Ingester allows you to upload the XML file to the KEW server. These XML files might include workflow process definition files or rule definition files.

**Ingestor**

XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
XML File:	<input type="text"/>	Browse...
<input type="button" value="upload xml data"/>		

---

# Chapter 6. KRMS Administrative Documents

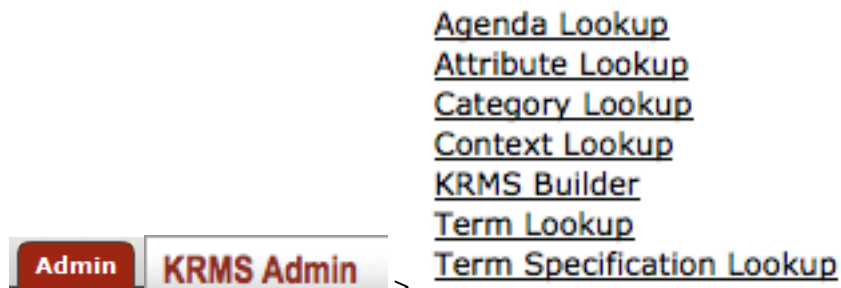


The KRMS submenu allows you to perform a variety of functional and technical activities that affect the entire system.

## Tip

A [presentation about KRMS rules](#) was done on December 4th, 2014. This presentation covers the background, an introduction to and definitions for KRMS, and then dives deeper into the functionality, architecture, and execution of rules in KRMS. The presentation and its slides, booklet, and a link to GitHub are available from the [Rice Developer Sessions](#) wiki page.

Note - the presentation gets very technical in the second half.

## Agenda Lookup

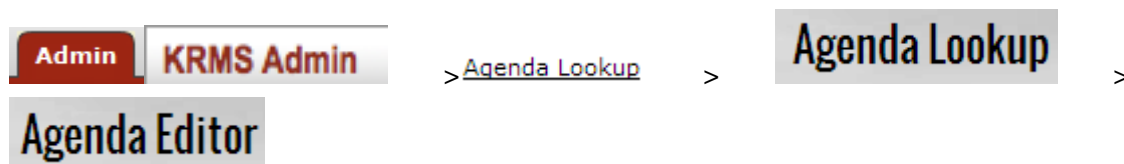

Rules in KRMS are placed into ordered sets called Agendas. The order of the Rules in an Agenda determines the sequencing: which rule gets evaluated first, second and so on. The Agenda also enables you to include conditional branching logic between Rules. In turn, Agendas are created in Contexts, which may represent any categories that are relevant within your institution. For example, they could correspond to document types or business processes or any other categories, such as licensing. Each Context contains its own agendas, and each Agenda contains its own rules. Rules aren't shared across agendas (though you can copy/paste, they become unique Rule instances), and Agendas aren't shared across Contexts. There is no Context hierarchy, that is, Agendas and Rules cannot be inherited across contexts within any sort of hierarchy.

## Tip

Copy rules to save time and typing.

## Document Layout

The screenshot shows the 'Agenda Editor' interface. At the top, there is a breadcrumb 'Home > Agenda Editor >'. Below this, the 'Agenda Editor' title is on the left, and on the right, there are two rows of metadata: 'Document Number: 3617' and 'Document Status: INITIATED' in the first row; 'Initiator Network Id: ole-khuntley' and 'Creation Timestamp: 03:40 PM 08/30/2013' in the second row. Below the metadata is a '▼ Agenda' section with a form containing: '\* Namespace:' with a dropdown menu showing 'OLE'; '\* Name:' with a text input field containing 'Enter Agenda Name' and 'size 100' below it; '\* Context:' with a text input field containing 'Enter or Lookup Context Name' and a search icon; and 'Active:' with a checked checkbox. Below the Agenda section is a 'Rules' section with a toolbar containing buttons for 'add rule', 'edit rule', 'Move: [ left, right, up, down ]', 'cut', 'paste', 'delete', and 'refresh'.


The Agenda Editor includes two unique tabs—**Agenda** and **Rules**.

### Agenda Tab

The **Agenda** tab contains information in which to both identify the Agenda itself and where the Agenda will be applied.


This is a close-up of the 'Agenda' tab form. It features a '▼ Agenda' header. The form fields are: '\* Namespace:' with a dropdown menu showing 'OLE'; '\* Name:' with a text input field containing 'Enter Agenda Name' and 'size 100' below it; '\* Context:' with a text input field containing 'Enter or Lookup Context Name' and a search icon; and 'Active:' with a checked checkbox.

#### Agenda tab definition




Title	Description
Namespace	Required. The Namespace to which this Agenda will belong.
Name	Required. The name of the Agenda. This is a unique identifier and must be unique to the namespace selected.
Context	Required. A collection of agendas, rules, terms, term specifications. Enter a Context or search for it from the lookup  .
Type	Select the type of Agenda from the drop down list to assign the Agenda to more specific attributes.
Active	Indicates whether this Agenda is active or inactive. Remove the check mark to deactivate.

### Rules tab

From the **Rules** tab, users can add multiple rules to an agenda, move rules around in the workflow, and can cut, paste and delete.

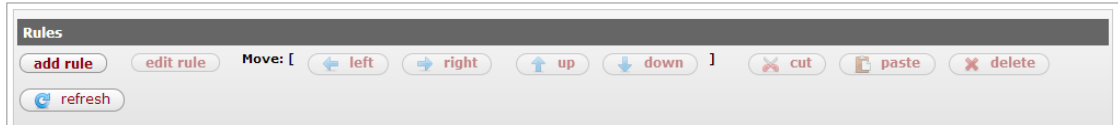

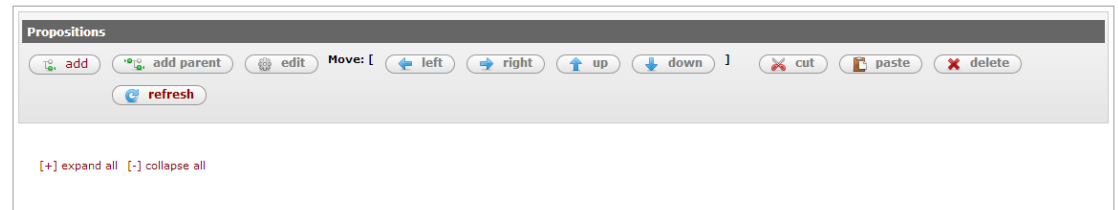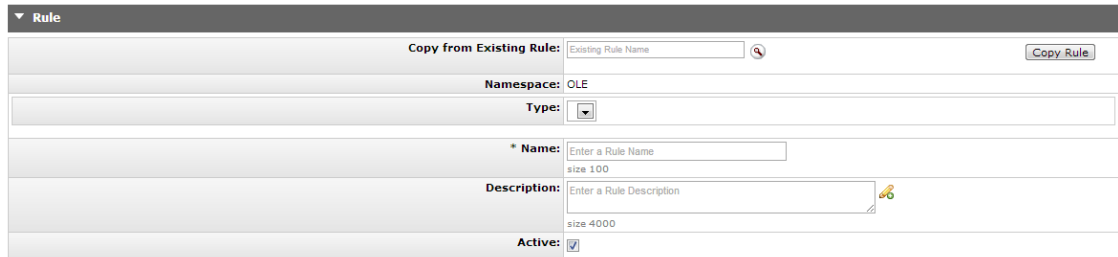

Click **add rule** to open the Rule editor and add a rule. If a rule is already listed, select the rule and click **edit rule**. The Rule Editor will open. The Rule Editor includes two unique tabs—**Rule** which also contains the **Propositions** subtab and **Action**.




## Rule

Fill in the descriptive information for the rule in the **Rule** tab

### Rule tab definition

Title	Description
Copy from Existing Rule	If a similar rule already exists, you may enter the name or search for the rule from the lookup 
Namespace	Display only. The Namespace to which this Rule will belong.
Type	Select the type of rule from the drop down list to assign the rule to more specific attributes.
Name	Required. The name of the Rule. This is a unique identifier and must be unique to the namespace selected.
Description	Enter a description for the rule. To expand the description field, click the expand icon  .
Active	Indicates whether this rule is active or inactive. Remove the check mark to deactivate.

## Add Propositions

Add a simple proposition by clicking  under the **Proposition** tab (click **add parent** to add compound propositions). Propositions are functions made up of true and false conditions. Actions can be set to occur when proposition requirements are met.

Once **add** is clicked, OLE brings up a new set of fields.

Give the proposition a **Description**.

Select a **Category**, **Term**, and **Comparison** from the drop down lists. Categories help to narrow down the terms. Terms define a piece of business data that can be used in the construction of proposition (i.e. student GPA, account number, salary, etc.). Enter the **Value** to set the term (i.e. a student GPA of 4.0, "4.0" is the value)

## Add Action

In the **Action** tab, users can define the action that will be fired when the **Proposition** is evaluated.

Select the **Type** of action from the drop down menu. Depending on your selection, additional fields will become available.

No matter what Type is selected, enter a **Name**.

This is an example of the type **Route to PeopleFlow**, which includes additional required fields:


<b>Type:</b>	Route to PeopleFlow
<b>* PeopleFlow ID:</b>	PeopleFlow ID size 40
<b>* PeopleFlow Name:</b>	PeopleFlow Name size 40
<b>* Name:</b>	Enter a Action Name size 40
<b>Description:</b>	Enter a Action Description size 4000



Click **add rule** to add this rule to the agenda.

Continue to add as many rules as necessary for the agenda. Once complete click **submit**

## Attribute Lookup

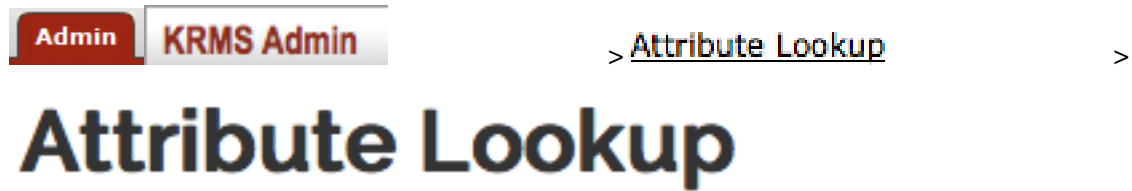

The Attribute lookup allows users to search for attributes used within KRMS rules. These are maintained by a system administrator.

## Document Layout

### Attribute Lookup

① Lookup Results: 1 message

Attribute Id:

Attribute Name:

Attribute Namespace:

Attribute Label:

Attribute Component Name:

Active?:

• 22 items retrieved, displaying all items.


Show 10 entries

Attribute Id	Attribute Name	Attribute Namespace	Attribute Label	Attribute Component Name
1000	peopleFlowId	KR-RULE	PeopleFlow	
10000	errorMessage	OLE		
10001	permissionName	OLE		
10002	circulationPolicyFound	OLE		
10003	loanPeriod	OLE		
10004	overdueDay	OLE		
10005	recallOverdueDay	OLE		
10006	overdueFine	OLE		
10007	maxFine	OLE		
10008	updateItemStatus	OLE		

Showing 1 to 10 of 22 entries   1 | 2 | 3 |


As a function of OLE, you may search for attributes. Execute a blank search to review all of them.

## Category Lookup

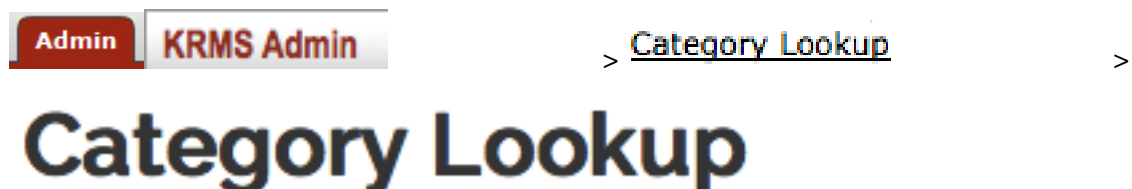

Categories are related to the Proposition within a KRMS Rule, they distinguish terms and term specifications. To specify new Terms, you will probably want to first create term categories. These are maintained by a system administrator.

The following diagram outlines the hierarchy of entities in KRMS (note that some entities are omitted)

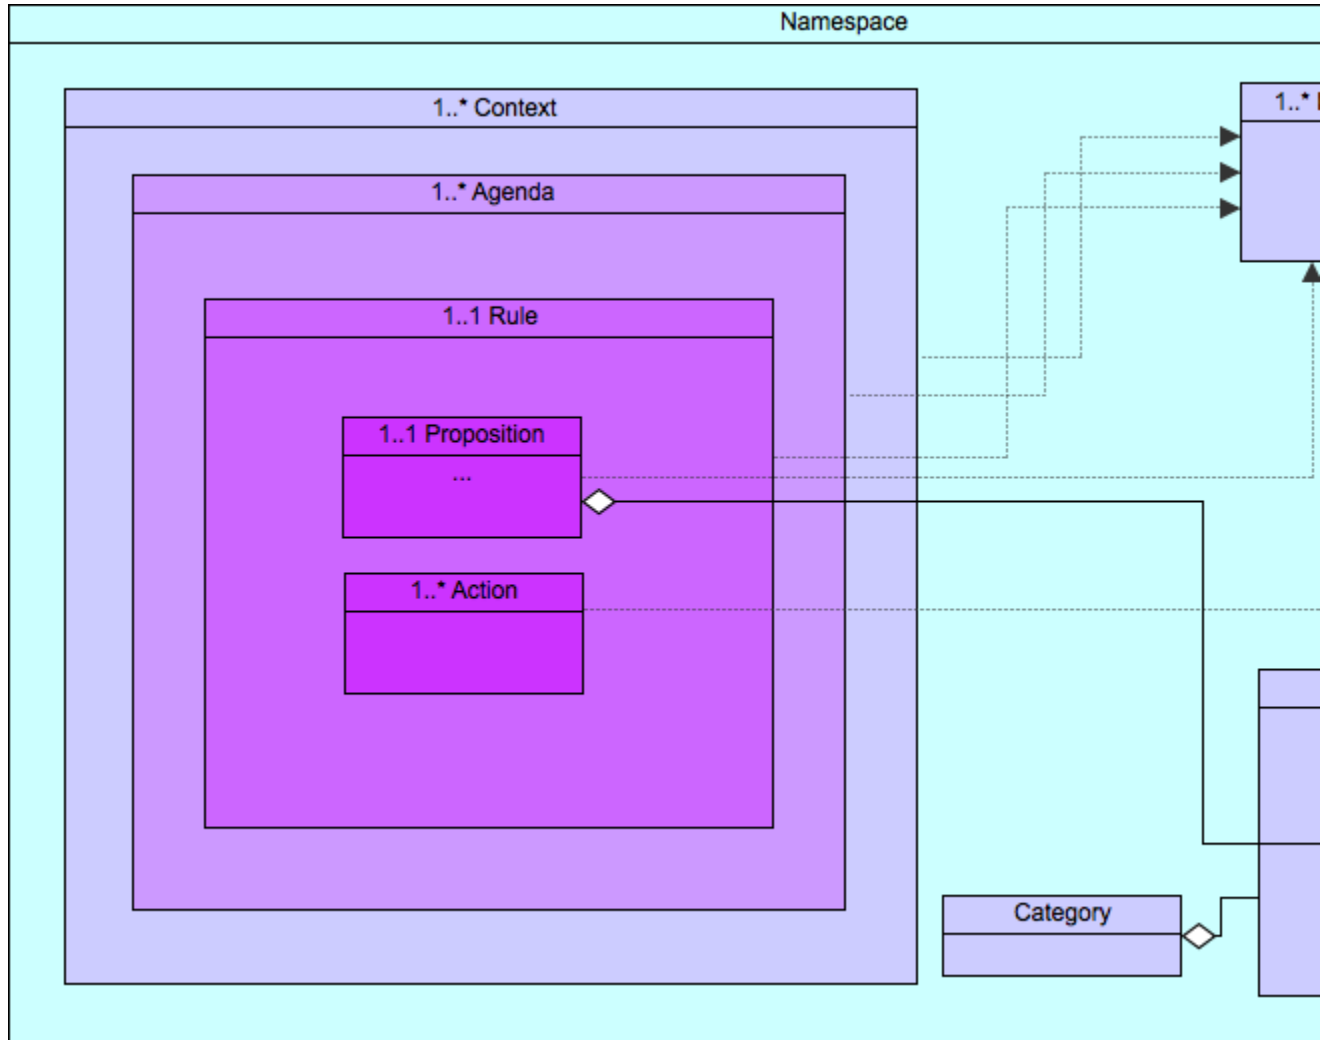

## Document Layout

### Category Lookup

① Lookup Results: 1 message

Namespace:


Name:

• 2 items retrieved, displaying all items.

Show  entries

Namespace	Name
OLE	OLE_CATEGORY
OLE	licenses

# Context Lookup

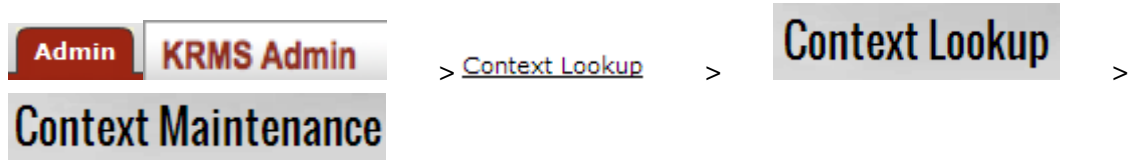

Contexts are a collection of agendas, rules, terms, term specifications. In OLE a context of "License" has been established for easy identification of the items related to the licensing business rules.

Each Context contains its own agendas, and each Agenda contains its own rules. Rules aren't shared across agendas (though you can copy/paste, they become unique Rule instances), and Agendas aren't shared across Contexts. There is no Context hierarchy, that is, Agendas and Rules can't be inherited across contexts within any sort of hierarchy.

## Document Layout

**Context Maintenance**

Document Number: 4308    Document Status: INITIATED  
Initiator Network Id: admin    Creation Timestamp: 10:18 AM 09/04/2013

[expand all](#)    [collapse all](#)  
\* indicates required field

▼ Document Overview

<p><b>* Description:</b> <input style="width: 90%;" type="text"/></p> <p>Organization Document Number: <input style="width: 50%;" type="text"/></p>	<p><b>Explanation:</b> <input style="width: 95%; height: 30px;" type="text"/></p>
---	---

▼ Context

	Old	New
<b>Id:</b>	10001	10001
<b>Name:</b>	LICENSE_CONTEXT	<input style="width: 95%;" type="text" value="LICENSE_CONTEXT"/>
<b>Namespace:</b>	OLE	<input style="width: 95%;" type="text" value="OLE"/>
<b>Type:</b>		<input style="width: 95%;" type="text" value=""/>
<b>Description:</b>		<input style="width: 95%; height: 30px;" type="text"/>
<b>Active:</b>	true	<input style="width: 95%;" type="text" value="true"/>

▶ Notes and Attachments (0)

▶ Ad Hoc Recipients

▶ Route Log

The Context Maintenance document includes the **Context** tab. The system automatically enters data into both the **Old** and **New** sections. Selected data fields are available for editing.

### Context tab definition

Title	Description
Name	The name of the Context. This is a unique identifier and must be unique to the namespace selected.
Namespace	The Namespace to which this Context will belong. Select the namespace from the drop down list.
Type	Select a type from the drop down list to assign the context to more specific attributes.
Description	Enter a description of the context.
Active Indicator	Indicates whether this context is active or inactive. Remove the check mark to deactivate the code.

## KRMS Builder



Kuali's Rule Management System (KRMS) supports the creation, maintenance, storage and retrieval of business rules and agendas (ordered sets of business rules) within business contexts (e.g., for a particular department or for a particular university-wide process). KRMS enables you to define a set of rules within a particular business unit or for a particular set of applications. These business rules define logical conditions and the set of actions that result when those conditions are met. KRMS enables you to call and use this logic from any application, without having to re-write and manage all the rules' maintenance logic within the application.

From the KRMS builder, users with the correct permissions may upload xml files into OLE.

## Krms Builder

Krms File Upload:  No file selected.

## Term Lookup



Terms are related to the Proposition within a KRMS Rule. These are maintained by a system administrator.

### Note

See the diagram under [Category](#) for a visual representation of the relation between terms, term specifications, and categories.

## Document Layout

**Term**

Document Number: 4947    Document Status: INITIATED  
 Initiator Network Id: admin    Creation Timestamp: 04:49 PM 03/11/2014

\* Indicates required field

**Term**

Description: ItemDamagedStatus

\* Namespace:

\* Specification ID: 10022

Name: ItemDamagedStatus

Value Class: java.lang.boolean

Specification Description: ItemDamagedStatus

**Categories**

Show 10 entries

ID	Namespace	Name
1	OLE	OLE_CATEGORY

Showing 1 to 1 of 1 entries

[Term Parameters](#)

## Term Specification Lookup

**Admin**    **KRMS Admin**    > Term Specification Lookup >

# Term Specification Lookup

# Term Specification

Term Specifications are also related to the Proposition within a KRMS Rule. You will need to create a term specification before creating a term. These are maintained by a system administrator.

### Note

See the diagram under [Category](#) for a visual representation of the relation between terms, term specifications, and categories.

# Document Layout

## Term Specification

Document Number: 4962 Document Status: INITIATED  
 Initiator Network Id: admin Creation Timestamp: 05:07 PM 03/11/2014

\* Indicates required field

### Term Specification

ID:	10022
* Namespace:	<input type="text"/>
* Name:	ItemDamagedStatus
* Data Type:	java.lang.boolean
Description:	ItemDamagedStatus
Active?:	true

### Contexts

[show inactive](#)

[Lookup/Add Multiple Lines](#)

Show 10 entries

cn xtn xls

* Context Id	* Context Namespace	Context Name	Description	Actions
<input type="text"/>	<input type="text"/>			add

Showing 0 to 0 of 0 entries

First Previous 1 Next Last

### Categories

[Lookup/Add Multiple Lines](#)

Show 10 entries

cn xtn xls

* ID	* Namespace	Name	Actions
1		OLE_CATEGORY	add delete

Showing 1 to 1 of 1 entries

First Previous 1 Next Last

As a function of OLE, you may search for categories. Execute a blank search to review all of them.

---

# Chapter 7. System Administration Documents



The Identity submenu group provides access to screens in order to establish and maintain user data and the associated roles and permissions in the Quali Identity Management (KIM) system. This system handles user identification, permissions, and responsibilities for multiple Quali applications, including OLE. KIM may also be used with non-Quali applications.

OLE communicates with KIM to determine each user's permissions and workflow responsibilities. These permissions and responsibilities are defined by the user's role or roles in the system. Roles can be customized to handle permissions and responsibilities in a variety of ways based on your institution's needs.

## Note

Learn more about KIM functions in the video [KIM functions \(roles, permissions, responsibilities\)](#).

## Menu Access to KIM Functions

In OLE, most KIM documents are available from the **Admin** menu tab in the **System** menu group in the **Identity** submenu group. The [Routing & Identity Management Document Type Hierarchy](#) is available in the **Configuration** menu group in the **Workflow** submenu group.

The purpose of each document in the **Identity** subgroup in the **System** menu group is explained in the following table.

## Basic KIM Concepts

This section introduces KIM permissions, responsibilities, roles, and groups as well as the Routing & Identity Management Document Type Hierarchy tool.

## KIM Permissions, Responsibilities, and Roles

Entries in KIM control user permissions to edit a document, to blanket approve transactions, and to perform many other activities in OLE.

KIM also identifies responsibilities that generate workflow action requests in OLE. When a Fiscal Officer approves a financial processing document or a Chart Manager approves a Chart of Accounts maintenance document, the user is acting on a request that has been generated by a responsibility specified in KIM.

In KIM, you do not assign permissions and responsibilities directly to individual users; instead, you associate users with roles, and you give each role an appropriate set of responsibilities and permissions. For example, the Fiscal Officer role includes permission to edit accounting lines on certain en route documents. This role also includes responsibilities that generate requests for the specific actions fiscal officers must take on documents. The Limited Circulation Attendant role includes permissions to view but not make changes to a patron record.

In the base OLE configuration, similar business functions are often grouped into a single role. Your institution may choose to assign permissions and responsibilities differently or even create its own roles to fit its business processes.

In KIM, each user is identified on the KIM Person document. This document identifies the person by a Principal ID and assigns that person to any number of roles. Role assignments may be made via the Person document or the Role document. Some types of roles, called 'derived roles,' automatically determine their members from data in other OLE components. For example, because Fiscal Officer is a definition of the Account in OLE, the Fiscal Officer role derives its assignees based on the data in the Account table. You do not need to assign users to derived roles such as this one.

## KIM Groups

Groups provide another important tool in KIM. Groups are an optional feature that allows you to associate persons, roles or other groups with each other for the purpose of making role assignments. For example, if you want to assign the same role to three users, you could create a group, assign the three users to it, and then assign the group to the desired role. (Alternatively, you could add the three users individually to the role. The choice of whether to use a group or assign individual users to roles is entirely yours.)

## Routing & Identity Management Document Type Hierarchy Tool

One more tool—the Routing & Identity Management Document Type Hierarchy—is unique to KIM. This tool allows you to view KIM permissions and responsibilities as they relate to specific OLE documents.

## Group



The Group document allows you to associate persons, roles or other groups with each other in order to assign the same role to all group members.

Groups have no inherent permissions or responsibilities of their own. Only by associating a group with a role do the members of that group become associated with permissions and responsibilities.

## Document Layout

The Group document includes **Document Overview**, **Overview**, **Definitions** and **Assignees** tabs.



<b>Group</b> ?	<b>Doc Nbr:</b> 3089	<b>Status:</b> INITIATED
	<b>Initiator:</b> admin	<b>Created:</b> 03:08 PM 06/14/2013

\* required field

**Document Overview** ▼ hide

**Document Overview**

\* **Description:**

**Organization Document Number:**

**Explanation:**

---

**Overview** ▼ hide

**Group Id:** 10000

\* **Group Namespace:**

**Active?:**

**Type Name:** Default

\* **Group Name:**

**Group Description:**

---

**Assignees** ▼ hide

Select a Group Namespace to determine if you have the appropriate permission to add members to this group

**Add Member:**

Add:	* Type Code	* Member Identifier	Name	Active From Dt	Active To Dt	Actions
<input type="button" value="add"/>	Principal	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

**Members:**

* Type Code	* Member Identifier	Namespace	Name	Full Name	Active From Dt	Active To Dt	Actions

---

**Ad Hoc Recipients** ▶ show

**Route Log** ▶ show

## Overview Tab

This tab identifies the group with a unique system-assigned ID number, a namespace and a name. Each group also has a type that specifies any qualifiers that this group might require.


**Overview** ▼ hide


<b>Group Id:</b> 10000	<b>Type Name:</b> Default
* <b>Group Namespace:</b> <input type="text"/>	* <b>Group Name:</b> <input type="text"/>
<b>Active?:</b> <input checked="" type="checkbox"/>	<b>Group Description:</b> <input type="text"/>

### Overview tab definition

Title	Description
Group ID	Display only. The unique system-assigned ID number that identifies this group. The system completes this field when you submit the document.
Type Name	Required. The type of definitions that will be associated with this group. Some group types, such as the Default Type, require no definitions to be collected.  <b>Note</b>  When creating a new group, you must select the Type before the system can generate the document. See below.
Group Namespace	Required. An indicator that associates the group with a particular application and module.
Group Name	Required. The common descriptive name by which this group is known.
Active	Check this box to indicate that this Group is active and is a valid choice for assigning to roles. Uncheck the box to indicate that this group is inactive (no longer valid when making role assignments).
Group Description	Additional description field for the group.

## Type Name

When you click the lookup button , the system displays the KIM Type Lookup screen. You must search for and select an existing Type in order for the system to generate a new Group document.

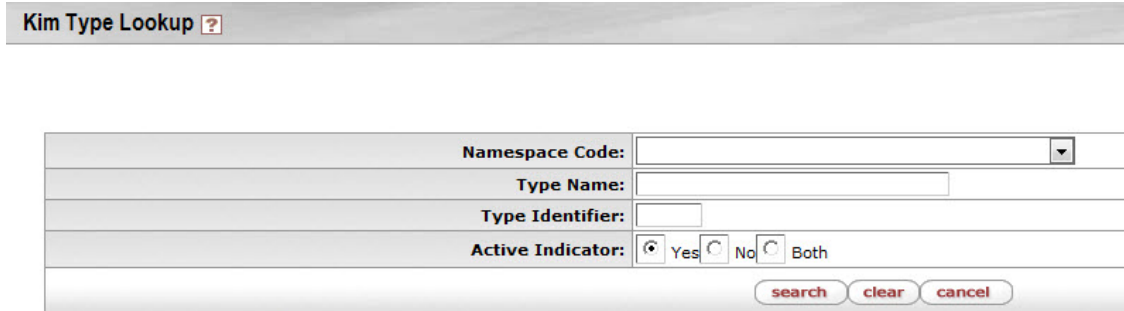


This lookup is used whenever you create a new group or role. The search definitions are explained below.

### KIM Type Lookup definition

Title	Description
Namespace Code	Optional. Select the code identifying the application and module this KIM type pertains to.
Type Name	Optional. Enter the name identifying this KIM type.
Type Identifier	Optional. Enter the unique system-assigned identifying number for this KIM type.
Active Indicator	Required (defaults to 'Yes'). Change the default selection to view KIM types that are inactive or are both active and inactive.

The display of search results includes the same fields as the Lookup screen. To select the type you want to use for your new group, click the return value link for it.

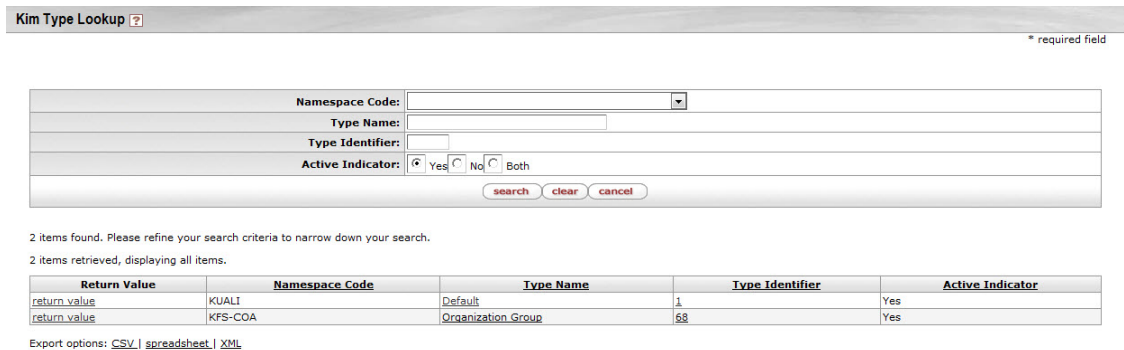

Return Value	Namespace Code	Type Name	Type Identifier	Active Indicator
<a href="#">return value</a>	KUALI	Default	1	Yes
<a href="#">return value</a>	KFS-COA	Organization Group	68	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

## Definitions Tab

This tab contains any definitions specific to this group's type. For example, if a group has a type of Chart and Organization, this tab will record the Chart and Organization values that are specific to this group. In the example below a Chart Code and Organization Code are required for establishing groups of this type.



## Assignees Tab

This tab contains the members who belong to this group. It can also be used to add new members or edit the values associated with existing members.

Assignees hide

Select a Group Namespace to determine if you have the appropriate permission to add members to this group


**Add Member:**

	* Type Code	* Member Identifier	Name	Active From Dt	Active To Dt	Actions
Add:	Principal	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>


**Members:**

	* Type Code	* Member Identifier	Namespace	Name	Full Name	Active From Dt	Active To Dt	Actions

### Assignees tab definition

Title	Description
Type Code	Required. Select the type of member you are adding to this group. Group members can be principals (as defined on the Person document), roles or other groups.
Member Identifier	Required. Enter the ID that identifies the member you are adding or use the lookup  to search for and select a valid Member ID. The lookup directs you to the <b>Principal</b> , <b>Group</b> or <b>Role</b> lookup based on your Member Type Code selection.
Name	Display only. Displays the name of the member you've selected.
Active From Dt	Optional. To specify the earliest date on which this member is to be considered a valid member of this group, enter a From Date.
Active To Dt	Optional. To specify a date on which this member is no longer to be considered a valid member of this group, enter a To Date.
	<p><b>Note</b></p> <p>Note that you cannot delete or inactivate group members. To remove a member from a group enter an Active To Date.</p>
Actions	Click the <b>Add</b> button to add this member to the group.

## Permission



The Permission document allows you to create new permissions or edit existing ones. The Permission Lookup allows you to search for and view existing permissions. You can view summarized information about the permission detail values as well as the roles that are currently associated with this permission.

Only members of OLE-SYS Technical Administrator or OLE-SYS Manager role can create or modify Permission documents. These documents do not route for approval.

### Note

Extreme caution should be exercised when modifying existing permissions or adding new ones. Even small changes can have application-wide consequences. Changes should be made only after sufficient testing with your local configuration.

**Permission Lookup** create new  
\* required field

Template Namespace:	<input type="text"/>
Template Name:	<input type="text"/>
Permission Namespace:	<input type="text"/>
Permission Name:	<input type="text"/>
Role Namespace:	<input type="text"/>
Role Name:	<input type="text"/>
Principal Name:	<input type="text"/>
Group Namespace:	<input type="text"/>
Group Name:	<input type="text"/>
Attribute Value:	<input type="text"/>
Template Id:	<input type="text"/>
Active Indicator:	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

**Permission Lookup search criteria**

Title	Description
Template Namespace	Optional. To search for a permission based on its template namespace (that is, the name of the application and module to which its template belongs), select the appropriate namespace.
Template Name	Optional. To search for a permission based on the name of the template it is based on, enter the appropriate template name.
Permission Namespace	Optional. To search for a permission based on its namespace, select the appropriate permission namespace.
Permission Name	Optional. To search for a permission by name, enter its name.
Role Namespace	To search for a permission based on the namespace of the role to which it is assigned, enter the appropriate role namespace.
Role Name	Optional. To search for a permission based on the role to which it is assigned, enter the appropriate role name.
Principal Name	Optional. To search for a permission based on the principals that currently have this permission through their association with a role, enter an appropriate principal name.
Group Namespace	Optional. To search for a permission based on the namespace of groups that have this permission through the group's association with a role, enter an appropriate group namespace.
Group Name	Optional. To search for a permission based on the name of a group that has this permission through its association with a role, enter an appropriate group name.
Attribute Value	Optional. A specific permission detail value associated with a permission
Template ID	Numerical value of the template namespace

31 items retrieved, displaying all items.

Actions	Template Namespace	Template Name	Permission Namespace	Permission Name	Permission Description	Permission Detail Values	Granted to Roles
edit copy	KFS-SYS	Claim_Electronic Payment	KFS-SYS	Claim_Electronic Payment	Allows access to the Electronic Fund Transfer interface for the claimi...		KFS-SYS Treasury Manager
edit copy	KFS-SYS	Error_Correct Document	KFS-SYS	Error_Correct Document	Allows access to the Error Correction button on KFS Transactional docu...	Document Type Name : KFST	KR-SYS Document Initiator

The Permission results display contains the fields described in the table below.

**Permission Lookup results fields**

Title	Description
Actions	Actions allow selection of edit or copy for each permission displayed.
Template Namespace	The code identifying the application and module the template pertains to. Because templates tend to be general categories, they are often associated with system-level namespaces.

Template Name	The template the permission is based on. A template usually defines, in a broad sense, what the permission controls. Similar types of permissions share the same template.
Permission Namespace	The code designating the application and module this permission is associated with.
Permission Name	The descriptive name for this permission. In most cases this will match the Template Name.
Permission Description	Display only. Detailed information that describes the permission and its purpose.
Permission Detail Values	<p>Display only. Detailed information that, in combination with the permission name, defines the permission's function.</p> <p>For example, if the permission name is 'Initiate Document,' the Permission Detail Values field indicates the specific type of document the initiate permission pertains to.</p> <p>Permission detail values can include many different types of data. Some common types are defined below.</p> <p>documentTypeName: The name of the document type associated with this permission.</p> <p>routeNodeName: The point in a document's workflow routing at which this permission becomes relevant.</p> <p>routeStatusCode: The routing status that a document must be in for this permission to apply.</p> <p>propertyName: Often, a field or document element that the permission pertains to.</p>
Granted to Roles	Lists the namespace and name of roles that have this permission. Click on the linked name to view the Role inquiry.

To view an Inquiry screen for a permission, select the Permission Name of the appropriate row in the search results. The Inquiry screen contains the same information as the Search Results in a slightly different format.

**Permission Inquiry** expand all collapse all

---

Permission Attributes hide

<b>Template Namespace:</b>	<a href="#">KFS-SYS - Financial System</a>
<b>Template Name:</b>	<a href="#">Claim Electronic Payment</a>
<b>Permission Namespace:</b>	<a href="#">KFS-SYS - Financial System</a>
<b>Permission Name:</b>	<a href="#">Claim Electronic Payment</a>
<b>Permission Description:</b>	Allows access to the Electronic Fund Transfer interface for the claiming of electronic funds.

---

Permission Detail Values hide

---

Permission Assigned Roles hide

<b>Assigned Roles(KFS-SYS - Financial System-Treasury Manager-Default)</b>	
Namespace: <a href="#">KFS-SYS - Financial System</a>	Role Name: <a href="#">Treasury Manager</a>
Role Type Name: <a href="#">Default</a>	

close

## Document Layout

The Permission document includes **Document Overview**, **Permission Info**, and **Permission Details** tabs.

<b>Permission</b> <span>?</span>		<b>Doc Nbr:</b> 3297	<b>Status:</b> INITIATED
		<b>Initiator:</b> amdload	<b>Created:</b> 09:09 PM 09/06/2009

[expand all](#) | [collapse all](#)  
\* required field

**Document Overview** hide

**Document Overview**

\* **Description:**

**Org. Doc. #:**

**Explanation:**

---

**Permission Info** hide

**New**

**Permission Identifier:** 10001

\* **Template Id:**

\* **Permission Namespace:**

\* **Permission Name:**

**Permission Description:**

\* **Active Indicator:**

---

**Permission Details** hide

**New**

**Permission Details:**

---

**Notes and Attachments (0)** show

**Ad Hoc Recipients** show

**Route Log** show

## Permission Info Tab

This tab identifies the permissions with a unique system-assigned ID number, a template, namespace, name and description.

**Permission Info** hide

**New**

**Permission Identifier:** 10005

\* **Template Id:**

\* **Permission Namespace:**

\* **Permission Name:**

**Permission Description:**

\* **Active Indicator:**

### Permission Info tab definition

Title	Description
Permission Identifier	Display only. The unique, system-assigned ID number that identifies this permission.
Template ID	Required. Select the Template this permission is associated with. Templates identify broad permission types.
Permission Namespace	Required. An indicator that associates the permission with a particular application and module.
Permission Name	Required. A text name identifying this permission.
Permission Description	Optional. Enter a text description of what this permission does.
Active Indicator	Required (defaults to 'Yes'). Change the default selection if you wish this permission to be inactive. Inactive permissions will be disregarded by KIM when doing permission checks.


## Permission Details Tab

This tab identifies the permission values that KIM needs to make this permission function. These values vary greatly depending on the type of permission being created. It is highly recommended that users view similar permissions (those with the same Template ID) and discuss Permission Details with technical resources to ensure values are entered correctly.

### Permission Details tab definition

Title	Description
Permission Details	Optional (though most permissions require some details to be functional). Enter the permission details specific to this permission. Details should be entered as the name of the property followed by an '=' followed by the value of the property. When entering multiple details they should be separated by a hard return in the text box, such as:  componentName=IdentityManagementPersonDocument

## Person



The Person document allows you to identify each user to KIM (and, by extension, to OLE). Each Person document includes data about a user's relationship with your institution as well as the roles and groups to which this person belongs.

In KIM a person is a unique combination of an 'entity ID' and a 'principal ID.' The entity ID represents a person with a unique number, and the document associates the entity ID with the user's principal ID number and principal name (often referred to as a user name or user ID). When searching for or working with users in KIM, you usually reference either the principal ID or the principal name. A single entity ID can have multiple principals associated with it, but the base OLE implementation of KIM assumes that each entity ID has only a single principal.

### Note

Note that initiation of the Person document is restricted to members of the KR-SYS Technical Administrator or OLE-SYS Manager role.

## Document Layout

The Person document includes **Overview**, **Contact**, **Privacy Preferences**, and **Membership** tabs.

Person <span>?</span>	Doc Nbr: 3496	Status: INITIATED
	Initiator: gle-khuntlev	Created: 02:34 PM 06/14/2013

\* required field

Document Overview

**Document Overview**

* Description:	<input type="text"/>	Explanation:	<input type="text"/>
Organization Document Number:	<input type="text"/>		

Overview

Entity Id:	1	Principal Id:	1
* Principal Name:	kr	Active:	Yes

**Affiliations**

* Affiliation Type	* Campus Code	Default	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Contact

**Names**

Name Code	Name Prefix	* First Name	* Last Name	Name Suffix	Default	Active	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

**Addresses**

Address Type	Line 1	Line 2	Line 3	City	State/Province	Postal Code	Country	Default	Active	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

**Phone Numbers**

Phone Type	Phone Number	Extension	Country	Default	Active	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

**Email Addresses**

Email	Type	Default	Active	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Privacy Preferences

Suppress Name:	No	Suppress Address:	No
Suppress Personal:	No	Suppress Email:	No
Suppress Phone:	No		

Membership

**Groups**

Group	Namespace Code	Name	Type	Active From Date	Active To Date	Actions
Add: <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

**Roles**

Role	Namespace Code	Name	Type	Active From Date	Active To Date	Actions
Add: <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>
1	90	KR-SYS	System User	Default		

**Delegations**

Role Member	Active From Date	Active To Date	Delegation Type Code	Actions
Add: <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>

Ad Hoc Recipients

Route Log

## Overview Tab

The **Overview** tab identifies the person as a unique combination of entity and principal ID. It also contains information about how this person is affiliated with your institution. Two types of affiliations—staff and faculty—contain additional data elements to further define a person's relationship with your institution.

The instructions below assume that you are manually completing this information. Many institutions may want to either have this data fed from an existing person database or simply override this information with existing person data.

Overview

Entity Id:	1	Principal Id:	1
* Principal Name:	kr	Active:	Yes

**Affiliations**

* Affiliation Type	* Campus Code	Default	Actions
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

## Overview Section

The first section in the **Overview** tab is the **Overview** section.

### Overview section Definitions

Title	Description



Entity Id	<p>Display only. The unique ID number identifying this person in your database. An individual may have multiple principal IDs but only one entity ID. The base OLE implementation assumes that each user will have only one entity ID and one principal ID.</p> <p>The system completes this entry automatically when you save or submit the document.</p>
Principal ID	<p>Display only. The unique ID number identifying this principal. Whereas Entity ID represents a unique person, principal represents a set of login information for that person. When selecting a person, you ordinarily reference his or her principal ID.</p> <p>The system completes this entry automatically when you save or submit the document.</p>
Principal Name	Required. Enter the user name by which this principal is to be identified.
Principal Password	Optional. Enter the password for this principal ID.
Active	Check the box to indicate that this principal ID is active. Uncheck the box to indicate that this principal ID is inactive.

Use the **Affiliations** section of the **Overview** tab to add affiliations for this principal ID. Depending on the affiliation type added, you may need to complete additional fields.

### Affiliations section definition

Title	Description
Affiliation Type	<p>Optional. Select the type of affiliation from the list. Options include:</p> <p>Affiliate: An affiliation for users in your system that are neither employees nor students. Faculty: A faculty employee. Staff: A non-faculty employee. Student: A non-employee identified as a student of your institution.</p> <p><b>Note</b></p> <p>Affiliation types of Faculty and Staff require additional information (see below).</p>
Campus Code	Required. Select the campus code associated with this affiliation.
Default	Check the box to indicate that this affiliation is this principal's default association with your institution. Each principal must have at least one default affiliation.
Actions	Click the <b>Add</b> button to add the affiliation.

If you have selected an Affiliation of 'Faculty' or 'Staff,' the system displays additional fields to collect employment information.

The screenshot shows a form titled "Employment Information" with the following fields: "Add:" (with a plus icon), "Employment Id" (text input), "Primary" (checkbox), "Employee Status" (dropdown menu), "Employee Type" (dropdown menu), "Base Salary Amount" (text input), "Primary Department Code" (text input), and "Actions" (with a plus icon).

### Employment Information fields definition

Title	Description
Employment ID	Optional. Enter the Employment ID number associated with this faculty or staff affiliation. Ordinarily this entry is the ID number identifying this principal in your HR system.
Primary	Check the box to indicate that this faculty or staff affiliation represents the principal's primary job with your institution. Each principal with a faculty or staff affiliation must have exactly one affiliation marked as 'primary.'
Employee Status	<p>Required. Select a value to identify the current status of this faculty or staff affiliation. Options include:</p> <p>Active, Deceased, On Non-Pay Leave Status, Not Yet Processed, Processing, Retired, Terminated</p>

Employee Type	Required. Select a value to indicate the type of employment for this affiliation. Options include Non-Professional, Other, and Professional
Base Salary Amount	Required. Enter the base salary yearly amount earned for this faculty or staff affiliation.
Primary Department Code	Optional. Enter the code for the department associated with this faculty or staff affiliation. OLE-SYS User role parses this field to determine the default chart and organization for a user if it is formatted as 'Chart-Organization Code' such as BL-PSY or BA-PARK.
Actions	Click the <b>Add</b> button to add this row of employment information.

## Contact Tab

The **Contact** tab records the names, addresses, phone numbers and email addresses associated with this Person record. Any Person record can store multiple records for contact information of each type (name, address, phone number, and email address), with one value of each type identified as the default value for the Person record.

The screenshot shows the 'Contact' tab interface with a 'hide' button. It contains four main sections:

- Names:** A table with columns: Name Code (dropdown: Other), Name Prefix (dropdown), \* First Name, \* Last Name, Name Suffix (dropdown), Default (checkbox), Active (checkbox checked), and Actions (add button).
- Addresses:** A table with columns: Address Type (dropdown: Home), Line 1, Line 2, Line 3, City, State/Province (dropdown), Postal Code, Country (dropdown), Default (checkbox), Active (checkbox checked), and Actions (add button).
- Phone Numbers:** A table with columns: Phone Type (dropdown: Home), Phone Number, Extension, Country (dropdown), Default (checkbox), Active (checkbox checked), and Actions (add button).
- Email Addresses:** A table with columns: Email, Type (dropdown: Home), Default (checkbox), Active (checkbox checked), and Actions (add button).

## Names Section

Names								
	Name Code	Name Prefix	* First Name	* Last Name	Name Suffix	Default	Active	Actions
Add:	Other					<input type="checkbox"/>	<input checked="" type="checkbox"/>	add

### Names section definition

Title	Description
Name Code	Optional. Select the type of name to be added in this row. Options include: Other, Preferred, Primary
Name Prefix	Optional. Select the appropriate title for the name being added in this row. Options include: Ms, Mrs, Mr, Dr
First Name	Optional. Enter the first name for this record.
Last Name	Optional. Enter the last name for this record.
Name Suffix	Optional. Select a suffix for this name record. Options include: Jr, Sr, Mr, Md
Default	Check this box to indicate that this Name record is to be used as the default for this person. Each Person record must have exactly one Name record identified as the default.
Active	Check the box to indicate that this Name record is active. Uncheck the box to indicate that this record should be considered inactive.
Actions	Click the <b>Add</b> button to add this Name record.

## Addresses Section

Addresses											
	Address Type	Line 1	Line 2	Line 3	City	State/Province	Postal Code	Country	Default	Active	Actions
Add:	Home								<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="button" value="add"/>

### Addresses section definition

Title	Description
Address Type	Optional. Select the type of address being added on this row. Options include: Home, Other, Work
Line 1-3	Optional. Use lines 1, 2 and 3 to enter the street address for this row.
City	Optional. Enter the city associated with this address.
State/Province	Optional. Select the state or province associated with this address from the list.
Postal Code	Optional. Enter the postal code associated with this address.
Country	Optional. Select the country associated with this address.
Default	Check this box to indicate this address record should be used as the default. A Person record can have no more than one default Address record.
Active	Check this box to indicate that this Address record is active. Uncheck the box to indicate that this record is inactive.
Actions	Click the <b>Add</b> button to add this Address record.

## Phone Numbers Section

Phone Numbers							
	Phone Type	Phone Number	Extension	Country	Default	Active	Actions
Add:	Home				<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="button" value="add"/>

### Phone Numbers section definition

Title	Description
Phone Type	Optional. Select the type of phone number being added on this row. Options include: Home Mobile Other Work
Phone Number	Optional. Enter the area code and phone number.
Extension	Optional. Enter the appropriate extension.
Country	Optional. Select the country associated with this Phone Number record.
Default	Check this box to indicate that this Phone Number record should be used as the default. A Person record can have no more than one default Phone Number record.
Active	Check this box to indicate that this Phone Number record is active. Uncheck the box to indicate that this record is inactive.
Actions	Click the <b>Add</b> button to add this Phone Number record.

## Email Addresses Section

Email Addresses					
	Email	Type	Default	Active	Actions
Add:		Home	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="button" value="add"/>
1	test@email.edu	Work	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="button" value="delete"/>

### Email Address section definition

Title	Description
Email	Optional. Enter the email address for this record.

Type	Optional. Select the type of email address being added on this row. Options include: Home, Other, Work
Default	Check this box to indicate that this Email Address record should be used as the default. A Person record can have no more than one default Email Address record.
Active	Check this box to indicate that this Email Address record is active. Uncheck the box to indicate that this record is inactive.
Actions	Click the <b>Add</b> button to add this Email Address record.

## Privacy Preferences Tab

### Note

Note that no role in the base data configuration can modify this privacy preferences information. If you wish this capability to be available via the user interface, you must assign the 'Override Entity Privacy Preferences' permission to a role.

The **Privacy Preferences** tab allows you to suppress the display of fields on the Contact Tab.

Privacy Preferences	<input type="checkbox"/>
Suppress Name:	<input type="checkbox"/>
Suppress Personal:	<input type="checkbox"/>
Suppress Phone:	<input type="checkbox"/>
Suppress Address:	<input type="checkbox"/>
Suppress Email:	<input type="checkbox"/>

### Privacy Preferences tab definition

Title	Description
Suppress Name	Optional. Check this box to specify that the system is not to display this person's names.
Suppress Personal	Optional. Do not display this person's personal data. This selection currently performs no function in OLE.
Suppress Phone	Optional. Check this box to specify that the system is not to display this person's phone numbers.
Suppress Address	Optional. Check this box to specify that the system is not to display this person's addresses.
Suppress Email	Optional. Check this box to specify that the system is not to display this person's email addresses.

## Membership Tab


The **Membership Tab** allows you to associate a person with groups and roles and, by extension, with KIM permissions and responsibilities. *Assigning a person to a role is the most direct way to give a user KIM permissions and responsibilities.*

Membership							
▼ hide Groups							
Group	Namespace Code	Name	Type	Active From Date	Active To Date	Actions	
Add:	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>	
▼ hide Roles							
Role	Namespace Code	Name	Type	Active From Date	Active To Date	Actions	
Add:	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="button" value="add"/>	
▼ hide Delegations							
Role Member	Active From Date	Active To Date	Delegation Type Code		Actions		
Add:	<input type="text"/>	<input type="text"/>	<input type="text"/>		<input type="button" value="add"/>		

The tab is divided into three sections, one for managing assignments to **Groups**, another for **Roles**, and a third for **Delegations**.


## Groups Section

### Groups section definition

Title	Description
Group	Optional. Enter the name of the KIM group you want to assign this person to. You can also use the Group lookup  to search for and select a valid value.
Namespace Code	Display only. After you select a group to add this person to, the namespace code associated with the selected group is displayed.
Name	Display only. After you select a group to add this person to, the name of that group is displayed.
Type	Display only. After you select a group to add this person to, the type associated with the selected group is displayed.
Active From Date	Optional. If this user's assignment to this group is to be effective as of a certain date, enter that date here.
Active To Date	Optional. If this user's assignment to this group is to terminate as of a certain date, enter that date here.  <p style="text-align: center;"><b>Note</b></p> <p>There is no way to delete a person's assignment to a group. To remove a person from a group, use this field to specify a date in the past.</p>
Actions	Click the <b>Add</b> button to add this group assignment.

## Roles Section

### Roles section definition

Title	Description
Role	Optional. Use the Name lookup  to search for and select the role you want to assign this person to.
Namespace Code	Display only. After you select a role to assign to this Person record, the system displays the namespace code associated with that role.
Name	Display only. After you select a role to assign to this Person record, the system displays the name associated with that role.
Type	Display only. After you select a role to assign to this Person record, the system displays the role type associated with the selected role here.
Active From Date	Optional. If this user's assignment to this role is to be effective as of a certain date, enter that date here.
Active To Date	Optional. If this user's assignment to this role is to terminate as of a certain date, enter that date here.  <p style="text-align: center;"><b>Note</b></p> <p>Note that there is no way to delete a person's assignment to a role. To remove a person from a role, use this field to specify a date in the past.</p>
Actions	Click the Add button to add this role data.


## Note

When assigning some roles, you may need to supply additional qualifying values that further define this person's assignment. For more information about role qualifiers, see [Role](#).

## Delegations Section

Delegations allow you to set a user as a primary or secondary delegate for a current member of a role. The delegate has the same permissions as the role member and is able to act on action requests generated for the role member by KIM.

Delegations section definition

Title	Description
Role Member	Optional. Use the Role Member lookup  to search for and select the role and role member you wish to add a delegation for.
Active From Date	Optional. If this delegation is to be effective as of a certain date, enter that date here.
Active To Date	Optional. If this delegation is to terminate as of a certain date, enter that date here.  <p><b>Note</b></p> <p>Note that there is no way to delete a person's delegation. To remove a person from a role, use this field to specify a date in the past.</p>
Delegation Type Code	Optional. This defines how the delegate will be able to access workflow action requests generated to the delegating role member. Options are 'Secondary' (the user must use the secondary delegate action list filter to view action requests) and 'Primary' (action requests will route directly to the delegate's action list).
Actions	Click the <b>Add</b> button to add this delegation data.

## Process Overview

1. Enter the required fields and any additional information to the **Overview** and **Contact** tabs.
2. Add roles as desired on the **Membership** tab.
3. Include additional information to the Person document.
4. Save or submit the Person document.

### Note

In OLE 1.5 after clicking **Submit** and receiving the system response "Document was successfully submitted", if you click **Close** OLE will ask "Would you like to save this document before you close it?" Select **No**. If you select Yes, the system will give you a stack trace error. Your changes will be saved in the system.

Additionally, after clicking **Save** and receiving the system response "Document was successfully submitted", if you click **Close** OLE will ask "Would you like to save this document before you close it?" Select **No**. Your changes will be saved in the system.

See OLE-5972 for additional details.

## Business Rules

- A person must have at least one affiliation.
- Each faculty or staff affiliation must have at least one Employment Information record associated with it.

- If a person has any faculty or staff affiliations then one Employment Information record must be marked as 'primary'.
- Each person must have a default Name record in the Contacts section.
- Each affiliation must be associated with a campus.
- Each type of contact information can have only one record marked as the default.

## Routing

Only members of OLE-SYS Manager or KR-SYS Technical Administrator roles can initiate Person documents. In OLE base data configuration, the KIM Person document does not route for approval.

## Responsibility



The Responsibility document allows you to create new responsibilities or edit existing ones. The Responsibility Lookup allows you to search for and view existing responsibilities. You can view summarized information about the responsibility detail values as well as the roles with which the responsibility is currently associated.

Only members of OLE-SYS Technical Administrator or OLE-SYS Manager role can create or modify a Responsibility document and it does not route for approval. Information about the Responsibility document follows detailed information about the Responsibility Lookup below.

### Note

Caution should be exercised when modifying existing responsibilities or adding new ones. Relatively minor changes can result in disruptions to the workflow of documents if made in error. Changes should be made only after sufficient testing with your local configuration.

**Responsibility Lookup** ?

Template Namespace:	<input type="text"/>	<input type="button" value="v"/>
Template Name:	<input type="text"/>	
Responsibility Namespace:	<input type="text"/>	<input type="button" value="v"/>
Responsibility Name:	<input type="text"/>	
Role Namespace:	<input type="text"/>	<input type="button" value="v"/>
Role Name:	<input type="text"/>	<input type="button" value="🔍"/>
Principal Name:	<input type="text"/>	<input type="button" value="🔍"/>
Group Namespace:	<input type="text"/>	
Group Name:	<input type="text"/>	<input type="button" value="🔍"/>
Attribute Value:	<input type="text"/>	

### Responsibility Lookup search criteria

Title	Description
Template Namespace	Optional. To search for a responsibility based on its template namespace (that is, the name of the application and module to which its responsibility template belongs), select the appropriate namespace.
Template Name	Optional. To search for a responsibility based on the name of the template it is based on, enter the appropriate template name.
Responsibility Namespace	Optional. To search for a responsibility based on its namespace, select the appropriate responsibility namespace.
Responsibility Name	Optional. To search for a responsibility by name, enter its name.
Role Namespace	To search for a responsibility based on the namespace of the role to which it is assigned, enter the appropriate role namespace.
Role Name	Optional. To search for a responsibility based on the role to which it is assigned, enter the appropriate role name.
Principal Name	Optional. To search for a responsibility based on the principals that currently have this responsibility through their association with a role, enter an appropriate principal name.
Group Namespace	Optional. To search for a responsibility based on the namespace of groups that have this responsibility through the group's association with a role, enter an appropriate group namespace.
Group Name	Optional. To search for a responsibility based on the name of a group that has this responsibility through its association with a role, enter an appropriate group name.
Attribute Value	Optional. A specific responsibility detail value associated with a responsibility.

8 items retrieved, displaying all items.

Actions	Template Namespace	Template Name	Responsibility Namespace	Responsibility Name	Responsibility Detail Values	Granted to Roles
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Document Type Name : PCDO, Route Node Name : Account, Required : true,...	KFS-SYS Fiscal Officer
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Route Node Name : CashManagement, Document Type Name : CR, Action Deta...	KFS-FP Cash Manager
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Route Node Name : Campus, Document Type Name : DV, Action Details At R...	KFS-FP Disbursement Manager
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Route Node Name : Purchasing, Document Type Name : DV, Action Details ...	KFS-PURAP Purchasing Processor
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Route Node Name : Tax, Document Type Name : DV, Action Details At Role...	KFS-SYS Tax Manager
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Route Node Name : Travel, Document Type Name : DV, Action Details At R...	KFS-FP Travel Manager
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Route Node Name : PaymentMethod, Document Type Name : DV, Action Detai...	KFS-FP Disbursement Method Reviewer
<a href="#">edit</a> <a href="#">copy</a>	KR-WKFLW	Review	KFS-FP	Review	Document Type Name : PCDO, Route Node Name : AccountFullEdit, Required...	KFS-SYS Fiscal Officer

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

The Responsibility results display contains the fields described in the table below.

### Responsibility Lookup results fields

Title	Description
Actions	Actions allow selection of edit or copy for each responsibility displayed.
Template Namespace	The code identifying the application and module the template pertains to. Because responsibilities pertain to workflow, most responsibility templates are associated with the KR-WKFLW (Kuali Rice-Workflow) namespace.
Template Name	The template the responsibility is based on. A template usually defines, in a broad sense, what the responsibility is. Since responsibilities normally are normally associated with action requests for user review, most responsibilities have a template name of 'Review'.
Responsibility Namespace	The code designating the application and module this responsibility is associated with. This code usually corresponds to the namespace of the document type for which the responsibility generates action requests.
Responsibility Name	The name of this responsibility. In most cases the responsibility name will be the same as the associated template name ('Review').  Like permission names, responsibility names are not unique. Most OLE responsibilities have a name of 'Review'.
Responsibility Detail Values	Display only. Detailed information that defines what document this responsibility generates action requests for, when the requests are generated and how they are handled by workflow.



Unlike permissions, which sometimes have different detail values, responsibility detail values generally contain the elements defined below.

routeNodeName: The point in a document's workflow routing at which this responsibility generates requests.

documentTypeName: The name of the document type for which this responsibility generates action requests. This value may also be a parent document type, which indicates that this responsibility applies to all child documents that contain the appropriate route node.

actionDetailsAtRoleMemberLevel: A True or False indicator that defines where the system collects details of this workflow action request. If the value is 'True,' the system collects action details when members are assigned to the role. If the value is 'False,' the system collects action details when this responsibility is assigned to a role.

required: A True or False value that indicates whether the system is required to generate an action request for this document type. If the value is 'True' and the document generates no requests associated with this responsibility, then the document will go into exception status. If the value is 'False' and the responsibility generates no action requests, then the document continues to route as normal.

Granted to Roles

Lists the namespace and name of roles that have this responsibility. Click on the linked name to view the Role Inquiry.

To view an Inquiry screen for a responsibility, select the **Responsibility Name** of the appropriate row in the search results. The Inquiry contains the same information displayed in the search results in a slightly different format.

**Responsibility Inquiry** expand all collapse all

---

**Responsibility Attributes** hide

Template Namespace:	<a href="#">KR-WKFLW - Workflow</a>
Template Name:	<a href="#">Review</a>
Responsibility Namespace:	<a href="#">OLE-PURAP - Purchasing/Accounts Payable</a>
Responsibility Name:	<a href="#">Review REQS Initiator</a>

---

**Responsibility Detail Values** hide

<b>Detail Values ( documentTypeName - OLE_REQS )</b>	
Attribute Name: documentTypeName	Attribute Value: OLE_REQS
<b>Detail Values ( routeNodeName - Initiator )</b>	
Attribute Name: routeNodeName	Attribute Value: Initiator
<b>Detail Values ( required - FALSE )</b>	
Attribute Name: required	Attribute Value: FALSE
<b>Detail Values ( actionDetailsAtRoleMemberLevel - FALSE )</b>	
Attribute Name: actionDetailsAtRoleMemberLevel	Attribute Value: FALSE

---

**Responsibility Assigned Roles** hide

<b>Assigned Roles ( KR-WKFLW - Workflow - Initiator - Derived Role: Route Log )</b>		
Namespace: <a href="#">KR-WKFLW - Workflow</a>	Role Name: <a href="#">Initiator</a>	Role Type Name: <a href="#">Derived Role: Route Log</a>

close

## Document Layout

The Responsibility document includes **Document Overview**, **Responsibility Info**, and **Responsibility Details** tabs.

<b>Review Responsibility</b> <span style="float: right;">?</span>		<b>Doc Nbr:</b> 3298	<b>Status:</b> INITIATED
		<b>Initiator:</b> amdelaad	<b>Created:</b> 09:20 PM 09/06/2009

[expand all](#) | [collapse all](#)  
\* required field

**Document Overview** ▼ hide

**Document Overview**

\* **Description:**

**Org. Doc. #:**

**Explanation:**

---

**Responsibility Info** ▼ hide

**New**

**Responsibility Identifier:** 10001

\* **Responsibility Namespace:**

\* **Responsibility Name:**

**Responsibility Description:**

\* **Active Indicator:**

---

**Responsibility Details** ▼ hide

**New**

\* **Document Type Name:**

\* **Route Node Name:**

\* **Action Details At Role Member Level:**

\* **Required:**

**Qualifier Resolver Provided Identifier:**

---

**Notes and Attachments (0)** ▶ show

**Ad Hoc Recipients** ▶ show

**Route Log** ▶ show

## Responsibility Info Tab

This tab identifies the responsibility with a unique system-assigned ID number, a namespace, name and description.

**Responsibility Info** ▼ hide

**New**

**Responsibility Identifier:** 10000

\* **Responsibility Namespace:**

\* **Responsibility Name:**

**Responsibility Description:**

\* **Active Indicator:**


### Responsibility Info tab definition

Title	Description
Responsibility Identifier	Display only. The unique, system-assigned ID number that identifies this responsibility.
Responsibility Namespace	Required. An indicator that associates the responsibility with a particular application and module.
Responsibility Name	Required (defaults to 'Review'). A text name identifying this responsibility. Note that this is the only valid value for this document. You cannot use the Responsibility document to establish or modify Responsibilities with the name 'Resolve Exception' -these require a technical resource to modify.
Responsibility Description	Optional. Enter a text description of what this responsibility does.
Active Indicator	Required (defaults to 'Yes'). Change the default selection if you wish this responsibility to be inactive. Inactive responsibilities will be disregarded by Workflow.

## Responsibility Details Tab

This tab identifies the document type and route node associated with this responsibility. It also defines other responsibility information such as whether or not the action details reside at the role member level.

### Responsibility Details tab definition

Title	Description
Document Type Name	Required. Enter the name of the document type this responsibility is associated with or use the <b>Document Type Lookup</b>  to search for and select a value.
Route Node Name	Required. The name of the route node at which this responsibility should be invoked.
Action Details at Role Member Level	Required (defaults to False). Check this box if you want role members associated with this responsibility to be able to define the type of workflow action they will need to take in order to fulfill the action request it generates.
Required	Required (defaults to False). Check this box if you wish documents of this type to go into Exception status if this responsibility does not generate at least one action request.
Qualifier Resolver Provided Identifier	Optional. In most cases this field should be blank. It can be used as an additional identifier KIM will use to choose the correct responsibility information for a given doc type. The document type must pass the provided identifier to KIM.  This is only used in OLE based data for the routing of group documents. The group type ID is populated here and determines how the document routes (Chart and Organization type groups do organization review routing and default group types do not).

## Role



The Role document allows you to create a new KIM role and edit an existing role. Each role aggregates a specific set of permissions and responsibilities and allows you to assign members to the role. OLE contains many existing roles that your institution may want to use as is, but you may also change existing roles and add new ones by using the Role document.

The purpose of each role is defined by its associated permissions and responsibilities. Roles are classified by types that generally indicate the type of permissions and responsibilities with which they can be associated.

### Note

The process of creating a new type requires technical assistance. Consequently, KIM does not provide an interface for creating role types.

# Document Layout

The Role document includes **Document Overview**, **Overview**, **Permissions**, **Responsibilities**, and **Assignees** tabs.

The screenshot shows a web interface for a 'Role' document. At the top, there are fields for 'Doc Nbr: 3267', 'Status: INITIATED', 'Initiator: amdeload', and 'Created: 02:33 PM 09/12/2009'. Below this are 'expand all' and 'collapse all' buttons, and a note '\* required field'. The main content is organized into several tabs, each with a 'hide' button:

- Document Overview**: Contains fields for '\* Description:', 'Org. Doc. #:', and 'Explanation:'.
- Overview**: Contains fields for 'Role: 10000', 'Namespace:', 'Active?: ', 'Type Name: Default', 'Role Name:', and 'Role Description:'.
- Permissions**: Features an 'Add Permission ID:' field with a search icon and an 'add' button. Below is a table with columns: '\* Permission Namespace', 'Permission Identifier', 'Permission Name', 'Permission Detail Values', 'Active Indicator', and 'Actions'.
- Responsibilities**: Features an 'Add Responsibility ID:' field with a search icon and an 'add' button. Below is a table with columns: 'Responsibility Namespace', 'Responsibility Identifier', 'Responsibility Name', 'Responsibility Detail Values', 'Active Indicator', and 'Actions'.
- Assignees**: Features an 'Add:' field with a search icon and a 'Principal' dropdown. Below is a table with columns: 'Type Code', 'Member Identifier', 'Namespace Cd', 'Name', 'Active From Dt', 'Active To Dt', and 'Actions'.
- Delegations**: Features an 'Add:' field with a search icon and a 'Principal' dropdown. Below is a table with columns: 'Role Member', 'Member Type Code', 'Member Identifier', 'Member Namespace Code', 'Member Name', 'Active From Date', 'Active To Date', 'Delegation Type Code', and 'Actions'.
- Ad Hoc Recipients**: Features a 'show' button.
- Route Log**: Features a 'show' button.

At the bottom of the form are 'submit', 'save', 'close', and 'cancel' buttons.

## Overview Tab

This tab identifies the role with a unique system-assigned ID number, a namespace and a name. Each role also has a type which tends to match the types of permissions and responsibilities associated with it.

The screenshot shows the 'Overview' tab of the Role document. It contains the following fields:

- Role:** 10000
- Namespace:** (dropdown menu)
- Active?:**
- Type Name:** Default
- Role Name:** (text field)
- Role Description:** (text field)

### Overview tab definition

Title	Description
Role	Display only. The unique, system-assigned ID number that identifies this role.
Type Name	Display only. Because the role type normally reflects the type of qualifiers this role will need to collect when members are added, this name usually identifies the general types of permissions and responsibilities associated with it.

## Note

When creating a new role, you must select its type before the system will generate the document. See [Creating New Roles](#).


Role Namespace	Required. An indicator that associates the role with a particular application and module.
Role Name	Required. The common descriptive name by which this role is known.
Active	Check this box to indicate that this role is active and is, therefore, to be included by KIM when evaluating permissions and responsibilities. Uncheck the box to indicate that this role is inactive.

## Creating New Roles

When you click the **Create New** button, the system displays the KIM Type Lookup. You must search for and select an existing Type in order for the system to generate a new Role document.

## Note


Note that while the KIM Type Lookup is used when creating new groups and roles, not all KIM types are valid for both. When using this Lookup, you may receive different results depending on the KIM types that are valid for the entity you are working with.


**Kim Type Lookup** 

<b>Namespace Code:</b>	<input type="text"/>
<b>Type Name:</b>	<input type="text"/>
<b>Type Identifier:</b>	<input type="text"/>
<b>Active Indicator:</b>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both

## Permissions Tab


This tab identifies the permissions associated with this role. Permissions authorize specific actions in the system with which they are associated. A role can have any number of permissions (including no permissions) associated with it.

Permissions 

Add Permission ID:  

	* Permission Namespace	Permission Identifier	Permission Name	Permission Detail Values	Active Indicator	Actions
1	KFS-FP	193	Modify Accounting Lines	Property Name : sourceAccountingLines.amount, Document Type Name : DV, Route Node Name : Tax	Yes	<input type="button" value="delete"/>

### Permissions tab definition

Title	Description
Add Permission ID	To add a permission to this role, enter the appropriate permission ID or search for and select a value using the <b>Permission</b> lookup  .
Add	Click the <b>Add</b> button to add the selected permission to this Role document.

After you add a permission to the document, the system displays additional information about the permission.

## Note

Permissions cannot be edited via the Role document. Use the Permission document to perform this function.

### Permissions tab definition, continued

Title	Description
Permission Namespace	Display only. The Namespace identifies the application and module associated with this permission.
Permission Identifier	Display only. The unique system-assigned ID number for this permission.
Permission Name	Display only. The descriptive name of this permission. This often identifies, in general terms, what the permission authorizes.
Permission Detail Values	Display only. The document types, tabs and/or fields this permission authorizes. Not all permissions have detail values.
Active Indicator	Display only. Indicator showing whether this permission is active within the system or not.
Actions	Click the <b>Delete</b> button to remove this permission from the role.


## Note

You may delete a permission only if it has not yet been saved to the database (i.e., you added it to this role but have not yet submitted the document).

## Responsibilities Tab

This tab identifies the responsibilities associated with this role. Responsibilities define the workflow actions that will be requested of the role. A role can have any number of responsibilities (including none) associated with it.

### Responsibilities tab definition

Title	Description
Add Responsibility ID	To add a responsibility to this role enter the responsibility ID or search for and select a value using the <b>Responsibility</b> lookup  .
Add	Click the <b>Add</b> button to add the selected responsibility to this Role document.

After you add a responsibility to the document, the system displays additional information about this responsibility.

## Note

Responsibilities cannot generally be edited via the Role document, but some responsibilities have associated definitions that you must define at the role level. For information about editing responsibilities, see [Responsibility](#).

	Responsibility Namespace	Responsibility Identifier	Responsibility Name	Responsibility Detail Values	Active Indicator	Actions
1	KFS-SYS	1	Review	OrganizationHierarchy, KFS, true, false	Yes	<input type="button" value="delete"/>

### Responsibilities tab definition, continued

Title	Description
Responsibility Namespace	Display only. The Namespace identifies the application and module associated with this responsibility.
Responsibility Identifier	Display only. The unique system-assigned ID number identifying this responsibility.
Responsibility Name	Display only. The descriptive name of this responsibility. For most Responsibilities the name is 'Review'.
Responsibility Detail Values	<p>Display only. This identifies more specific information about the responsibility. Responsibility Detail Values are formatted in a standard way with the following definitions delimited by commas:</p> <p>Route Node: The workflow route level at which this responsibility is invoked.</p> <p>Document Type: The document type for which this responsibility generates workflow requests.</p> <p>Action Details at Role Member Level: A True or False indicator that defines where the details of this workflow action request are defined. If the value is 'True' then action details will be collected when Members are assigned to the role. If the value is 'False' then the action details must be collected when this responsibility is assigned to a role (see <a href="#">Assigning Action Detail Values</a>.)</p> <p>Required: Indicates if the routing represented by this responsibility should be required. If this is set to True and the responsibility fails to generate an action request (perhaps because no one is assigned to the associated Role) then the document will go into Exception status. If this routing is optional this value will be False and the document will simply skip this responsibility if no requests are generated.</p>
Active Indicator	Display only. Indicator showing whether this responsibility is active within the system or not.
Actions	<p>Click the <b>Delete</b> button to remove this responsibility from this role.</p> <p><b>Note</b></p> <p>You can delete a responsibility only if it has not yet been saved to the database (i.e., you have added it to this role but have not yet submitted the document).</p>

## Assigning Action Detail Values

When adding a responsibility with an **Action Detail Values at Role Member Level** value of 'False,' you must complete additional fields in a Responsibility Action sub-section. The system displays this section immediately beneath the responsibility you've just added.

The fields in this sub-section define the type of action requests generated for and the general workflow behavior associated with this responsibility. Entries in these fields cause the system to generate the same type of action requests for all members of this role and handle actions by all members in the same way.

Responsibility Action					
Name	* Action Type Code	Priority Number	* Action Policy Code	Force Action	
All	▼		▼	<input type="checkbox"/>	

### Responsibility Action subsection definition


Title	Description
Name	Display only. The namespace and name of the responsibility associated with these action details.
Action Type Code	Required. The type of action request that the system is to generate for this responsibility. Options include Approve, FYI and Acknowledge.
Priority Number	Optional. If multiple requests are generated at the route node specified on this responsibility, this value determines in the order in which the system will generate these requests. The system processes requests with lower priority numbers before processing requests with higher numbers. Requests with no number are treated as a priority of 1.
Action Policy Code	<p>Required. This value determines what happens if multiple members of this role receive the same action request and one of them takes the action. This currently only applies in situations where a single action request is generated to multiple role members (i.e. the action details exist at the role level) or a role is assigned to another role and these nested role members receive an action request. For example, if a role with a responsibility with action details defined at the role level has three members assigned, all of these members receive the action request defined here; this code determines what the system does when one of them takes action on the document.</p> <p>A value of FIRST indicates that the first role member to take action on the document will automatically clear all the requests for this responsibility that may be in other role member's action lists.</p> <p>A value of ALL indicates that each role member must take individual action to clear his or her requests.</p>
Force Action	Check the box to indicate that each user must take this action for this request even if the user has already previously taken action on this document. Leaving the box unchecked allows a request to be immediately fulfilled if the role member has previously taken action on this specific document.

## Assignees Tab

This tab contains all members who belong to this role. You may also use the tab to add new members and edit the values associated with existing members.

Assignees <span style="float: right;">▼ hide</span>									
	Type Code	Member Identifier	Namespace Cd	Name	Active From Dt	Active To Dt	* Chart Code	* Organization Code	Actions
Add:	Principal ▼	<input type="text"/> 🔍			<input type="text"/> 📅	<input type="text"/> 📅	<input type="text"/> 🔍	<input type="text"/> 🔍	<input type="button" value="add"/>

### Assignees tab definition

Title	Description
Type Code	Required. Role members can be principals (as defined on the Person document), groups or other roles. Select the type of member you want to add to this Role.
Member Identifier	<p>Required. Enter the ID of the member you want to add or use the lookup  to search for and select a valid value. The lookup directs you to the <b>Principal</b>, <b>Group</b> or <b>Role</b> lookup based on your Member Type Code selection.</p>
Namespace Cd	Display only. Identifies the namespace code associated with this role member. Note that only groups and roles will display a namespace code.
Name	Display only. Identifies the name of the member being assigned to this role.
Active From Date	Optional. Allows you to qualify this member's association with this role by date. Entering a from date will define the earliest date on which this member is a valid member of this role.



Active To Date

Optional. Allows you to deactivate a member's association with a role on a specific date. The date you enter defines the date the user is no longer a member of this role.

### Note

You cannot delete or inactivate role members. To remove a member from a role, specify an active to date.

Actions

Click the **Add** button to add this member to the role.

### Note

Additional fields may be required, such as Chart Code or Organization Code, depending on the role type selected.

### Note

Note that when assigning roles to other roles (nesting roles), qualifying values are not required. Some roles in OLE base data contain special logic to derive the required qualifiers from the nested role itself without qualifiers being specified. You may always specify qualifying values for a nested role and should do so unless you know the role being assigned contains logic to derive the qualifiers from the nested role. Roles without the proper qualifiers can cause problems throughout your OLE instance. Please consult with a OLE technical resource if you are unsure of whether or not to provide qualifying values when assigning a role to another role.



## Delegations Tab

This tab identifies delegates associated with the role. Delegates are users that a member of this role has authorized to have the same permissions and take the same actions as the member is authorized to take.

The Assignees Tab dealing with Delegates is slightly different as detailed in the following table. Note that if the members of a role require qualifying values, the delegation requires these values as well. In most cases, delegates must have the same qualifiers as the role member they are associated with.

	Role Member	Member Type Code	Member Identifier	Member Namespace Code	Member Name	Active From Date	Active To Date	* Chart Code	Delegation Type Code	Actions
Add:	<input type="text"/>	Principal	<input type="text"/>			<input type="text"/>	<input type="text"/>	<input type="text"/>		<input type="button" value="add"/>

### Delegations tab definition


Title	Description
Role Member	Required. Use the lookup  to search for and return the member of this role you wish to create a delegate for.
Member Type Code	Required. Delegates may be principals (as defined on the Person document), groups or other roles. Select the type of delegate you want to add to this role.
Member Identifier	Required. Enter the ID that identifies the delegate you want to add or use the lookup  to search for and select a valid value. Note that the lookup will direct you to the <b>Principal</b> , <b>Group</b> or <b>Role</b> lookup based on your Member Type Code selection.
Member Namespace Code	Display only. Identifies the namespace associated with the selected delegate. Note that only delegations to groups or roles will display a member namespace code.
Member Name	Display only. Shows the name of the selected delegate.
Active From Date	Optional. If you want you can qualify this delegate's association with this role by date. Entering a from date will define the earliest date on which this delegate is a valid delegate for this role.

Active To Date	Optional. Allows you to deactivate a delegate's association with a role on a specific date. The date you enter defines the date on which the user is no longer a delegate for this role.
	<b>Note</b>
	You cannot delete or deactivate delegates. To remove a delegate from a role, enter an active to date.
Delegation Type Code	Required. Select 'Secondary' or 'Primary'. Note that this selection only applies to responsibilities associated with the role and indicates if the delegate will receive documents directly in their action list (Primary) or may choose to view documents in their action list using the secondary delegate list (Secondary).
Actions	Click the <b>Add</b> button to add this delegate to the role.

**Note**

Additional fields may be required depending on the role type selected.

## Role/Group/Permission/Responsibility Type



When the user selects the **Role/Group/Permission/Responsibility Type** option from the **Admin** menu tab, the system displays the Kim Type Lookup screen. Types are used to associate similar roles, groups, permissions and responsibilities. For example, all roles with the type of 'Campus' will collect a campus code for each member as a piece of qualifying data to tell KIM which campus that member is associated with. New types cannot be created via the interface. Development work needs to occur to make sure that KIM knows how to handle any new type added to the system.

## Document Layout

15 items retrieved, displaying all items.


Namespace Code	Type Name	Type Identifier	Active Indicator
KR-NS	Namespace or Component	10	Yes
KR-NS	Component Field	11	Yes
KR-NS	Namespace or Action	12	Yes
KR-NS	Button	13	Yes
KR-NS	Edit Mode & Document Type	14	Yes
KR-NS	Batch Feed or Job	15	Yes
KR-NS	Parameter	16	Yes
KR-NS	Campus	17	Yes
KR-NS	Derived Role: Permission (Edit Document)	45	Yes
KR-NS	Document Type & Existing Records Only	56	Yes
KR-NS	Component Section	57	Yes
KR-NS	Document Type & Relationship to Note Author	59	Yes
KR-NS	Derived Role: Permission (Open Document)	60	Yes
KR-NS	Namespace	67	Yes
KR-NS	Document Type & Attachment Type	9	Yes

### Kim Type Lookup results definition

Title	Description
Namespace Code	Display only. The namespace code associated with this type.
Type Name	Display only. The descriptive name of this type. Clicking the name takes you to the Type Inquiry and displays the same information available in the lookup plus the name of the KIM service this type is associated with.  The 'service' is the piece of code that tells KIM how to interpret roles, groups, permissions or responsibilities of a given type.
Type Identifier	Display only. The unique identifying number assigned to this type.
Active Indicator	Display only. Indicates whether this type is active. Inactive types are not eligible for selection when creating new roles, groups, permissions, or responsibilities.

---

# Chapter 8. System Admin Maintenance Documents

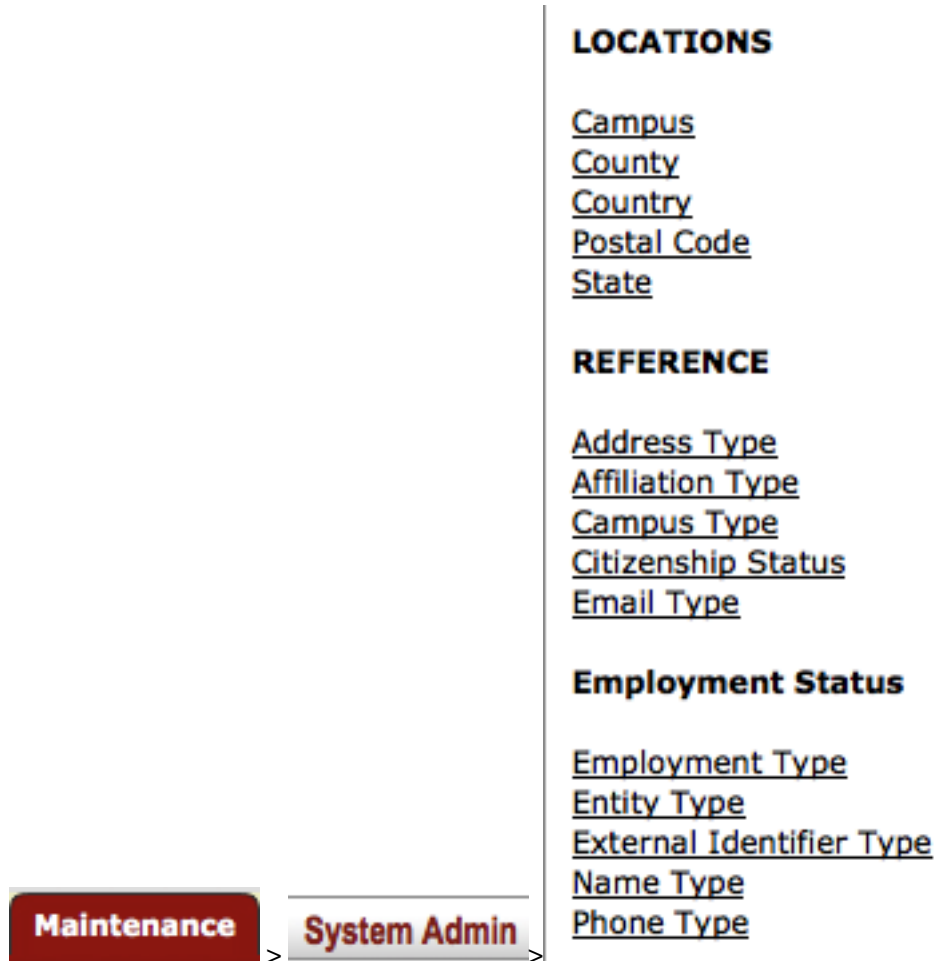

System Admin maintenance e-docs are available via the System Admin submenu on the **Maintenance** menu.

## Campus



The CampusMaintenanceDocument is used to identify the different fiscal and physical operating entities of an institution for use in OLE. A campus may be identified as a fiscal entity, a physical entity, or both.

When the user chooses the Campus option, the system displays the Campus Lookup screen. After the user selects a campus or clicks the create new button, the system presents the CampusMaintenanceDocument.

## Document Layout

The screenshot shows a web form for 'CampusMaintenanceDocument'. At the top, it displays 'Doc Nbr: 3268', 'Status: INITIATED', 'Initiator: amdelaad', and 'Created: 03:28 PM 09/12/2009'. Below this are two main sections: 'Document Overview' and 'Edit Campus'. The 'Document Overview' section has fields for '\* Description:', 'Org. Doc. #:', and 'Explanation:'. The 'Edit Campus' section has a 'New' sub-section with fields for '\* Campus Code:', '\* Campus Name:', '\* Campus Short Name:', and '\* Campus Type Code:'. Below these are sections for 'Notes and Attachments (0)', 'Ad Hoc Recipients', and 'Route Log', each with a 'show' button. At the bottom are 'submit', 'save', 'close', and 'cancel' buttons.

## Edit Campus Tab

The CampusMaintenanceDocument includes the **Edit Campus** tab.

In edit mode, the **Edit Campus tab** presents a display-only set of fields on the left and editable fields on the right in which the user may enter changes.

### Edit Campus tab definition

Title	Description
Campus Code	Required. The unique identifying code assigned to a campus.
Campus Name	Required. The familiar name for a specific university campus.
Campus Short Name	Required. An abbreviated name for a specific campus; used in reports in which space is limited.
Campus Type Code	Required. Indicates the type of campus. Valid values are: B: - Both F - Fiscal P - Physical

## Country



The Country Maintenance document is used to assign specific identifying codes to country names.

When the user chooses the **Country** option from the menu, the system displays the Country Lookup screen. After the user selects a country or clicks the **create new** button, the system presents the Country Maintenance document.

## Document Layout

CountryMaintenanceDocument ?	Doc Nbr: 5387	Status: INITIATED
	Initiator: ole_khuntey	Created: 12:34 PM 06/19/2013

\* required field

Document Overview

**Document Overview**

\* Description:

Organization Document Number:

Explanation:

---

Edit Country

**New**

\* Country Code:

\* Country Name:

Alternate Country Code:

Active Indicator:

---

Notes and Attachments (0)

Ad Hoc Recipients

Route Log

---

## Edit Country Tab


The Country Maintenance document includes the **Edit Country** tab.

In edit mode, the **Edit Country** tab presents a display-only set of fields on the left and editable fields on the right in which the user may enter changes.

### Edit Country tab definition

Title	Description
Country Code	Required. A unique identifying code assigned to a country.
Country Name	Required. A familiar name of a specific country.
Alternate Country Code	An alternative code assigned to a country.
Active Indicator	Indicates whether this country code is active or inactive in OLE. Remove the check mark to deactivate this country code.

## County

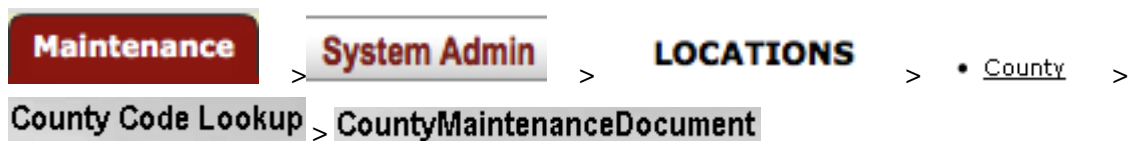

The County Maintenance document is used to assign specific identifying codes to county names.

When the user chooses the **County** option from the **Admin** menu tab, the system displays the County Lookup screen. After the user selects a county or clicks the **create new** button, the system presents the County Maintenance document.

## Document Layout

### Edit Counties Tab

The County Maintenance document includes the **Edit Counties** tab.

In edit mode, the **Edit Counties** tab presents a display-only set of fields on the left and editable fields on the right in which the user may enter changes.

#### Edit Counties tab definition

Title	Description
Country Code	The country code for the country in which this county is located.
County Code	A unique identifying code assigned to this county.
State	The state abbreviation assigned to the state in which a county is located.
County Name	Required. The familiar name of this county.
Active Indicator	Indicates whether the county code is active or inactive in OLE. Remove the check mark to deactivate this county code.

## Postal Code



The Postal Code Maintenance document defines the zip code by city and state. When the user chooses the **Postal Code** option from the **Admin** menu tab, the system displays the Postal Code Lookup screen. After the user selects a postal code or clicks the **create new** button, the system presents the Postal Code Maintenance document.

### Note

The user may also enter a city and state to find the associated zip code.

## Document Layout

## Edit Postal Codes Tab

The Postal Code Maintenance document includes the **Edit Postal Codes** tab.

In edit mode, the **Edit Postal Codes** tab presents a display-only set of fields on the left and editable fields on the right in which the user may enter changes.

### Edit Postal Codes tab definition

Title	Description
Country Code	The country code for the country associated with the zip (postal) code.
Postal Code	Identifies a Postal Service code.
State	Required. The state associated with the zip (postal) code.
County Code	The unique identifying code for the county associated with the zip (postal) code.
City Name	Required. The name of the city associated with the zip (postal) code.
Active Indicator	Indicates whether the postal code is active or inactive in OLE. Remove the check mark to deactivate this postal code.

## State



The State Maintenance document defines the U.S. Postal Service codes used to identify states. When the user chooses the **State** option from the **Admin** menu tab, the system displays the State Code Lookup screen. After the user selects a state code or clicks the **create new** button, the system presents the State Maintenance document.



## Document Layout

The screenshot shows the 'StateMaintenanceDocument' interface. At the top, there is a header with 'Doc Nbr: 3275', 'Status: INITIATED', 'Initiator: amdelgad', and 'Created: 03:59 PM 09/12/2009'. Below this is a 'Document Overview' tab with fields for '\* Description:', 'Org. Doc. #:', and 'Explanation:'. The 'Edit States' tab is active, showing a 'New' section with fields for '\* Country Code:', '\* State Abbreviation:', '\* State Name:', and 'Active Indicator:'. There are also sections for 'Notes and Attachments (0)', 'Ad Hoc Recipients', and 'Route Log', each with a 'show' button. At the bottom, there are buttons for 'submit', 'save', 'close', and 'cancel'.

## Edit States Tab

The State Maintenance document includes the **Edit States** tab.

In edit mode, the **Edit States** tab presents a display-only set of fields on the left and editable fields on the right in which the user may enter changes.

### Edit States tab definition

Title	Description
Country Code	A unique identifying code assigned to the country of which this state is a part.
State Abbreviation	The state abbreviation.
State Name	Required. The full name of the state associated with the state abbreviation.
Active Indicator	Indicates whether the state code is active or inactive in OLE. Remove the check mark to deactivate the state code.

## Address Type



The Address Type Lookup displays the types of addresses that may be associated with Person records in KIM.

### Note

Address types cannot be edited via the interface. Technical assistance is required to add new or edit existing address types.

## Document Layout

**Address Type Lookup** \* required field

Address Type Code:	<input type="text"/>
Address Type Name:	<input type="text"/>
Active Indicator:	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

3 items retrieved, displaying all items.

Address Type Code	Address Type Name	Display Sort Code	Active Indicator
HM	Home	b	Yes
OTH	Other	c	Yes
WRK	Work	a	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Address Type Lookup results definition

Title	Description
Address Type Code	Display only. The unique code for this type of address.
Address Type Name	Display only. The familiar title of this address type.
Display Sort Code	Display only. An alphabetical character used to determine the order in which address types are displayed in the list on the Person document.
Active Indicator	Display only. Indicates whether this address type is active (in which case the system displays it in the Address Type list on the Person document).

## Affiliation Type

Maintenance > 
 System Admin > 
 REFERENCE > 
 • Affiliation Type > 
 **Affiliation Type Lookup**

Affiliation types specify codes and text descriptions for the different types of affiliations that can be associated with a Person record in KIM. These codes may be used for data sorting or retrieval purposes. The Affiliation Type Lookup displays the valid affiliation code types.

### Note

Affiliation types cannot be edited via the interface. Technical assistance is required to add new or edit existing affiliation types.

## Document Layout

**Affiliation Type Lookup** \* required field

Affiliation Type Code:	<input type="text"/>
Affiliation Type Name:	<input type="text"/>
Active Indicator:	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

4 items retrieved, displaying all items.

Affiliation Type Code	Affiliation Type Name	Display Sort Code	Active Indicator
AFLT	Affiliate	d	Yes
FCLTY	Faculty	b	Yes
STAFF	Staff	c	Yes
STDNT	Student	a	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Affiliation Type Lookup results definition

Title	Description
Affiliation Type Code	Display only. A unique code that identifies this type of affiliation. The base values are:  AFLT = Affiliate, FCLTY = Faculty, STAFF = Staff, STDNT = Student
Affiliation Type Name	Display only. A text description of this type of affiliation.
Display Sort Code	Display only. An alphabetical character used to determine the order in which the system displays affiliation types in the list.
Active Indicator	Display only. Indicates whether this type of affiliation is active (in which case the system displays it in the <b>Affiliation Typelist</b> on the Person document).

## Campus Type



When the user selects **Campus Type** from the **Admin** menu tab, the system displays the Campus Type Lookup. From this screen, the user may either create a new type or search for an existing type. This defines the valid types of campuses that can be selected when creating a new campus.

After performing a search based on user-specified criteria, the system displays a results table. The user may then choose to edit or copy a retrieved record.

After the user selects **create new**, **edit**, or **copy**, the system displays the Campus Type Maintenance document. This document allows users to add and maintain campus types.

### Note

While anyone can view the current values for campus type, only members of OLE-SYS Manager or KR-SYS Technical Manager roles can create new campus types or edit existing values. This document does not route for approval.

## Document Layout

**CampusTypeMaintenanceDocument** ?

<b>Doc Nbr:</b> 5395	<b>Status:</b> INITIATED
<b>Initiator:</b> ole-khuntley	<b>Created:</b> 01:22 PM 06/19/2013

[expand all](#) | [collapse all](#)  
 \* required field

Document Overview
▼ hide

**\* Description:**

**Organization Document Number:**

**Explanation:**

Edit Campus Type
▼ hide

**New**

**\* Campus Type Code:**

**\* Campus Type Name:**

**Notes and Attachments (0)** ▶ show

**Ad Hoc Recipients** ▶ show

**Route Log** ▶ show

submit save close cancel

## Edit Campus Type Tab

The Campus Type Maintenance document includes the **Edit Campus Type** tab.

In edit mode, the **Edit Campus Type** tab presents a display-only set of fields on the left and editable fields on the right in which the user may enter changes.

### Edit Campus Type tab definition

Title	Description
Campus Type Code	Required. Enter a code to identify this type of campus.
Campus Type Name	Required. Enter a descriptive name for this campus type.

## Citizenship Status



The Citizenship Status Lookup is used to display the types of statuses that may be entered on a Person record in KIM.

### Note

Citizenship Status cannot be edited via the interface. Technical assistance is required to add new or edit existing status types.

## Document Layout


A screenshot of the 'Citizenship Status Lookup' search form. It features three input fields: 'Citizenship Status Code', 'Citizenship Status Name', and 'Active Indicator'. The 'Active Indicator' field has radio buttons for 'Yes' (selected), 'No', and 'Both'. Below the fields are three buttons: 'search', 'clear', and 'cancel'. The form is displayed on a light grey background.

No values match this search.

### Citizenship Status Lookup results definition

Title	Description
Citizenship Status Code	The code used to identify citizen status.
Citizenship Status Name	The familiar name of the citizen status.
Active Indicator	Display only. Indicates whether this citizen status type is active (in which case the system displays it in the <b>Citizen Status</b> list on the Person document).

# Email Type

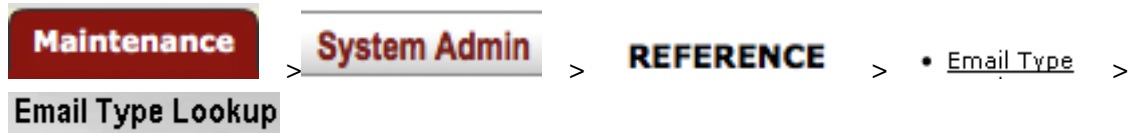

The Email Type Lookup is used to display the types of email addresses that may be entered on a Person record in KIM.

## Note

Email types cannot be edited via the interface. Technical assistance is required to add new or edit existing email types.

## Document Layout

**Email Type Lookup** \* required field

Email Type Code:	<input type="text"/>
Email Type Name:	<input type="text"/>
Active Indicator:	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both

3 items retrieved, displaying all items.

Email Type Code	Email Type Name	Display Sort Code	Active Indicator
HM	Home	b	Yes
OTH	Other	c	Yes
WRK	Work	a	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Email Type Code Lookup results definition

Title	Description
Email Type Code	Display only. A unique code identifying this type of email address. The base data values are: HM = Home, OTH = Other, WRK = Work
Email Type Name	Display only. A descriptive label for this type of email address.
Display Sort Code	Display only. An alphabetical character used to determine the order in which email address types are displayed in the list on the Person record.
Active Indicator	Display only. Indicates whether this email address type is active (in which case the system displays it in the <b>Email Type</b> list on the Person document).

# Employee Type



The Employee Type Lookup allows you to view the various status codes that can be assigned to a faculty or staff type of affiliation on the Person document in KIM.

## Note

Employee types cannot be edited via the interface. Technical assistance is required to add new or edit existing employee types.

## Document Layout

**Employee Type Lookup** \* required field

---

Employee Type Code:	<input type="text"/>
Employee Type Name:	<input type="text"/>
Active Indicator:	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both

3 items retrieved, displaying all items.

Employee Type Code	Employee Type Name	Display Sort Code	Active Indicator
N	Non-Professional	02	Yes
O	Other	99	Yes
P	Professional	01	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Employee Type Lookup results definition

Title	Description
Employee Type Code	Display only. A unique code identifying this type of employee. The base data values are:  N = Non-Professional, O = Other, P = Professional
Employee Type Name	Display only. A descriptive label for this type of employee.
Display Sort Code	Display only. A numeric value used to determine the order in which employee types are displayed in the list.
Active Indicator	Display only. Indicates whether this employee type is active (in which case the system displays it in the <b>Employee Type</b> list on the Person document).

## Entity Type



The Entity Type Lookup displays the various entity types recognized in KIM.

## Note

Entity types cannot be edited via the interface. Technical assistance is required to add new or edit existing entity types.

## Document Layout

**Entity Type Lookup** \* required field

Entity Type Code:	<input type="text"/>
Entity Type Name:	<input type="text"/>
Active Indicator:	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

2 items retrieved, displaying all items.

Entity Type Code	Entity Type Name	Display Sort Code	Active Indicator
PERSON	Person	01	Yes
SYSTEM	System	02	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Entity Type Lookup results definition

Title	Description
Entity Type Code	Display only. A unique code that identifies this entity type. The base data values are:  PERSON = Person, SYSTEM = System
Entity Type Name	Display only. A descriptive label for this entity type.
Display Sort Code	Display only. A numeric value used to determine the order in which entity types would be displayed in a list.
Active Indicator	Display only. Indicates whether this entity type is active. Because entity types are not viewable elsewhere in the application, inactivation will have no apparent effect.

## External Identifier Type



The External Identifier Type Lookup displays the identifiers that may be associated with a Person record that has been generated by a non-Kuali system. The only example in OLE base data is Tax ID number.

### Note

External identifier types cannot be edited via the interface. Technical assistance is required to add new or edit existing external identifier types.

## Document Layout

**External Identifier Type Lookup** \* required field

External Identifier Type Code:	<input type="text"/>
External Identifier Type Name:	<input type="text"/>
Active Indicator:	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both
<input type="button" value="search"/> <input type="button" value="clear"/> <input type="button" value="cancel"/>	

One item retrieved.

External Identifier Type Code	External Identifier Type Name	Display Sort Code	Active Indicator
TAX	Tax ID	03	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### External Identifier Lookup results definition

Title	Description
External Identifier Type Code	Display only. A unique code that identifies this external identifier type. The base data value is:  TAX = Tax ID
External Identifier Type Name	Display only. A descriptive label for this external identifier type.
Display Sort Code	Display only. A numeric value that determines the order in which external identifier types are displayed in the list.
Active Indicator	Display only. Indicates whether this external identifier type is active.

## Name Type

Maintenance > 
 System Admin > 
 Employment Status > 
 Name Type > 
 Entity Name Type Lookup

The Entity Name Type Lookup allows you to view the types of names that can be associated with a person on the **Contact** tab of a KIM Person document.

### Note

Name types cannot be edited via the interface. Technical assistance is required to add new or edit existing name types.

## Document Layout

**Entity Name Type Lookup** \* required field

---

Entity Name Type Code:	<input type="text"/>
Entity Name Type Name:	<input type="text"/>
Active Indicator:	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Both

---

3 items retrieved, displaying all items.

Entity Name Type Code	Entity Name Type Name	Display Sort Code	Active Indicator
OTH	Other	c	Yes
PRFR	Preferred	b	Yes
PRM	Primary	a	Yes

Export options: [CSV](#) | [spreadsheet](#) | [XML](#)

### Entity Name Type Lookup results definition

Title	Description
Entity Name Type Code	Display only. A unique code that identifies this type of name. The base data values are:  OTH = Other, PRFR = Preferred, PRM = Primary
Entity Name Type Name	Display only. A descriptive label for this name type.
Display Sort Code	Display only. An alphabetic value that determines the order in which name types are displayed in the list.
Active Indicator	Display only. Indicates whether this name type is active (in which case the system displays it in the <b>Name Typelist</b> on the Person document).



# Phone Type




The Phone Type Lookup displays codes that identify various categories of phone numbers on the Person document.

## Note

Phone types cannot be edited via the interface. Technical assistance is required to add new or edit existing phone types.

## Document Layout

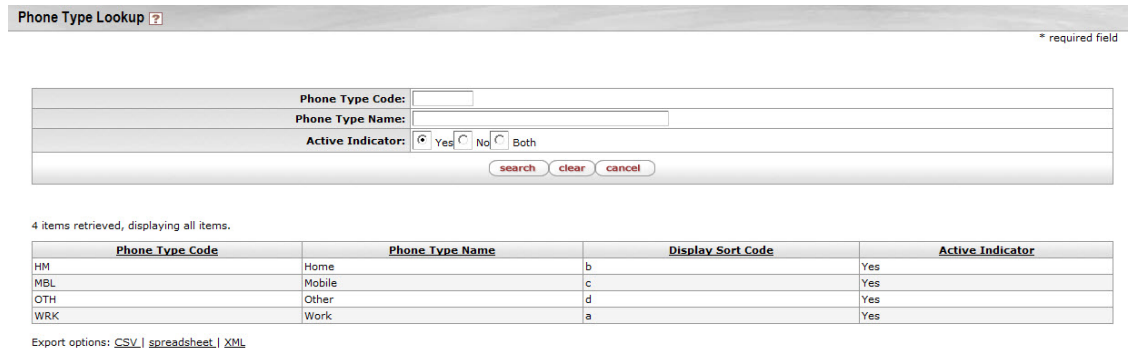

### Phone Type Lookup results definition

Title	Description
Phone Type Code	Display only. The code that identifies the type of phone number.
Phone Type Name	Display only. The descriptive name for this type of phone number.
Display Sort Code	Display only. An alphabetic value that determines the order in which phone types are displayed in the list.
Active Indicator	Display only. Indicates whether this phone type is active (in which case the system displays it in the <b>Phone Type</b> list on the Person document).